

BASIC STRUCTURAL ANALYSIS

CIVIL ENGINEERING VIRTUAL LABORATORY

EXPERIMENT: 4

COLUMNS

INTRODUCTION:

Structural members that support compressive axial loads are called Columns. A column in structural engineering is a vertical structural element that transmits, through compression, the weight of the structure above to other structural elements below.

OBJECTIVE:

To determine the Column stability using boundary conditions, also to study behavior of different types of columns and find Euler's buckling load for each case

THEORY:

In general if a beam element is under a compressive load and its length is an order of magnitude larger than either of its other dimensions such a beam is called columns. Due to its size its axial displacement is going to be very small compared to its lateral deflection called buckling.

The loads that are coming to column are more than the weight of the column the buckling factor takes place. A column can either fail due to the material yielding, or because the column buckles, it is of interest to the engineer to determine when this point of transition occurs.


Consider the Euler buckling equation

$$P_E = \frac{\pi^2 EI}{L^2}$$

where L = Length of the Column (ft)

E = Young's Modulus (Ksi)

I = Moment of Inertia (mm⁴)

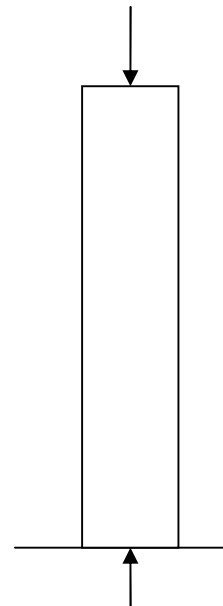


Because of the large deflection caused by buckling, the least moment of inertia I can be expressed as $I = Ar^2$

A is the cross sectional area


R is the radius of gyration.

The critical loads for the different sections given by


- 1) Pinned-Pinned column buckling load for Length $L = L$

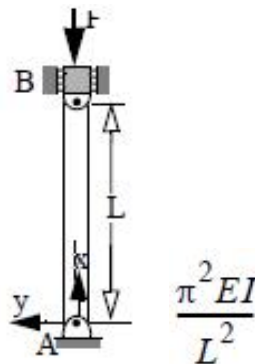


- 2) Fixed-Fixed column buckling load for length $L = (L/2)^2$

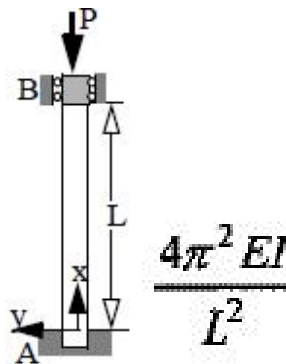

- 3) Fixed-Pinned column buckling load for length $L = (L/\sqrt{2})^2$



4) Fixed-Free column buckling load for length $L = (L/2L)^2$



Critical Column Stress:

Dividing the buckling equation by A , gives $\sigma_E = \frac{P_E}{A} = \frac{\pi^2 E}{(L/r)^2}$

σ_E is the compressive stress in the column and must not exceed the yield stress σ_Y of the material, i.e. $\sigma_E < \sigma_Y$, L/r is called the slenderness ratio, it is a measure of the column's flexibility

Critical Buckling Load:

P_{crit} is the critical or maximum axial load on the column just before it begins to buckle
 E Young's modulus of elasticity

I least moment of inertia for the column's cross sectional area.

L unsupported length of the column whose ends are pinned

Input values given based on the condition:

1. Young's modulus: _____ (ksi)
2. Area moment of inertia (I): _____ (mm^4)
3. Length of column (L): _____ (ft)
4. Boundary conditions

Apparatus: -

Column Buckling Apparatus

Weights, Hanger

Dial Gauge

Scale

Verniar caliper

Lab Procedure: -

- Pin a graph paper on the wooden board behind the column.
- Apply the load at the top of columns increasing gradually. At certain stage of loading the columns shows abnormal deflections and gives the buckling load.
- Note the buckling load for each of the four columns.
- Trace the deflected shapes of the columns over the paper. Mark the points of change of curvature of the curves and measure the effective or equivalent length for each case separately.
- Calculate the theoretical effective lengths and thus buckling loads by the expressions given above and compare them with the observed values.

OBSERVATION:

Section Type	Types of Joints	Young's modulus (Ksi)	Area of M.I (mm ⁴)	Length of column (ft)	Boundary conditions	Area of Cross Section (A)	Radius of Gyration(R)	Critical buckling load	
Column	1) Pinned-Pinned column buckling load								
Column	2) Fixed-Fixed column buckling load								
Column	3) Fixed-Pinned column buckling load								
Column	4) Fixed-Pinned column buckling load								

Sample Calculation: - End condition: Both ends fixed

$$\text{Euler's buckling load.} = P = \pi^2 EI / l^2$$

Effective Length (mm)

QUIZ:

- 1) The buckling load formula for column?
- 2) Number of boundary conditions that are present in columns
- 3) What are the constant values that doesn't change in calculation of P_{cr}


REFERENCES:

Mechanics of materials by Dr.B.C.punmia

Stability of columns by YI Nagorny

Design of steel structures by Prof.S.R.Satish Kumar and Prof A.R.Santha Kumar

PART – 2
ANIMATION STEPS

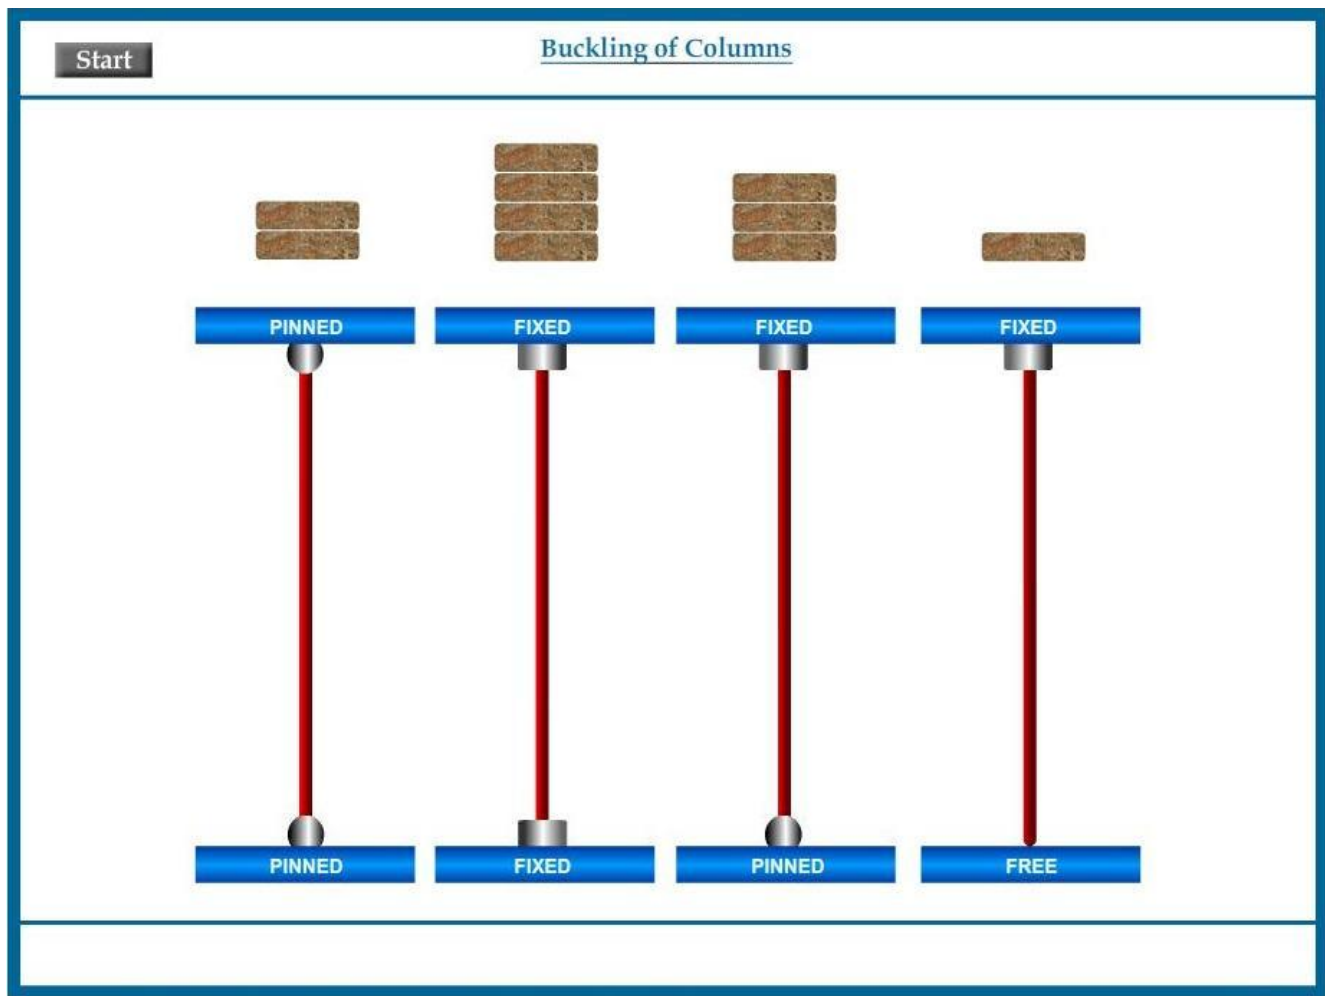

PART – 3

VIRTUAL LAB FRAME

Re-Start Stop Next

Buckling of Columns

Change Input Parameters Show Results

Length	<input type="text" value="8.0"/>	:: 8.0 m	Column Material	Concrete	Effective Leng...	8.0
Column Breadth	<input type="text" value="350.0"/>	:: 350.0 m	Material Grade			
Depth	<input type="text" value="350.0"/>	:: 350.0 m	End Conditions	Both Ends Pinned	Factor of safety	1