



NRU - B7

Features & Application


- Ground install
- High intensity temperature glass
- Stainless steel panel
- Maximum wattage 24w
- Aluminium alloy fitting with Polyester Powder Coating on surface
- Different beam angles can be chosen to suit various applications
- Good quality light available in 3000K/4500K/6000K
- Applied in gardens, buildings .etc



LED Underground Light



IP65 dual-waterproof
Stainless steel ring
Recessed box design

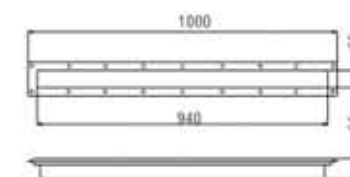

Unit:mm



Product Model	B7-12w	B7-24w
Rated Power	12w	24W
LED Quantity	12pcs	24pcs
Light Color	3000K/4500K/6000K or R/G/B/A/RGB	
Beam Angle	10°/15°/30°/45°/60°/90°	
Input Voltage	DC24V/AC220V	
Control Mode	Constant Voltage/ DMX 512	
Panel	Stainless Steel	
Body	Aluminium	