



NRU - B5

Features & Application


- Ground install
- High intensity temperature glass
- Stainless steel panel
- Maximum wattage 36w
- Aluminium alloy fitting with Polyester Powder Coating on surface
- Different beam angles can be chosen to suit various applications
- Good quality light available in 3000K/4500K/6000K
- Applied in gardens, lighting trees, buildings,squares, etc.



LED Underground Light



IP65 dual-waterproof
Stainless steel ring
Recessed box design

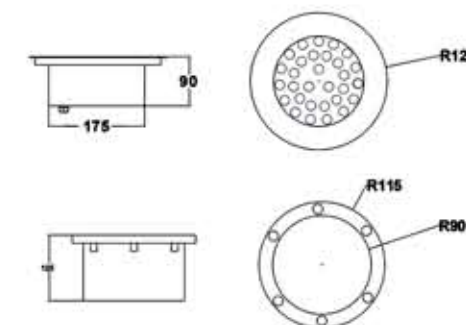

Product Model	B5-30w	B5-36w
Rated Power	30w	36W
LED Quantity	30pcs	36pcs
Light Color	3000K/4500K/6000K or R/G/B/A	RGB
Beam Angle	10°/15°/30°/45°/60°	
Input Voltage	DC24V/AC220V	
Control Mode	Constant Voltage/ DMX512	
Panel	Stainless steel	
Body	Aluminium	