



NRU - L1

Features & Application


- Full luminous efficiency up to 120 lm/w
- Installation : ceiling mounting / pendant-mounting / recessed
- Maximum wattage 54w
- High Light efficiency
- Aluminium alloy fitting with Polyester Powder Coating on surface
- type of chip : 2835
- Good quality light available in 3000k/4000k/6000k
- Applied in decorative lighting , internal and architectural lighting



LED Linear Light



Homogeneous lighting and flicker-free

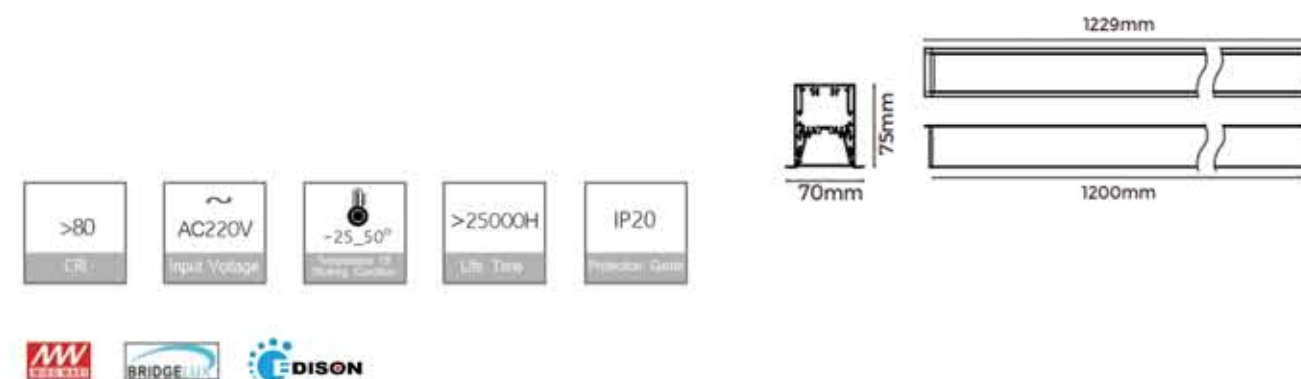

Product Model	L1-18w	L1-22w	L1-36w	L1-54w
Rated Power	18W	22W	36W	54W
Lumen output	2200 lm	2700 lm	4500 lm	6700 lm
Light Color	3000K/4000K/6000K			
Beam Angle	85°			
Input Voltage	AC220V			
Control Mode	Constant Voltage			
Panel	Diffuser			
Body	Aluminium			
Length	120 cm	120 cm	120 cm	120 cm