




NRU - B6

Features & Application


- Ground install
- High intensity temperature glass
- Aluminium panel
- Maximum wattage 4w
- Aluminium alloy fitting with Polyester Powder Coating on surface
- Different beam angles can be chosen to suit various applications
- Good quality light available in 3000K/4500K/6000K
- Applied in lobbies, gardens, buildings.etc

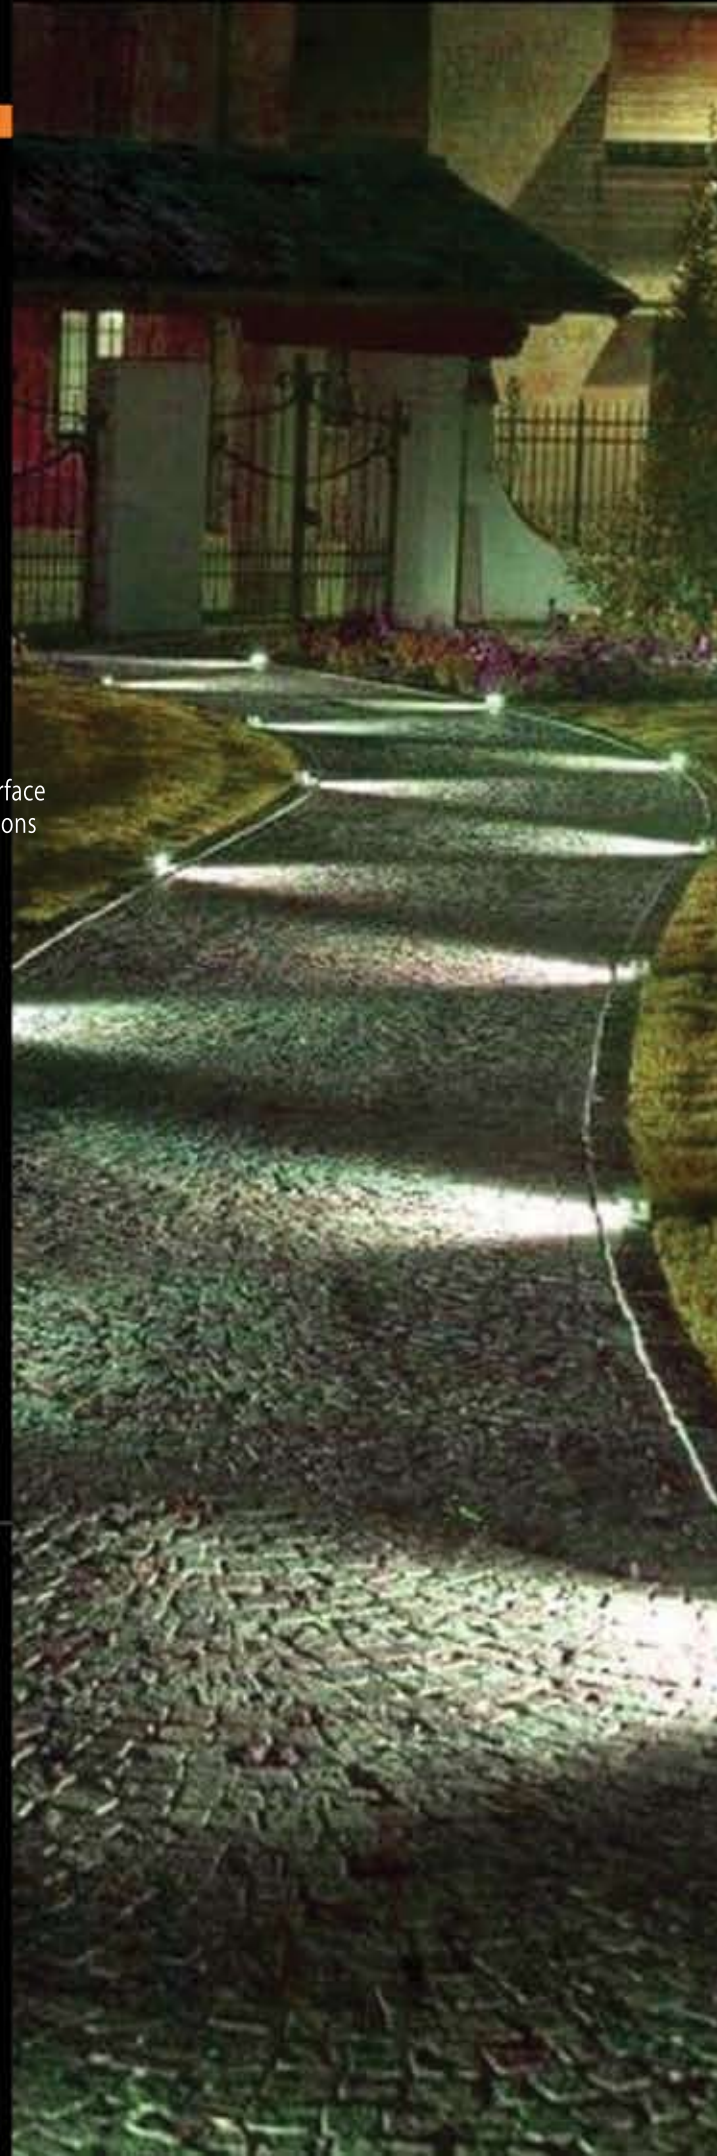

LED Underground Light



IP65 dual-waterproof
Stainless steel ring
Recessed box design

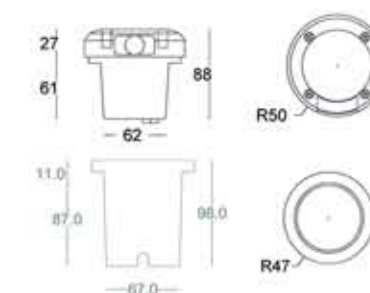

Product Model	B6-1w	B6-2w	B6-4w
Rated Power	1w	2w	4w
LED Quantity	1pcs	2pcs	4pcs
Light Color	3000K/4500K/6000K or R/G/B/A		
Beam Angle	10°/15°/30°/45°/60°/90°		
Input Voltage	DC5V/AC220V		
Control Mode	Constant Voltage		
Panel	Aluminium		
Body	Aluminium		