



NRU - B3

Features & Application


- Ground install
- High intensity temperature glass
- Stainless steel panel
- Maximum wattage 7w
- Aluminium alloy fitting with Polyester Powder Coating on surface
- Different beam angles can be chosen to suit various applications
- Good quality light available in 3000K/4500K/6000K
- Applied in gardens, lighting trees, buildings, squares .etc



LED Underground Light



IP65 dual-waterproof
Stainless steel ring
Recessed box design

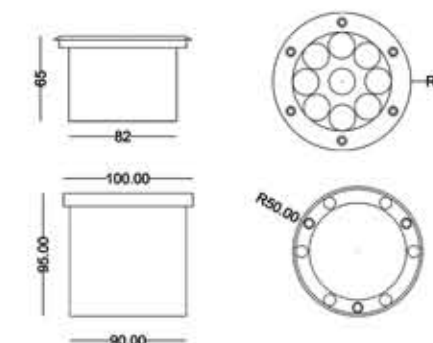

Product Model	B3-6w	B3-7w
Rated Power	6w	7W
LED Quantity	6pcs	7pcs
Light Color	3000K/4500K/6000K or R/G/B/A	
Beam Angle	10°/15°/30°/45°/60°/90°/120°	
Input Voltage	DC24V/AC220V	
Control Mode	Constant current	
Panel	Stainless steel	
Body	Aluminium	