



NRU - B1

Features & Application


- Ground install
- High intensity temperature glass
- Aluminium panel
- Maximum wattage 3w
- Aluminium alloy fitting with anodic oxidation on surface
- Different beam angles can be chosen to suit various applications
- Good quality light available in 3000K/4500K/6000K
- Applied in gardens, squares, pedestrian streets, aisles .etc



LED Underground Light



IP65 dual-waterproof
Recessed box design

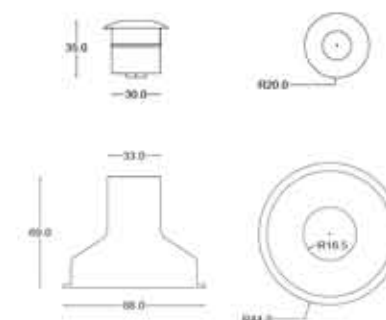

Product Model	B1-1w	B1-3w
Rated Power	1w	3W
LED Quantity	1pcs	1pcs
Light Color	3000K/4500K/6000K or R/G/B/A	
Beam Angle	10°/15°/30°/45°/60°	
Input Voltage	DC5V/AC220V	
Control Mode	Constant Voltage	
Panel	Aluminium	
Body	Aluminium	