

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

☐ XOR activation

☐ One Pulse Mode

Configuration


Reset Configuration

☒ Parameter Set Restore default values for all peripheral parameters ☒ DMA Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

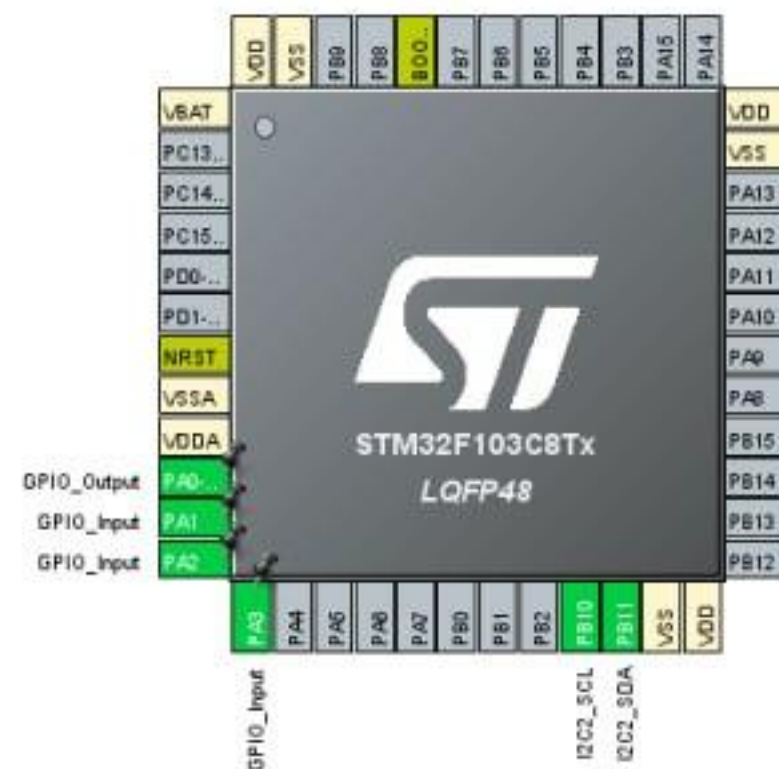

Tools



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Project

Project Settings

Project Name

My_Assignment

Project Location

C:\Users\Masr\Downloads\homework

Browse

Application Structure

Advanced

☐ Do not generate the main()

Toolchain Folder Location

C:\Users\Masr\Downloads\homework\My_Assignment\

Toolchain / IDE

STM32CubeIDE

☒ Generate Under Root

Code Generator

Linker Settings

Minimum Heap Size

0x200

Minimum Stack Size

0x400

Advanced Settings

Thread-safe Settings

Cortex-M3NS

☐ Enable multi-threaded support

Thread-safe Locking Strategy

Default - Mapping suitable strategy depending on RTOS selection

Mcu and Firmware Package

Mcu Reference

STM32F103C8Tx

Firmware Package Name and Version

STM32Cube FW_F1 V1.8.5

☐ Use latest available version☒ Use Default Firmware Location

Firmware Relative Path

C:/Users/Masr/STM32Cube/Repository/STM32Cube_FW_F1_V1.8.5

Browse