

PLAN FROM ABOVE · 1:4

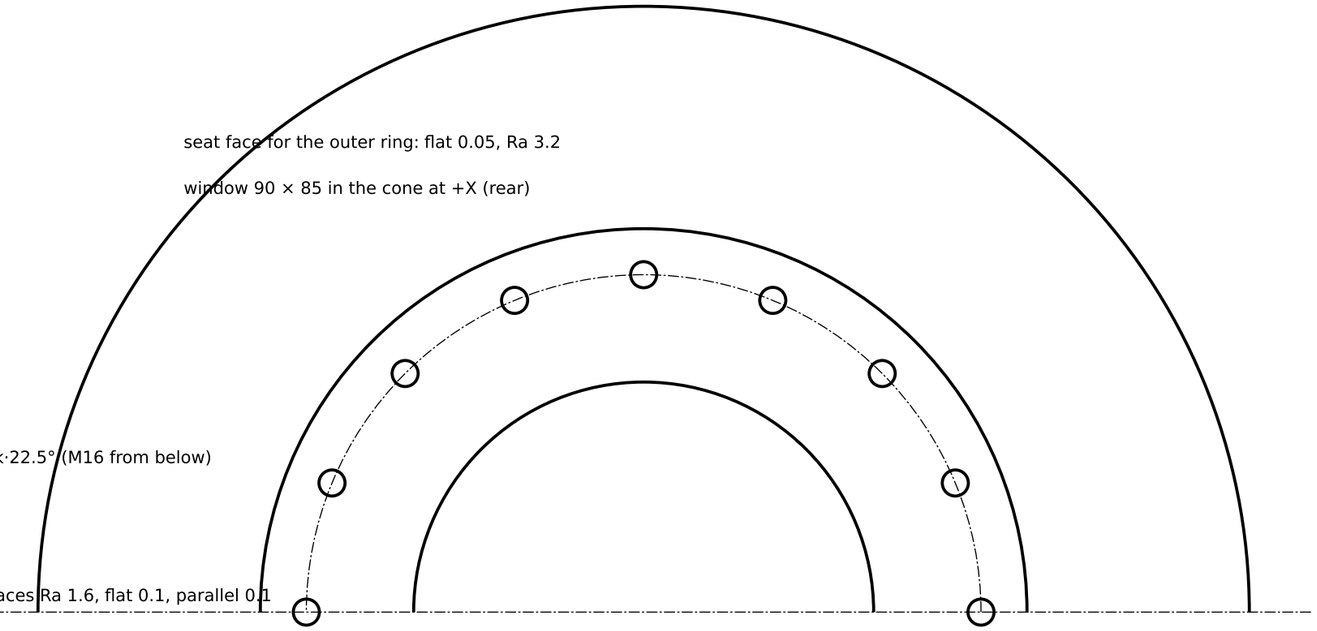

HALF SECTION (between gussets) · 1:4

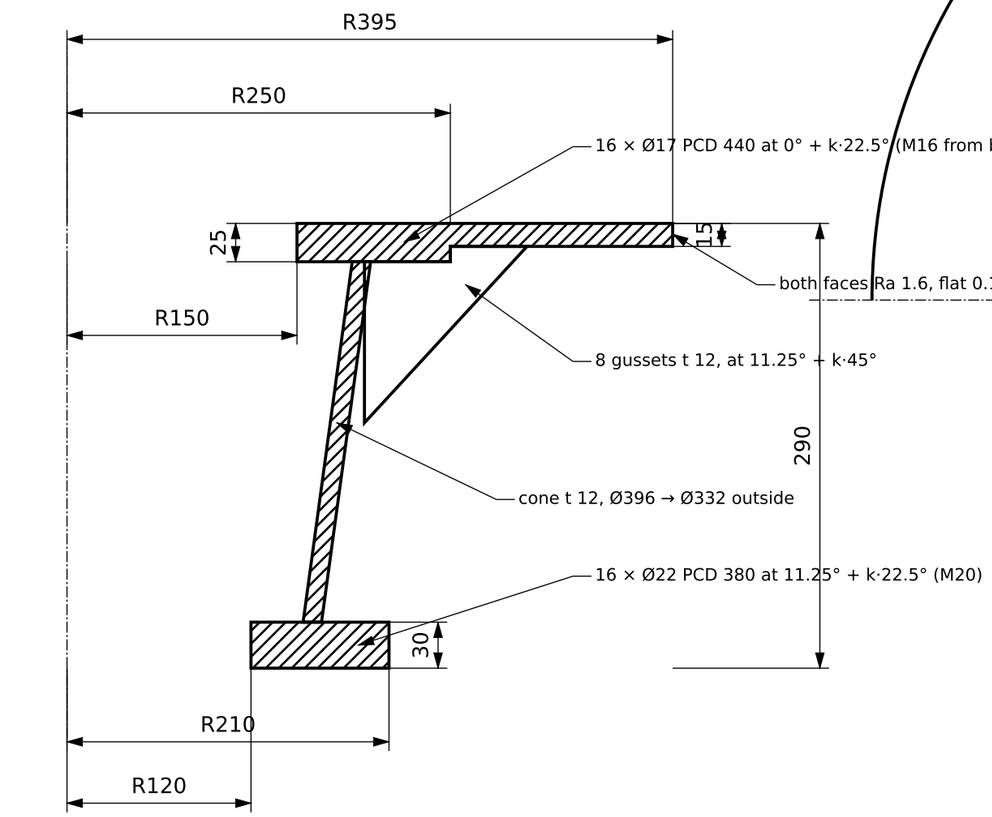

NOTES

1. Weld cone to seat plate and to flange with full-penetration welds (ISO 5817 B), gussets with 5 mm double fillets; stress relieve, then machine seat, track faces and flange in one set-up.
2. Seat and track are one machined plate: 25 mm blank, track turned to 15 mm (r 250 to 395). Track faces left bare under the pads; all other surfaces C5-VH coating (ISO 12944, zinc-rich primer).
3. Bolt loads at the SLM tilt moment 34.6 kNm: outer ring 19.1 kN per M16 (preload 90 kN), tower flange 32.0 kN per M20 (preload 110 kN).
4. Replaces the NP1-400 proposal of doc 16 (25 mm plate to Ø840, 143 kg): track moved in to r 395 and thinned to 15 mm because the pads only clamp 5.3 kN.
5. Gussets stay inside r 300 and below the track so the lower pad jaws (r ≥ 318) pass all the way round.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · YAW SYSTEM (DOC 25)

TOWER-TOP ADAPTER WITH FRICTION TRACK

DRAWING NO.	REV / DATE	SCALE (A3)
NY-400	A · 2026-11-05	1:4
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N plate and tube, weldment	107 kg (model)	Claude / not checked