SECTION IN THE RADIAL PLANE (engaged) · 1:1

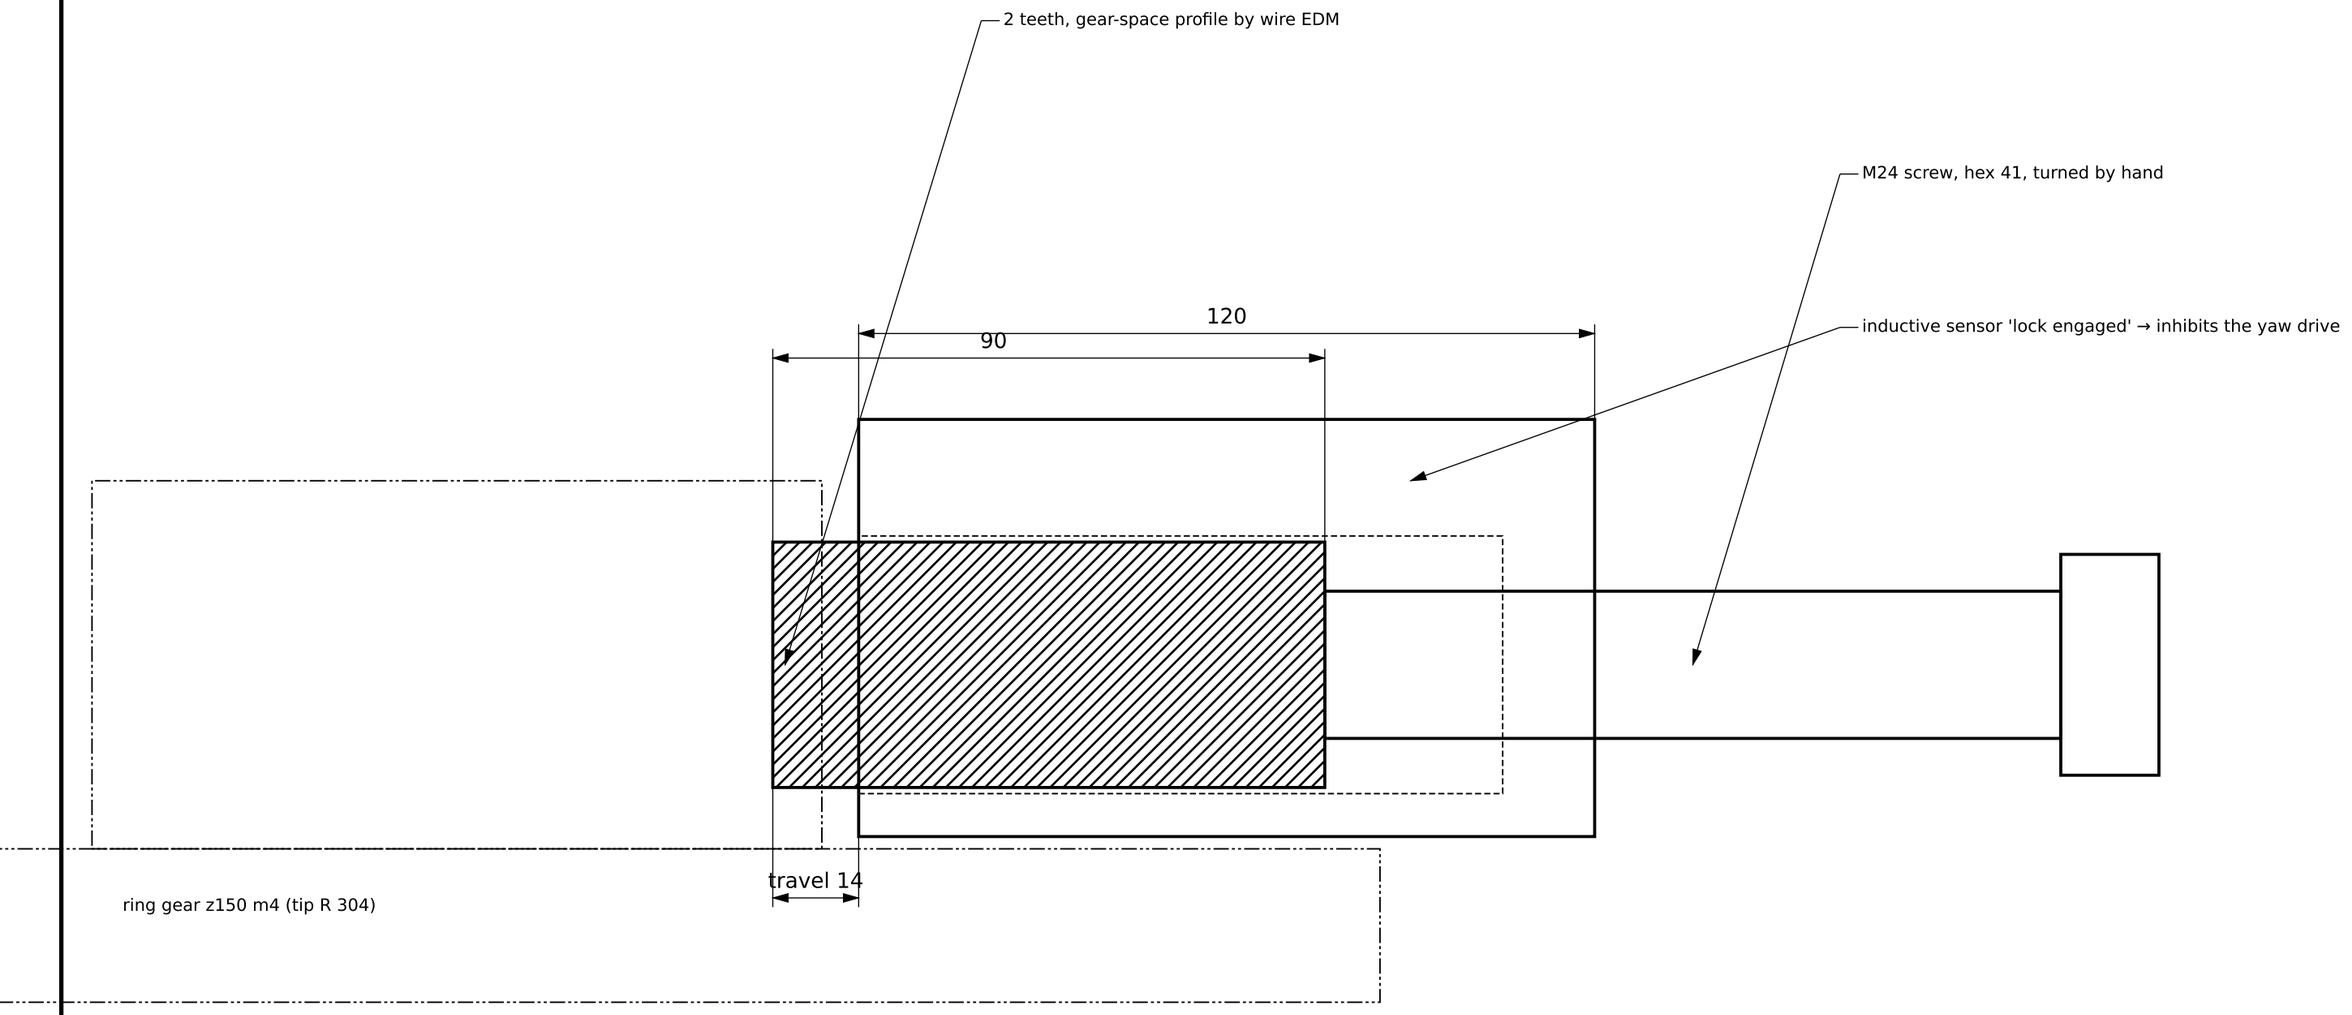

NOTES

1. Use: service only (yaw drives locked out). Turn the nacelle until a tooth space is opposite the block (encoder target), then screw the block in.
2. Strength: design yaw moment 8 kNm → 26.7 kN at the gear pitch radius on two teeth; tooth root shear and bending of the block S ≥ 3 (42CrMo4+QT, 900 MPa).
3. The housing bolts to the bedplate underside with 4 × M16 at the rear left corner (38.2°). Grease the slide; boot over the screw.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · YAW SYSTEM (DOC 25)

YAW LOCK (SERVICE)

DRAWING NO.	REV / DATE	SCALE (A3)
NY-430	A · 2026-11-05	1:1
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
housing S355J2+N, block 42CrMo4+QT	6.5 kg (model)	Claude / not checked