ELEVATION, VIEW TOWARDS THE SIDE PLATE · 1:3

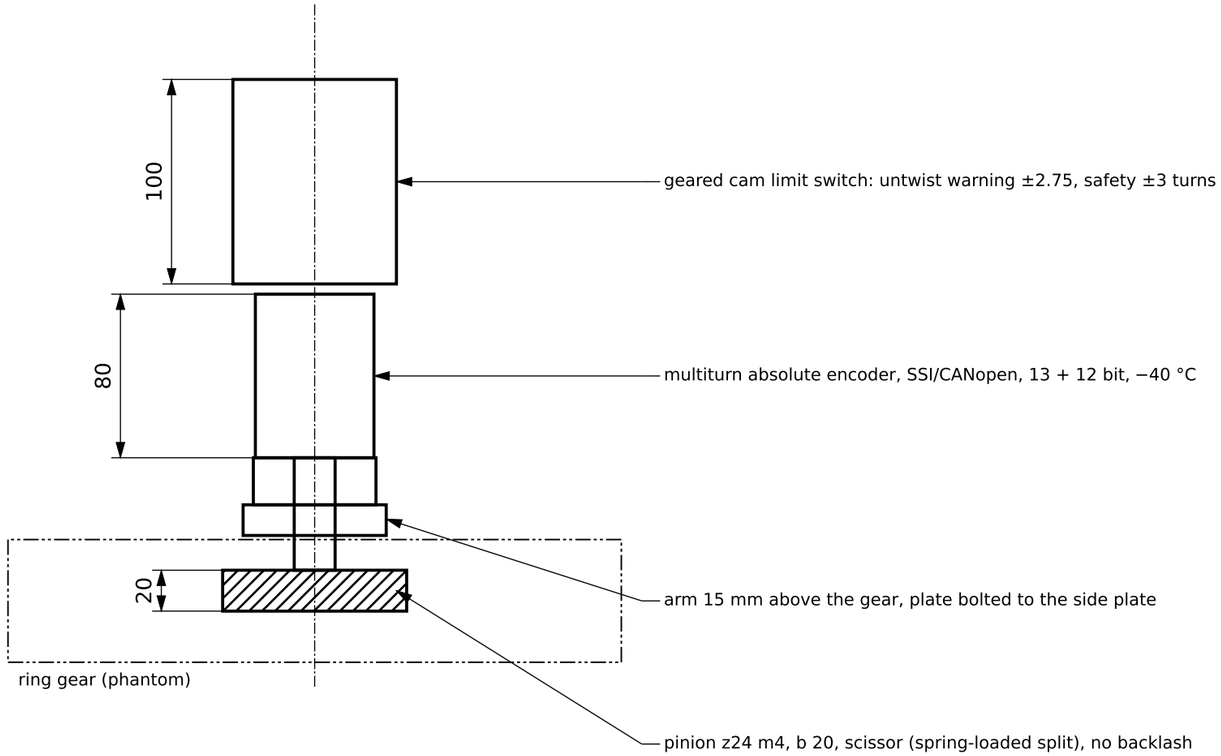

NOTES

1. Ratio ring/pinion 150/24 = 6.25: ±3 nacelle turns = ±18.75 turns at the switch.
2. Centre distance 348 mm at -68° (right side, behind the drive), outside the side plate so the instruments stand beside it.
3. Cam contacts are positively opened, wired into the hardwired safety chain (PL d). The encoder is only for control (yaw angle, twist count, untwist).
4. Plausibility: proximity switch at 0° on a ring tooth marker checks the encoder every revolution.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · YAW SYSTEM (DOC 25)

YAW ENCODER AND CAM LIMIT SWITCH UNIT

DRAWING NO.	REV / DATE	SCALE (A3)
NY-440	A · 2026-11-05	1:3
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
bracket S355J2+N, pinion 42CrMo4+QT	6.9 kg incl. instruments	Claude / not checked