

NOTES

1. DXF layer OUTLINE = cutting contour. Laser cut (P1), burr ≤ 0.02, heat zone ≤ 0.1; or progressive die (series).
2. Magnetic contour identical to the doc 14 one-piece lamination; joints on the slot centre lines in the yoke (8.000° pitch).
3. Stack: 205 sheets, 74.0 ±0.1 (sheets counted, height measured per segment), bonded in fixture NP1-T03 at 1.0 to 1.5 MPa, varnish cure per supplier.
4. Checks per stack: tip radius R299.00 ±0.02 on gauge, foot width 14.00 −0.01/−0.03, slot opening edges straight 0.05 over 74; Franklin test ≥ 10 Ω·cm².
5. Do not machine tooth tips after stacking. 45 + 3 spare segments per stator; all identical.

SEGMENT (2:1), radial direction up

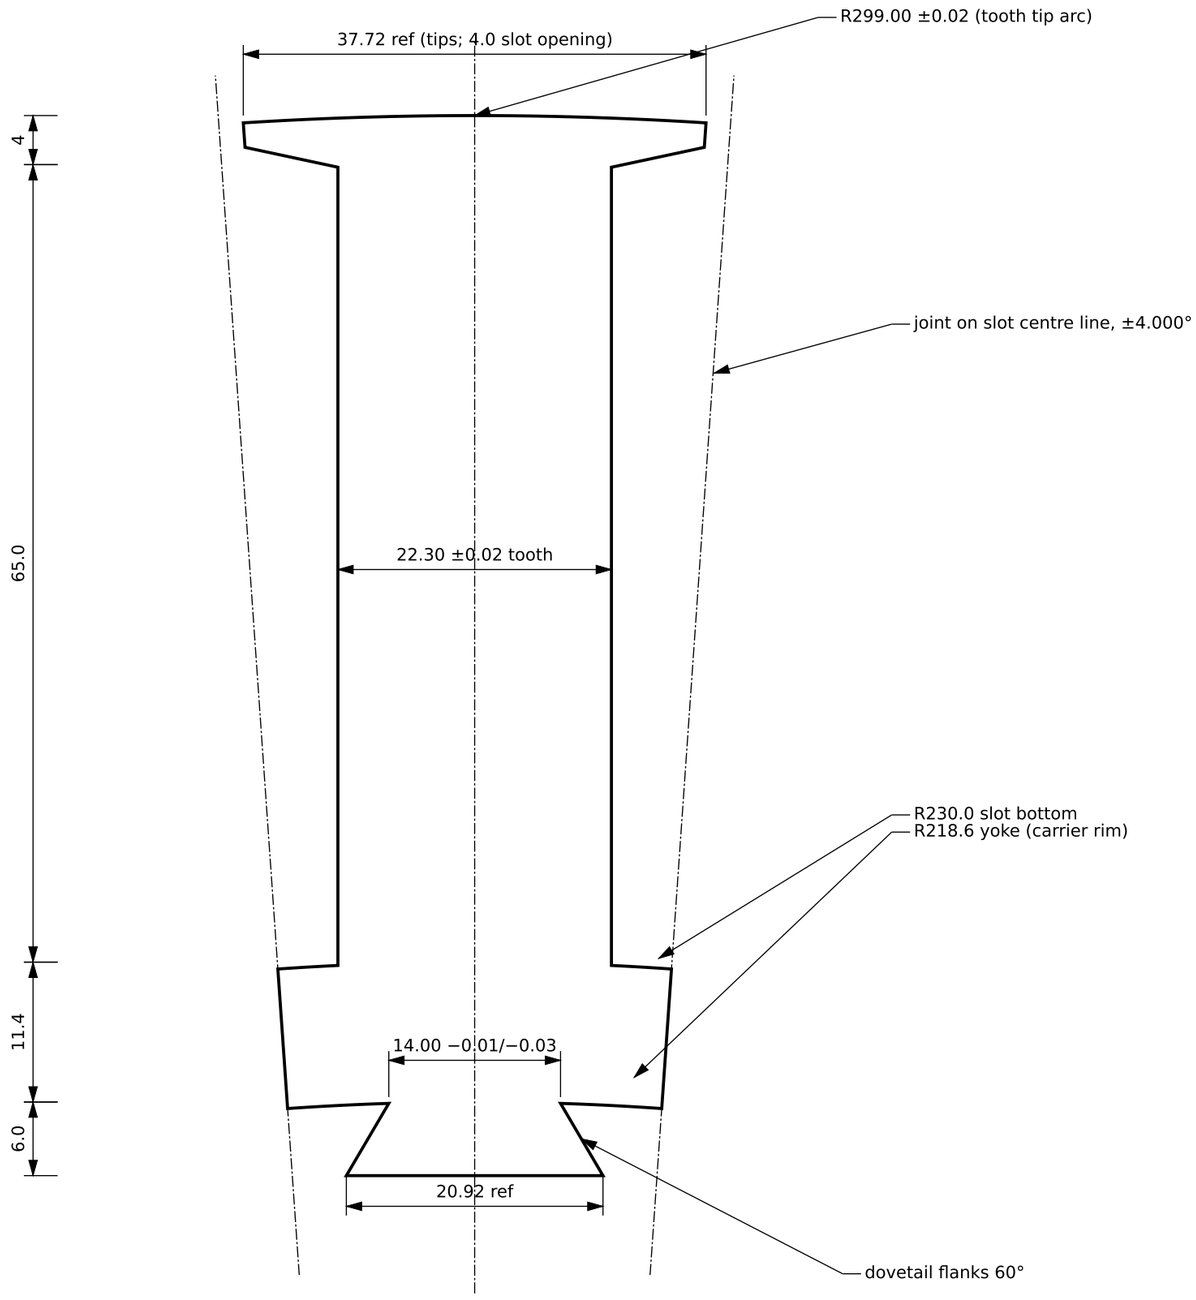

3 OF 45 SEGMENTS (1:2)

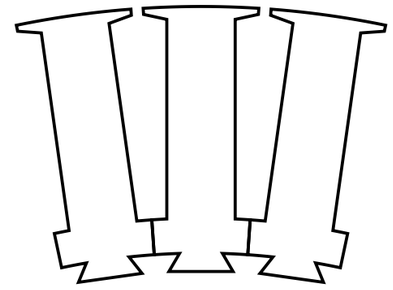

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

STATOR TOOTH SEGMENT LAMINATION (45 + 3 PER STATOR)

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-201C	C · 2026-11-05	2:1
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
M270-35A, 0.35 mm, self-bonding varnish	1.07 kg per stack	Claude / not checked