VIEW (1:4), front ring; rear ring mirrored

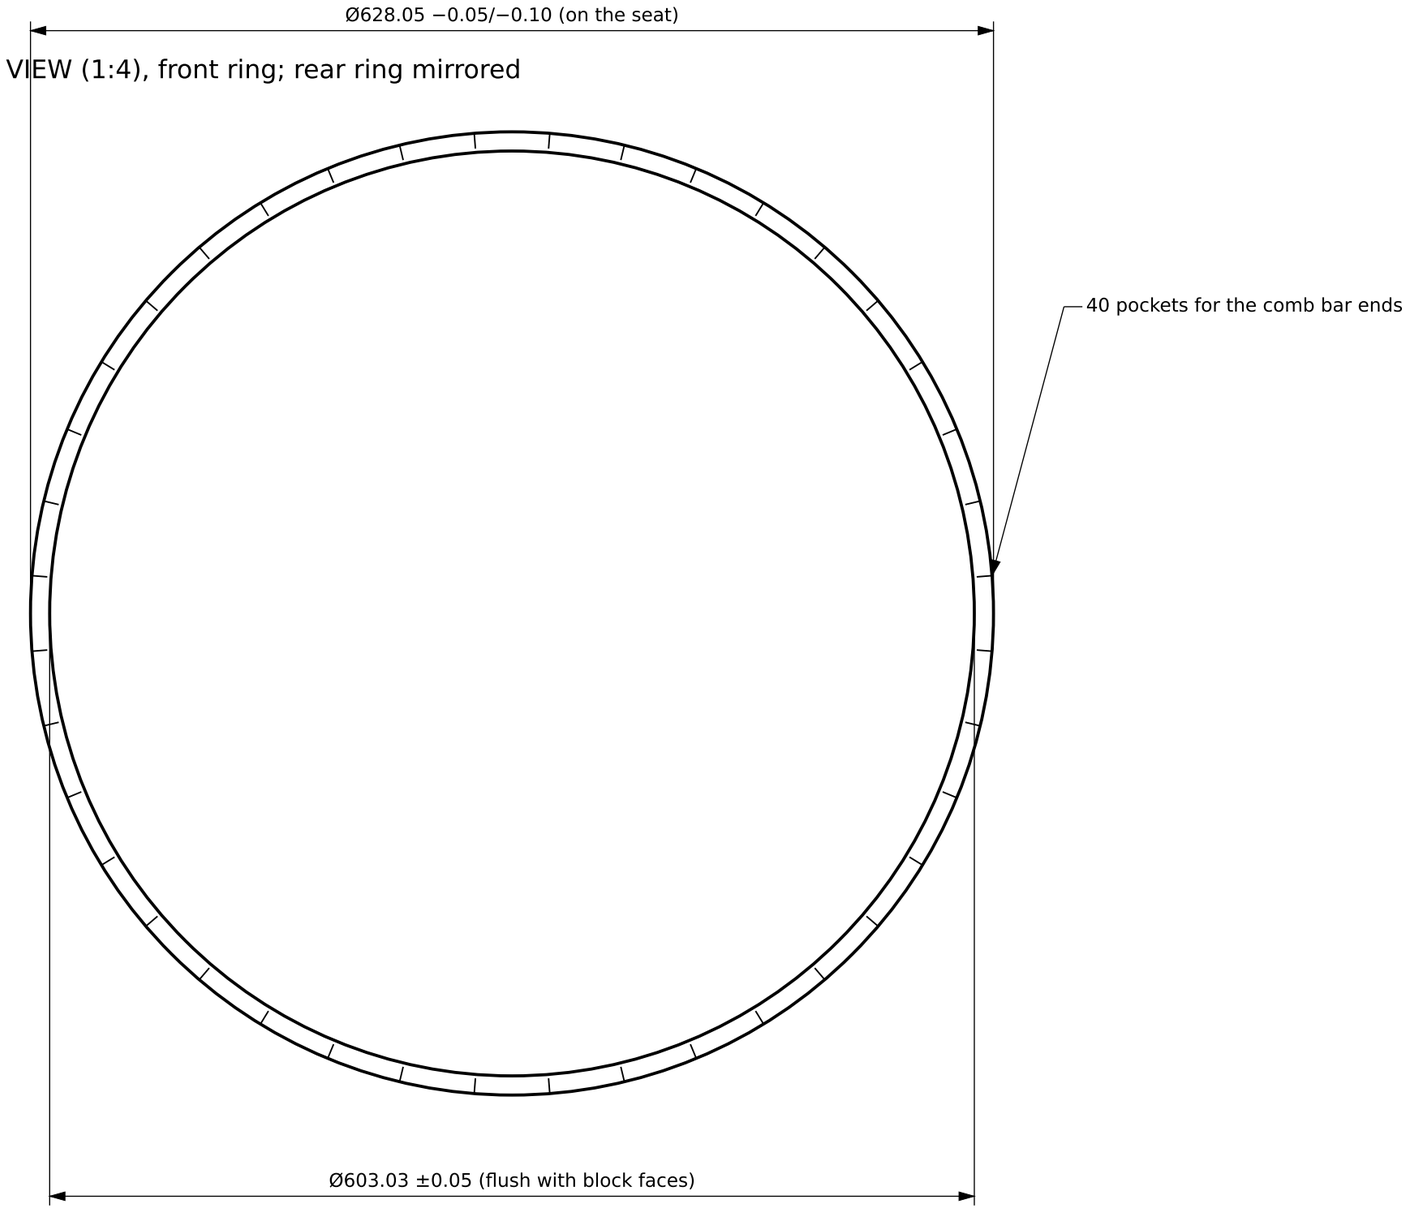

SECTION (4:1)

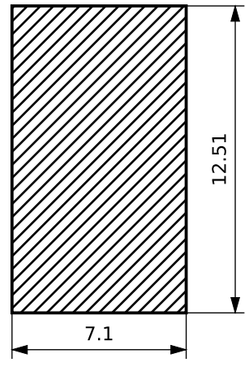

NOTES

1. Front ring at x 335 to 342.1, rear ring at x 417.9 to 425 (both 7.1 wide). They close the magnet pack and hold the comb bar ends.
2. Pockets: 19.11 wide (seat side), 10 deep radially, 4 deep axially, on the gap centre lines (4.5° + n × 9°), front ring rotated −0.40°, rear ring +0.40° (row skew).
3. May be made in 4 bonded arcs if no G11 tube of this size is available; joints on pocket centre lines.
4. Bonded to the seat with the magnet epoxy, then covered by the moulded glass sleeve.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

MAGNET END RINGS, FRONT AND REAR

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-222C	C · 2026-11-05	1:4 / 4:1
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
G11 glass-epoxy, machined from tube or segments	≈ 0.12 kg each	Claude / not checked