

POLE SECTION (3:1), centre line = pole N1

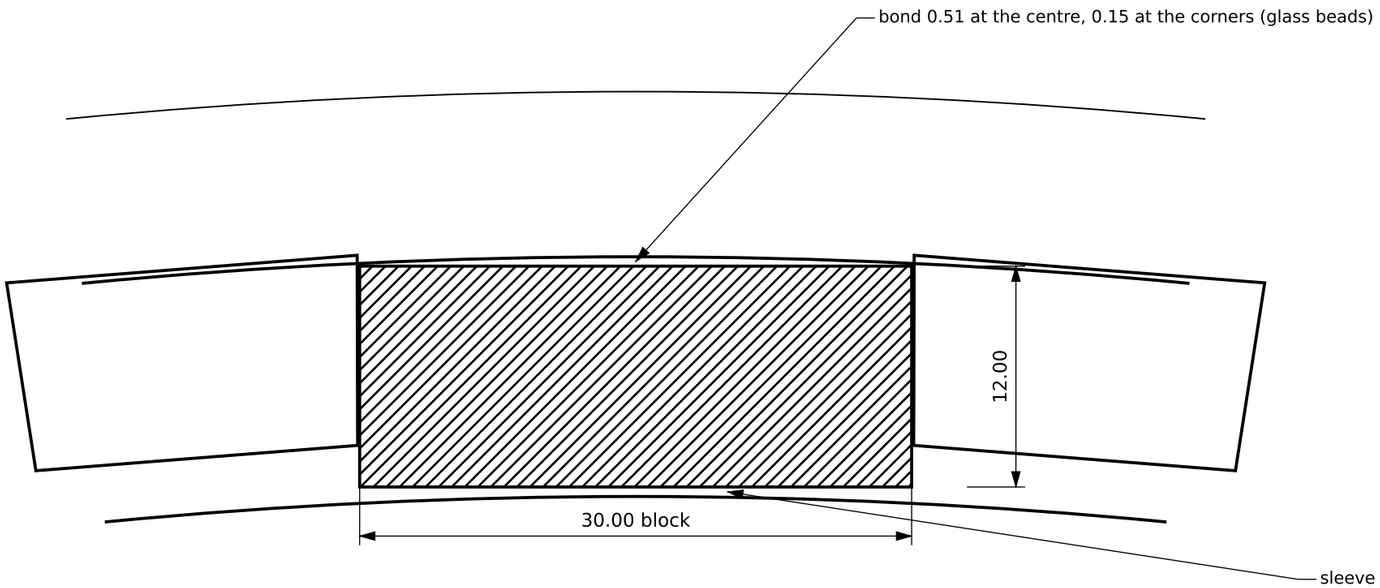

LAYOUT, 3 POLES UNROLLED (1:1), front row left

rows offset −0.4, −0.2, 0, +0.2, +0.4° (front → rear)

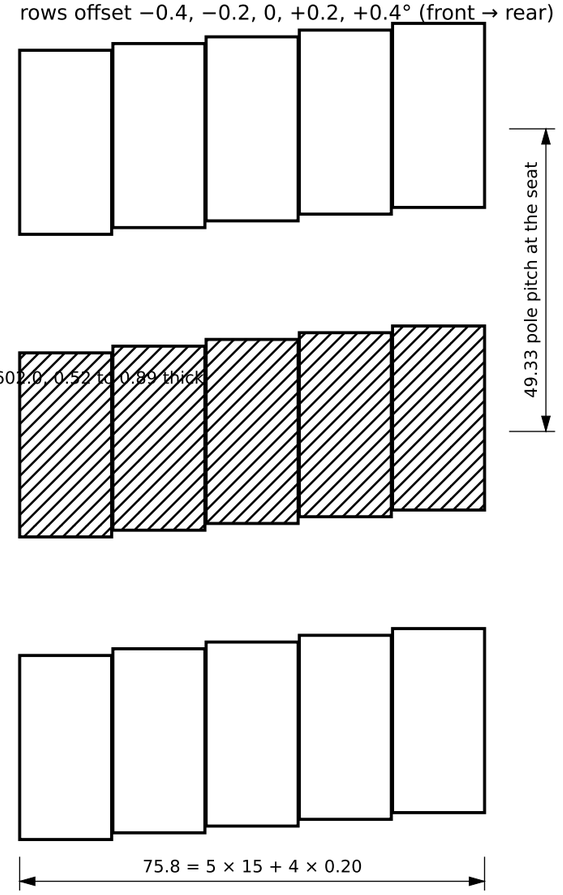

NOTES

1. Bond: two-component toughened epoxy, RT cure, 80 °C post-cure, with 0.15 glass beads (doc 18 §4.2). Blocks placed with jig NP1-T02 against the comb bar faces; all N poles first, then S.
2. Sequence per pole: comb bars and end rings bonded and cured first; blocks row by row from the front; check each row against the template (skew 0.20 ±0.02° per row).
3. Pole map NP1-T10 after cure: every pole centre within ±0.05° of nominal, flux per pole within ±1.5 %.
4. Sleeve: E-glass/epoxy moulded on the Al mandrel NP1-T06 located on both cup seats; bore Ø602.0 ±0.03, thickness 0.52 at the block centres, 0.89 at the edges; covers the end rings.
5. Q1 check (doc 18 §10): sleeve thickness by section 0.45 to 0.95; air gap feeler check 2.0 ±0.1 all round after joining.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

ROTOR MAGNET PACK: POLE SECTION, LAYOUT AND SLEEVE

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-223C	C · 2026-11-05	3:1 / 1:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
assembly	8.2 kg magnets	Claude / not checked