NP1-102 REAR SEAL SLEEVE (Rev B)

NP1-101 SECTION

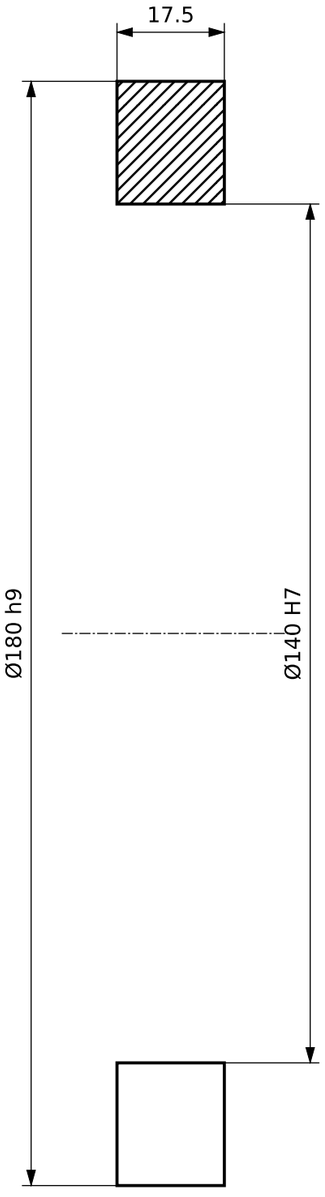

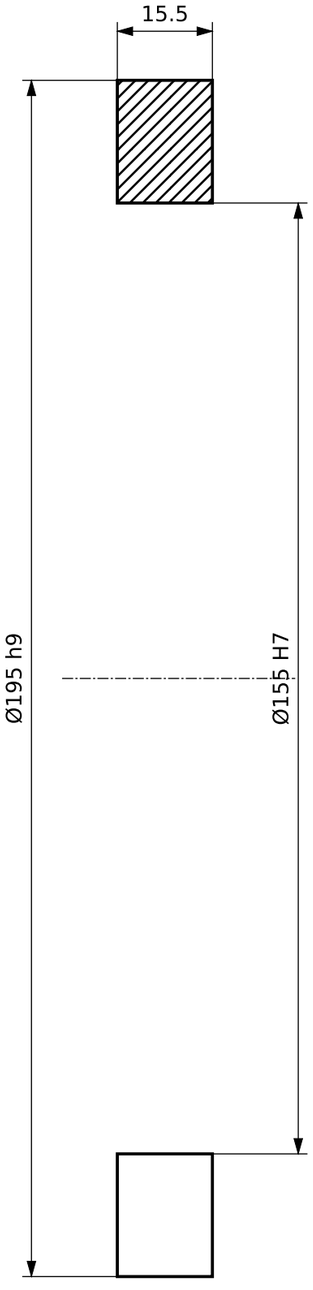

NOTES

1. Faces parallel within 0.005 (it sets the bearing preload path).
2. NP1-102: same material and hardening as NP1-101; O-ring 155 × 3 in a bore groove (static seal); slides onto the Ø155 shoulder before the rear cone, front face against the cone back face.
3. Rev B: OD 160 → 180 so the front seal cover clears the KMT 27 nut (doc 17).
4. Ø180 surface induction hardened 55 to 60 HRC, depth 1 mm, ground Ra 0.2 to 0.4, no lead.
5. Bore chamfer 1.5×30° on the cone side.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

FRONT SPACER + REAR SEAL SLEEVE NP1-102

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-101	B · 2026-11-03	1:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
42CrMo4+QT, surface induction hardened	1.4 kg	Claude / not checked