LOCK PIN

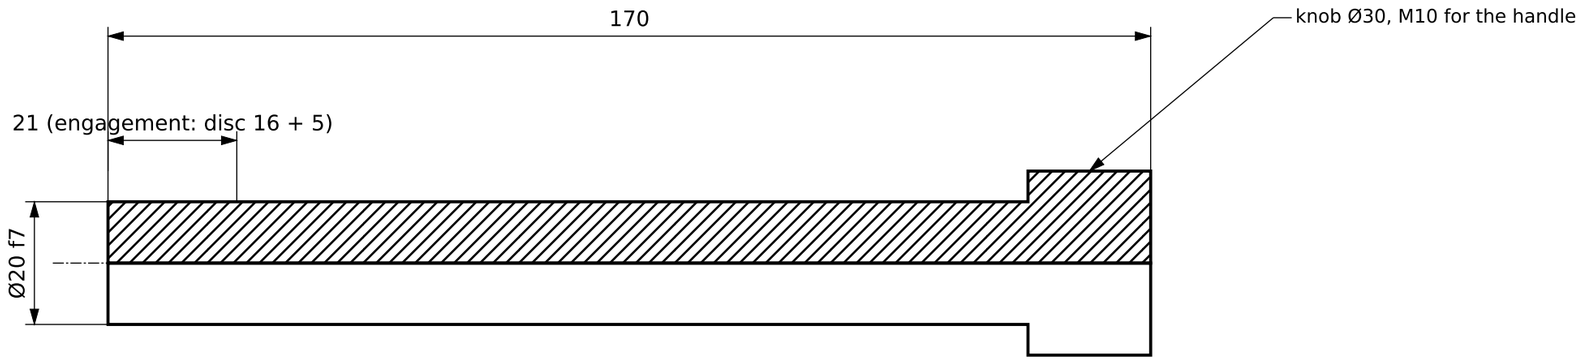

NOTES

1. Rev B (doc 17): pin Ø20 at the top (12 o'clock) on PCD 740, entering the disc from behind; holder NP1-321 sits on the top edge of the bedplate front plate and also carries the two overspeed sensors. Shear at 8.7 kNm: 23.5 kN, τ = 75 MPa (allowable 300); bearing on the 16 mm disc 73 MPa.
2. Stroke 40: retracted, the nose is 19 mm behind the disc and clear of the Ø710 ring and the rear cover (r ≥ 360).
3. Holder has a proximity switch that reports 'pin engaged' to the safety chain (no rotor release while engaged, doc 11).
4. Insert only at standstill with the brake applied.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

ROTOR LOCK PIN AND HOLDER

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-320	B · 2026-11-03	1:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
pin 42CrMo4+QT; holder S355J2	≈ 4 kg	Claude / not checked