GUIDE TUBE ON SPINDLE NOSE

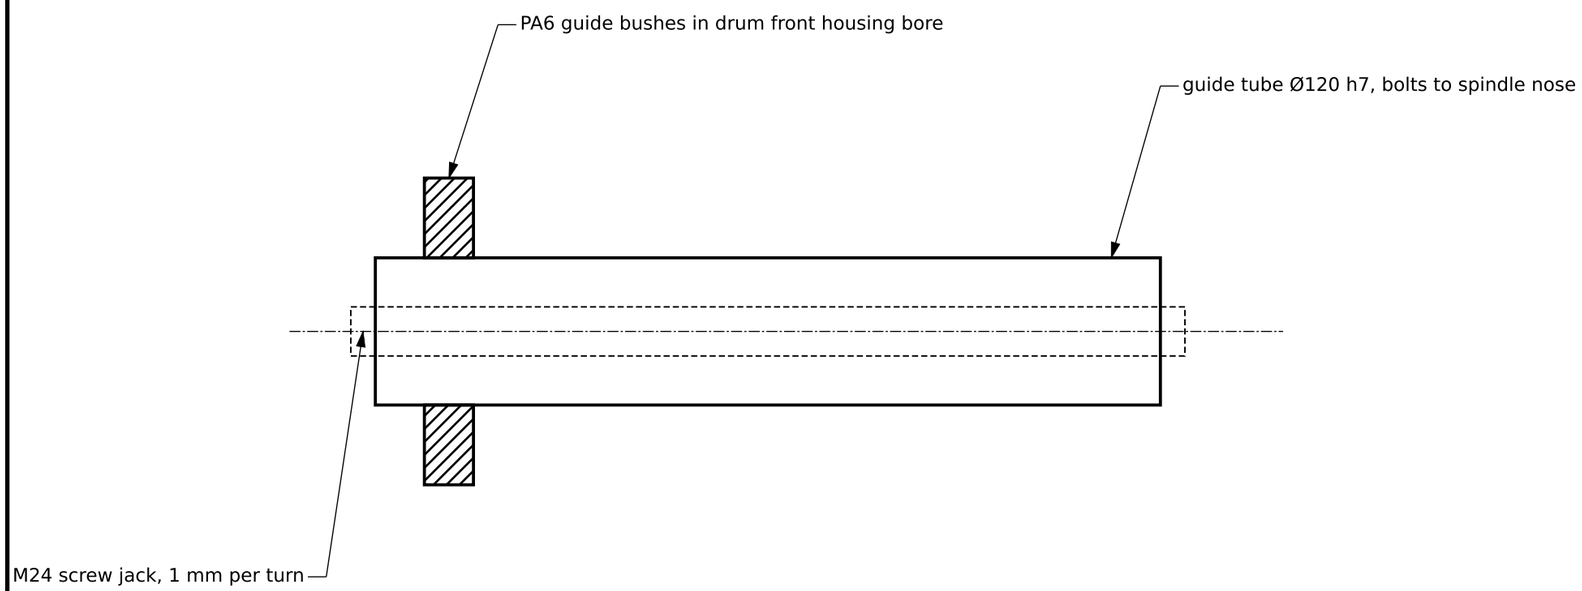

NOTES

1. Radial magnetic pull with the drum off-centre is ≈ 1.9 kN per mm of eccentricity (doc 07) and grows quickly; never let the magnet ring approach the stator by hand.
2. Procedure: spindle vertical, nose up; guide tube bolted to the nose; drum hung from the crane, centred by two PA6 bushes on the tube before the magnets reach the stator; lowered by the screw jack until the rear cup reaches the rear cone.
3. Gap check during lowering: 4 non-magnetic feelers (G10, 1.5 mm) in the gap at 90°.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

DRUM ASSEMBLY GUIDE (MAGNET SAFETY TOOL)

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-T01	B · 2026-11-03	1:5
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
S355 / PA6 bushes	≈ 30 kg	Claude / not checked