

SECTION A-A

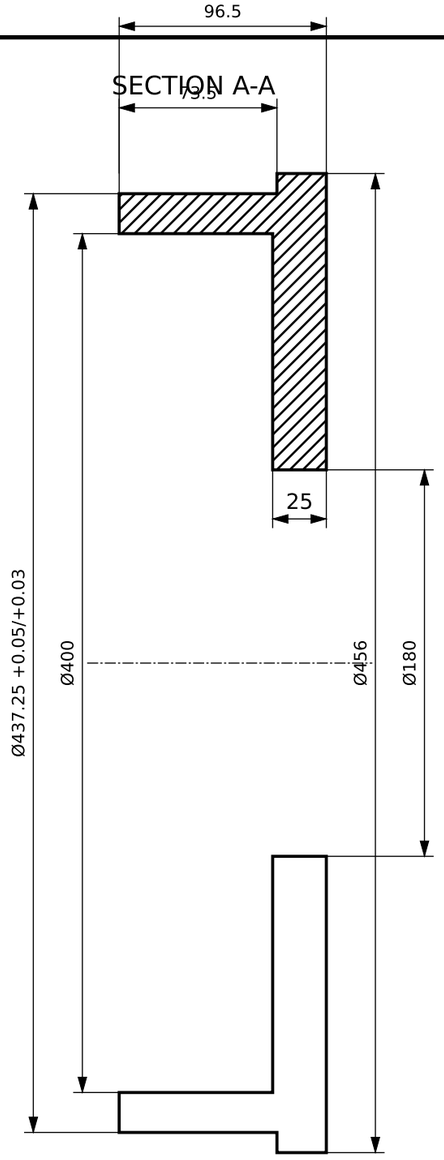

VIEW B (from front)

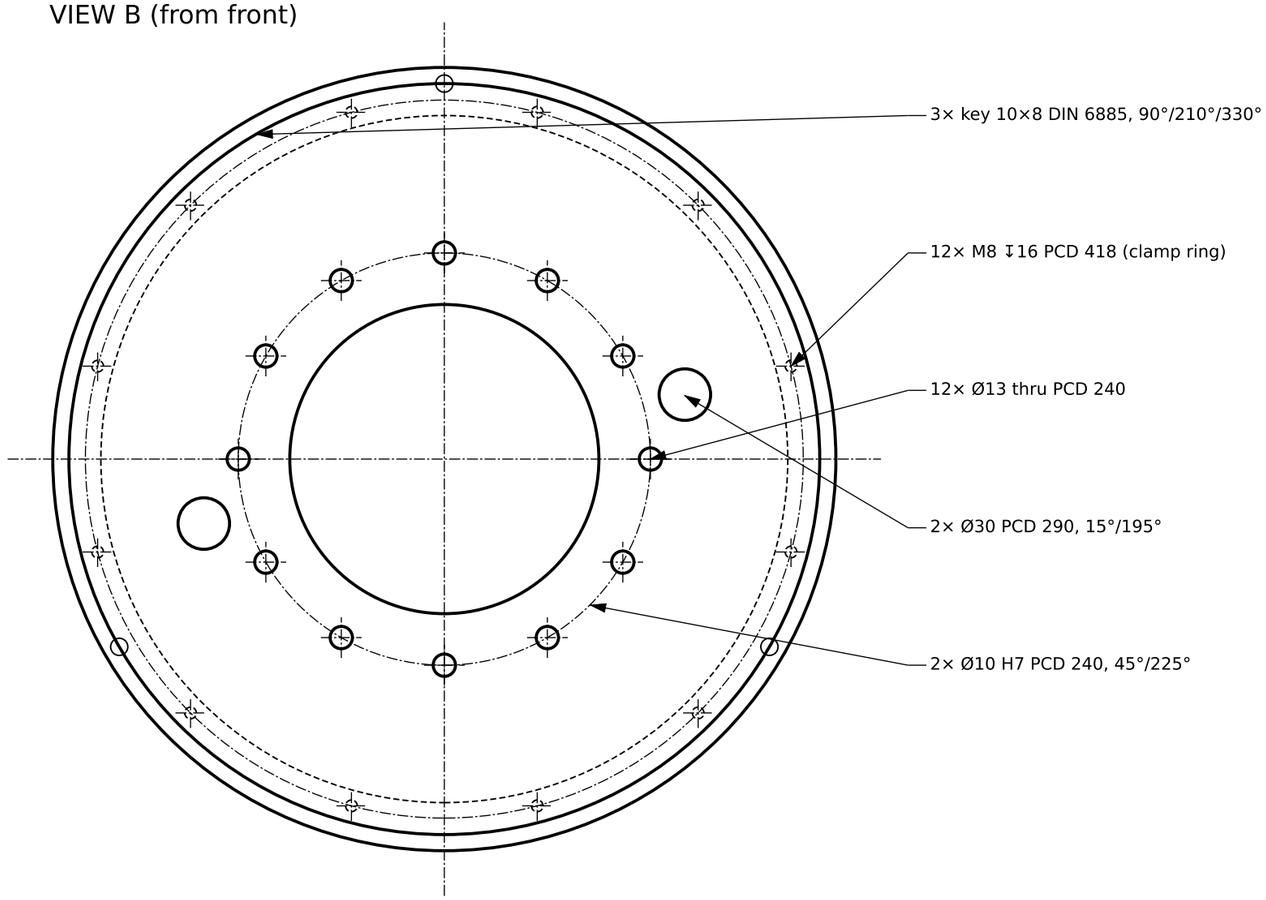

NOTES

1. Steel, not aluminium, is used for P1: steel matches the lamination expansion, so the stack stays tight and centred from −40 °C to +130 °C. An aluminium carrier loses ≈ 0.6 mm of fit on Ø437 at −40 °C (doc 14, 4.2).
2. Stack seat Ø437.25 +0.05/+0.03 against lamination Ø437.20 +0.03/0: interference 0 to 0.05; assemble by cooling the carrier (dry ice / LN2) and sliding the bonded stack on against the rear stop.
3. Run-out of the stack seat and of the rear stop face to the bolting face and Ø180 spigot ≤ 0.02. Bolting face flatness 0.02.
4. Rim front face sits 0.5 below the stack face so the clamp ring NP1-202 clamps the stack (12× M8 A4-80, 20 Nm).
5. Bolt to the spindle flange with 12× M12 10.9 + hardened washers, 110 Nm (μ 0.12), with 2 fitted dowels; thermal interface: Al-filled paste, 0.05 mm, on the full bolting face.
6. Machine after stress relief (580 to 620 °C, 2 h). Paint: none on the stack seat and bolting face; elsewhere epoxy primer 60 μm.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

STATOR CARRIER

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-200	B · 2026-11-03	1:2.86 / 1:3.6
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
S355J2+N plate or ring forging, stress relieved	40.6 kg	Claude / not checked