FRONT COVER: lip seal 180×200×10 HNBR + V-ring

6× Ø9 PCD 225; seal bore H8, Ra 1.6

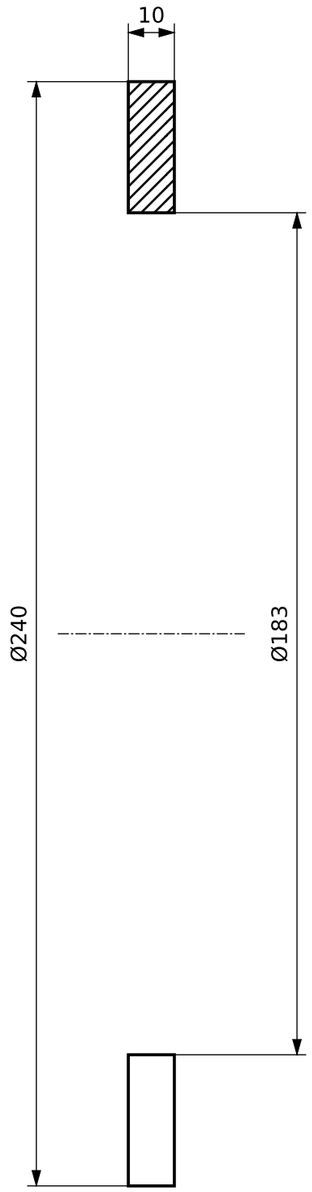


REAR COVER: lip seal 195×220×12 HNBR on NP1-102

6× Ø9 PCD 225; seal bore H8, Ra 1.6

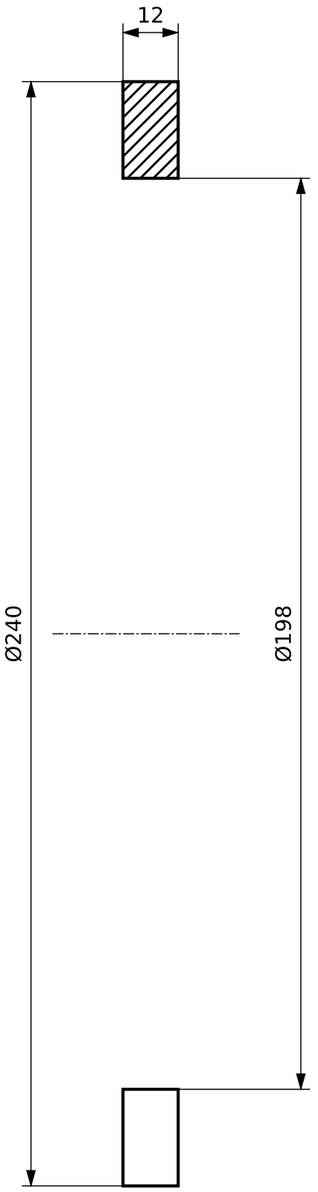


**NOTES**

1. Rev B (doc 17): both bores are larger than every part they pass. Front cover goes on after the KMT 27 nut and the rolling-torque check; rear cover is bolted to the drum before the drum goes over the fitted rear cone (Ø191 envelope) onto the sleeve NP1-102.
2. Seal lips face the bearing (grease retention); V-ring outside on the front cover runs against the spacer face.
3. Purge: grease exits under the lip; collect with absorbent ring at service.
4. Pilot on the housing bore Ø210, 2 mm deep (not shown), for concentric seals.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

**12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1**

# MAIN BEARING SEAL COVERS (FRONT / REAR)

| DRAWING NO. | REV / DATE | SCALE (A3) |
|---|---|---|
| NP1-211 | B · 2026-11-03 | 1:1 |
| MATERIAL | MASS (CALC.) | DRAWN / CHECKED |
| S355J2 | 2.8 kg | Claude / not checked |