
VIEW · Rev B · thickness 16 · slides on from the front over the Ø646 drum shell

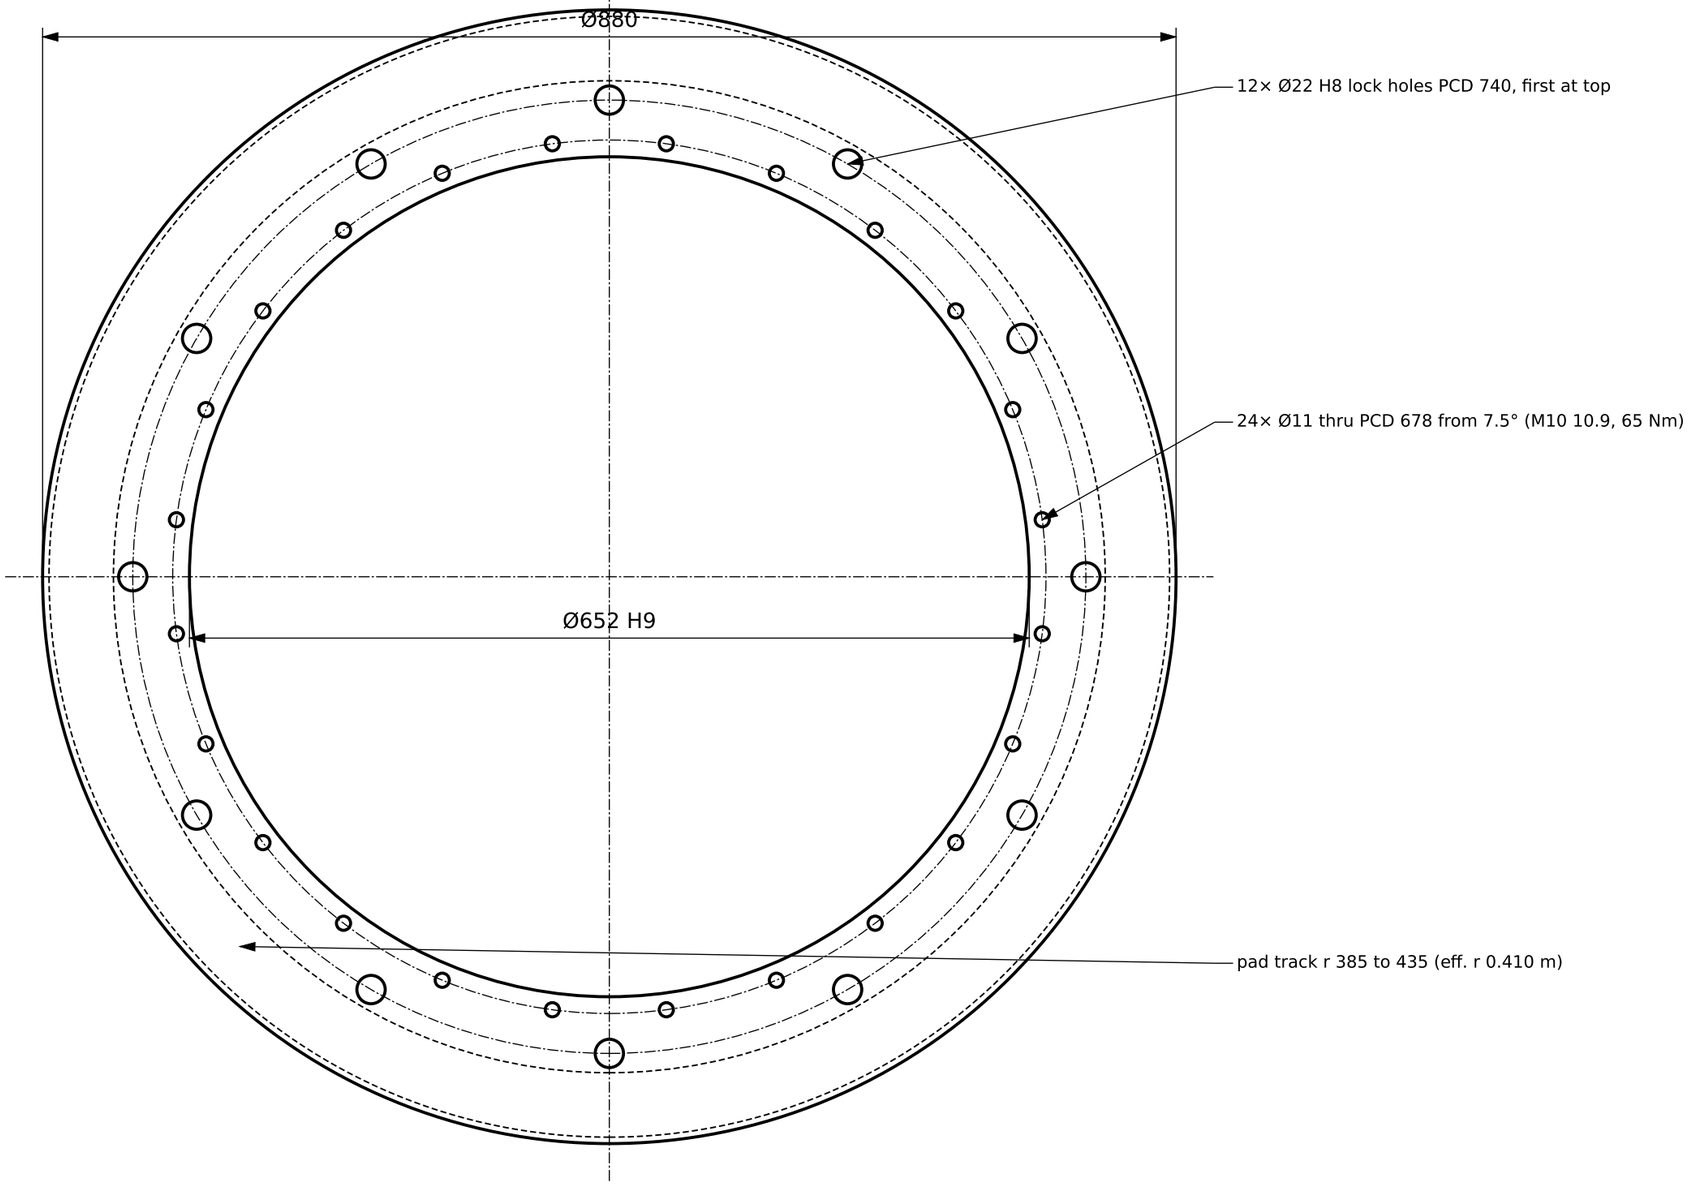

NOTES

1. Faces ground parallel 0.03, flatness 0.05, Ra 1.6. Axial run-out mounted on the drum ≤ 0.10.
2. Two spring-applied hydraulically released calipers (bought), at 90° and 270° (horizontal), each ≥ 13.3 kN clamp force on 16 mm disc; brake torque 8.7 kNm at μ 0.4.
3. Rev B (doc 17): bore Ø640 → Ø652 (fits over the drum shell from the front), OD Ø800 → Ø880 (pad track outside the Ø710 flange ring, room for the caliper behind the disc), lock holes moved here from the ring.
4. Corrosion: zinc-flake coating outside the pad track; pad track left bare (it is cleaned by the weekly brake test, doc 11).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

BRAKE DISC AND ROTOR LOCK HOLES

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-230	B · 2026-11-03	1:4.8
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
C45E+N (or S355J2+N), 16 mm	34.5 kg	Claude / not checked