

SIDE VIEW (Z = 0 section), phantom: drivetrain and yaw bearing

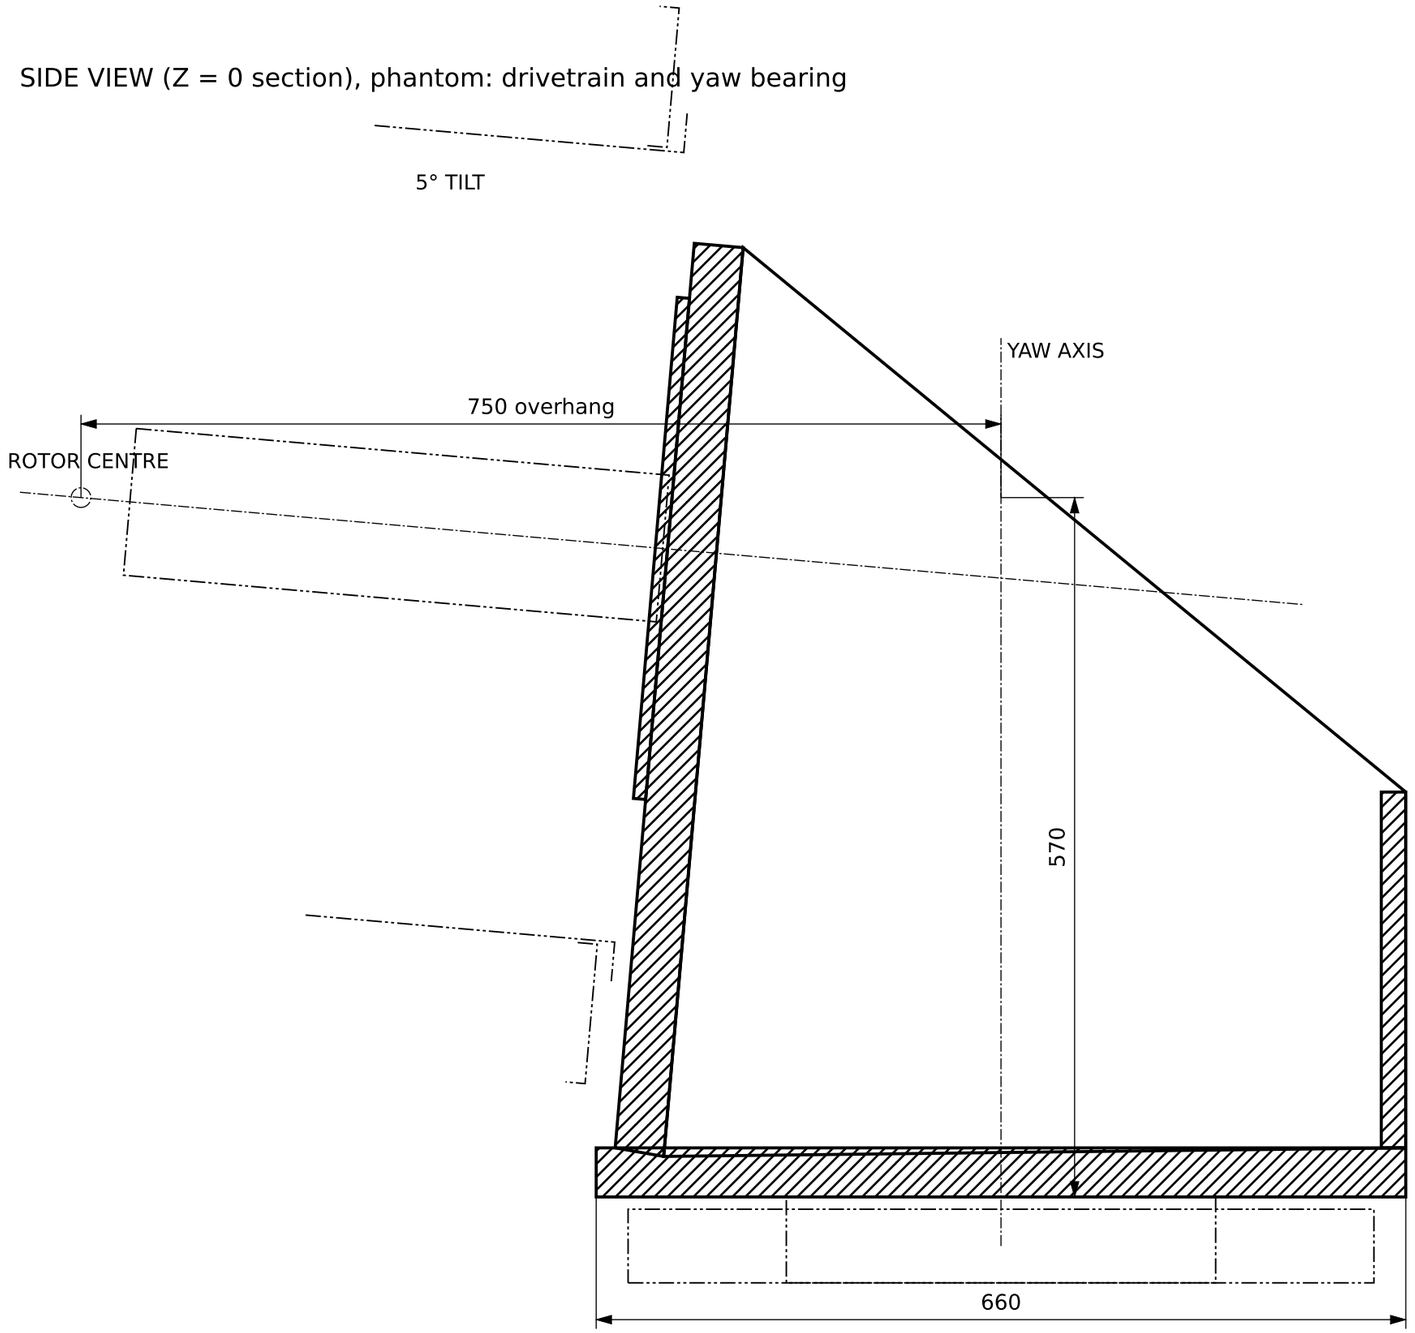


FRONT PLATE (40), view along spindle axis

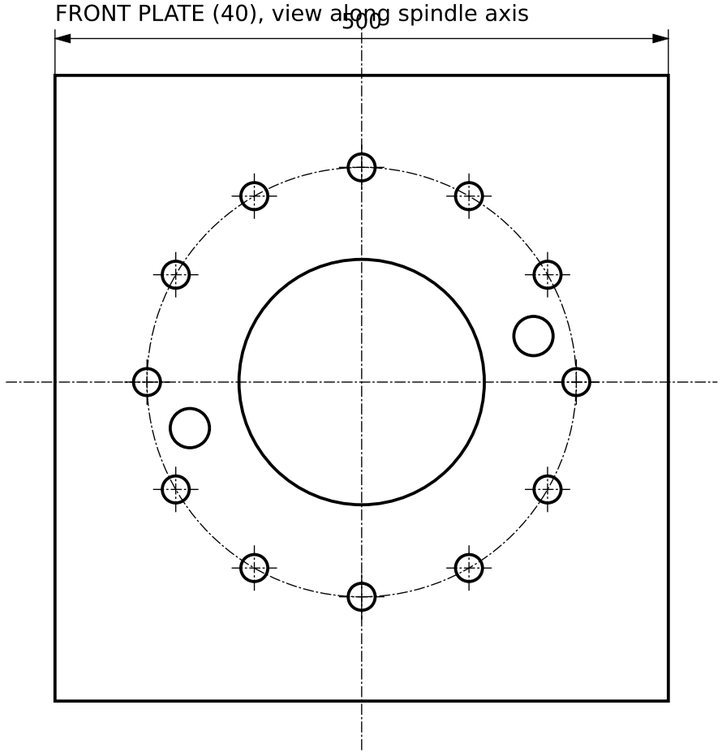


**NOTES**

1. P1 bedplate is a stress-relieved S355J2+N weldment instead of the EN-GJS-400-18U-LT casting (doc 07): no pattern lead time, same interfaces. The cast version follows after P1 strain-gauge data.
2. Front plate 40, perpendicular to the spindle axis, front face x 480 with a machined Ø410 × 10 pad (face x 470 = spindle flange face; Rev B, the rotating rear cover runs 5 mm from the plate outside the pad): Ø200 H7 spigot bore, 12× Ø22 PCD 350 (M20 10.9 from inside, 540 Nm at μ 0.12), 2× Ø32 cable holes PCD 290. Face flatness 0.03, square to the yaw flange within 0.05/400 at 5.00° ±0.05° tilt.
3. Bottom plate 40 (yaw flange): Ø220 bore, 16× Ø18 PCD 300 for the yaw bearing inner ring (M16 10.9). Flatness 0.05 (slewing ring requirement, confirm with supplier).
4. Side plates 20 (Z = ±240), rear plate 20, internal gusset under the front plate; top is open for access in P1 (bolted lid).
5. Brake caliper brackets NP1-310 bolt to side plates at the spindle axis height; yaw drive and yaw brake brackets bolt to the bottom plate (positions after yaw supplier drawing).
6. Welds ISO 5817 B, 100 % MT; stress relieve; machine front plate and bottom plate in one set-up on a 5° fixture.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

**12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1**

# BEDPLATE WELDMENT (P1 FABRICATED VERSION)

| DRAWING NO. | REV / DATE | SCALE (A3) |
|---|---|---|
| NP1-300 | B · 2026-11-03 | 1:5 |
| **MATERIAL** | **MASS (CALC.)** | **DRAWN / CHECKED** |
| S355J2+N plates, stress relieved, machined | ≈ 150 kg | Claude / not checked |