

VIEW FROM UPWIND · rotation clockwise



AXONOMETRIC VIEW (not to scale)

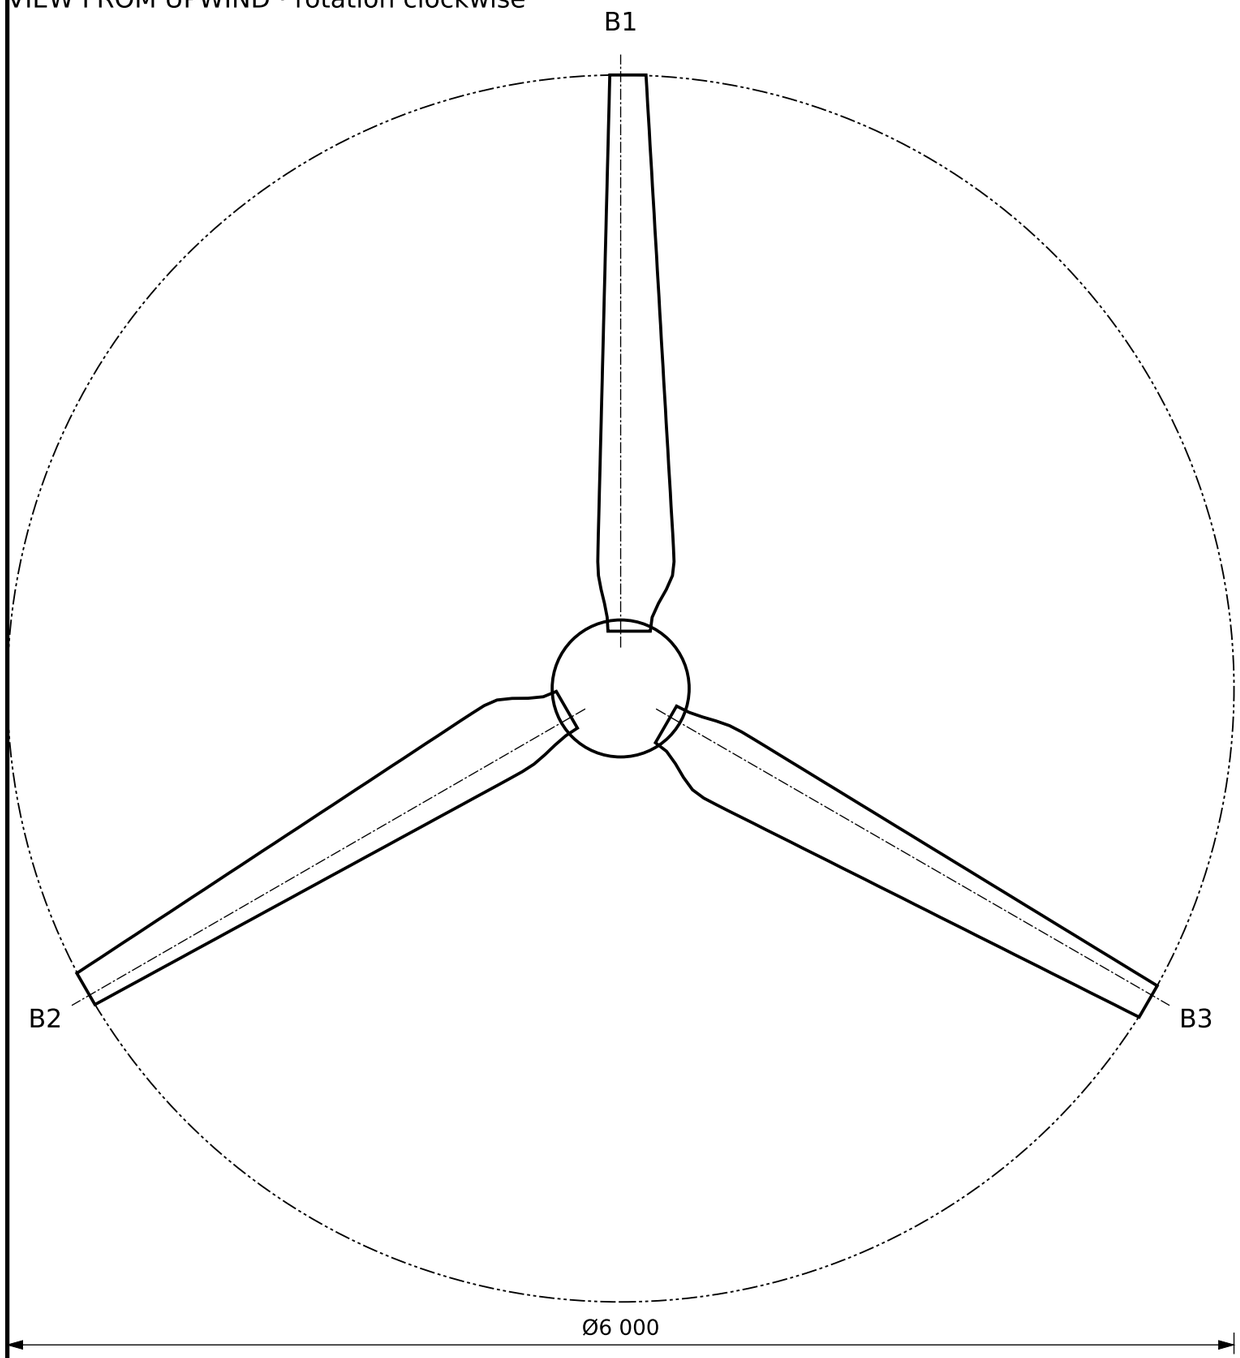

SIDE VIEW, upper blade

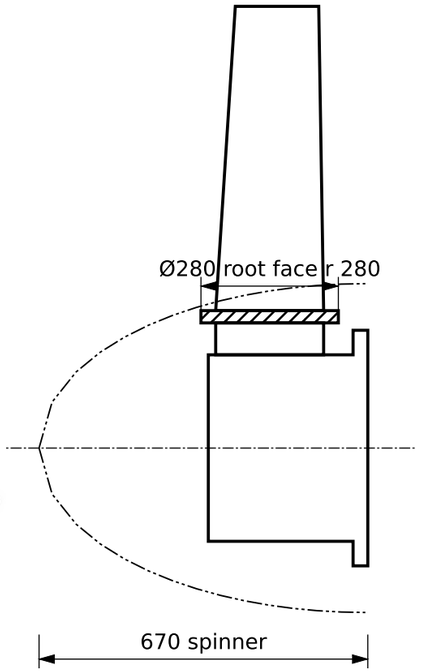

Item	Value
Blade setting	−2.0° ± 0.1° at r = 2 000 (gauge NS6-135)
Blade set	static moments equal within 0.5 %
Track	tip track within ± 15 mm (string / laser)
Rotor balance	residual ≤ 0.2 kg·m (doc 09 R6.6)
Root bolts	30 × M12 10.9, 95 Nm + 90° (NS6-900)
Hub bolts	12 × M16 10.9 to the drum, 250 Nm

NOTES

1. Blades are numbered B1–B3 at the factory with their static moment; mount B1 on the arm marked 1 (lock-pin side).
2. Set pitch with the blade on the hub, bolts finger tight, gauge on the r = 2 000 station; tighten in a star pattern; re-check after 50 h of operation.
3. Balance the rotor on the turbine with the doc 09 procedure (one trial mass on the spinner brackets).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

ROTOR ASSEMBLY · HUB, BLADES, SPINNER

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-020	B · 2026-11-06	1:30
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
see BOM	≈ 162 kg (rotor + hub + spinner)	Claude / not checked