
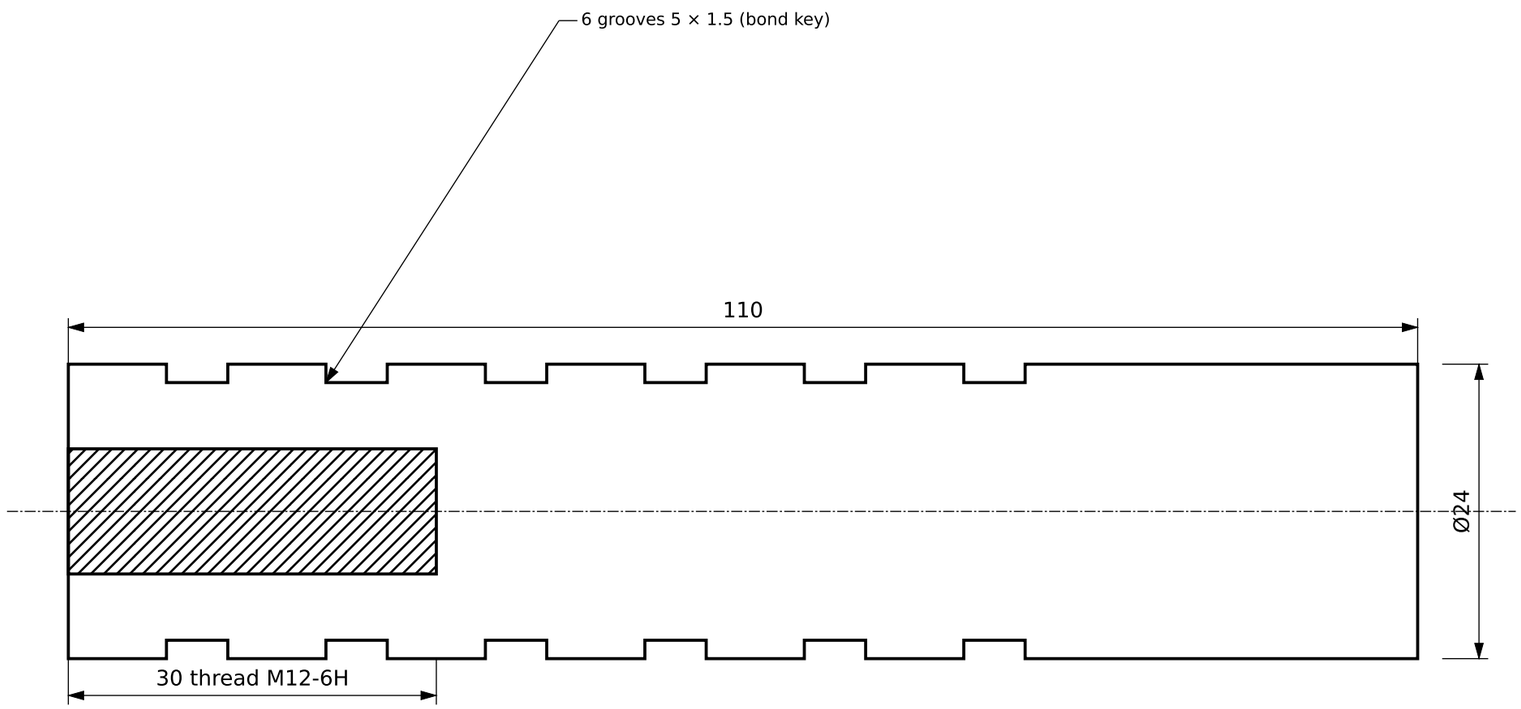


AXONOMETRIC VIEW (not to scale)

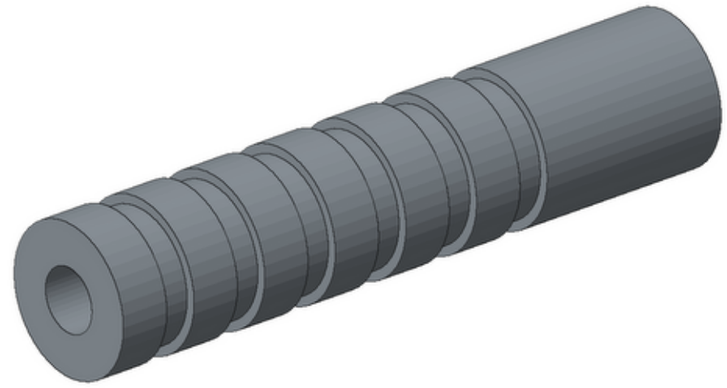

NOTES

1. Bonded into the blade root laminate during lay-up with the root fixture NS6-115: insert axis parallel to the pitch axis within 0.3°, PCD 185 ± 0.2, face flush ± 0.2 after root facing.
2. Pull-out test: 3 inserts per batch in a root coupon, ≥ 60 kN each (design 43 kN at SLM H, doc 30 §2).
3. Threads protected with plastic plugs until assembly; studs M12 10.9 × 75 (NS6-900) screwed in 30 mm with Loctite 270, 40 Nm.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

BLADE ROOT INSERT M12 (BONDED)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-105	B · 2026-11-06	2:1
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
C45E+QT, zinc-flake coated (Geomet 500)	0.33 kg	Claude / not checked