


HUB ROOT FLANGE (part of NS6-200), from the blade

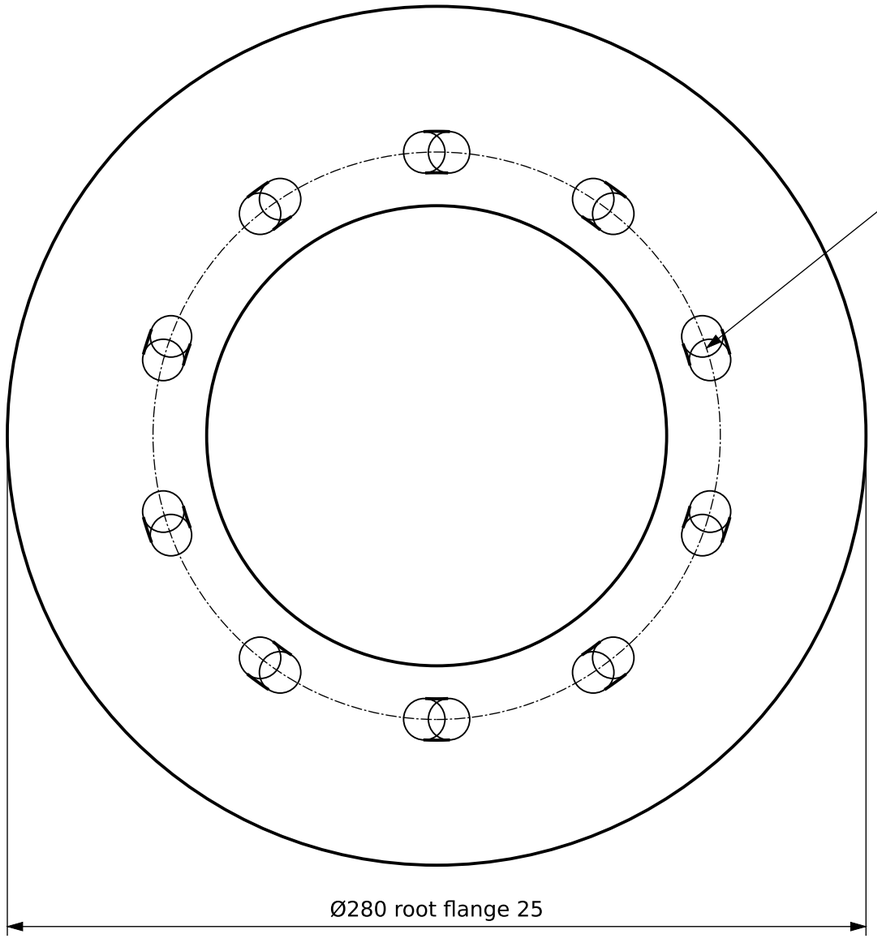


WASHER PLATE 28 × 4, 45 HRC

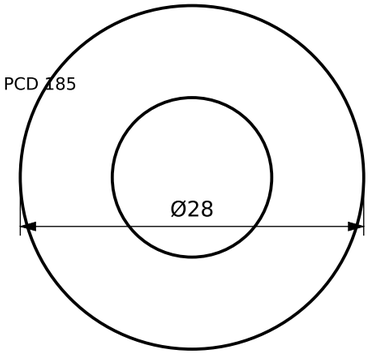

AXONOMETRIC VIEW (not to scale)

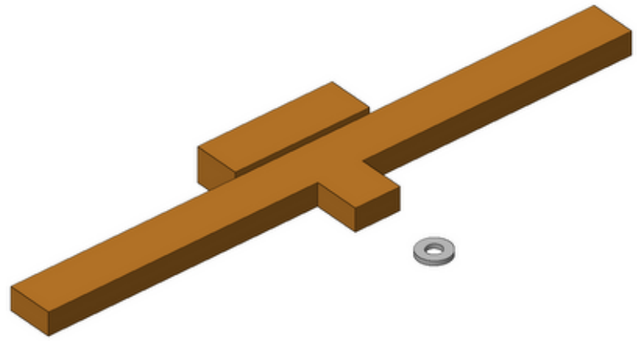

GAUGE NS6-135: clamps on r = 2 000 (chord line pads), inclinometer seat

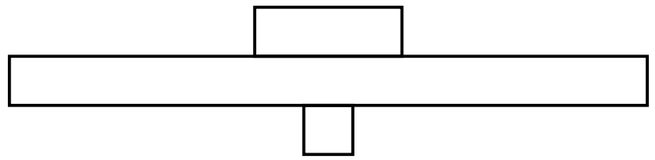

NOTES

1. Doc 30 called for wedge shims; a wedge tilts the blade axis (cone), it cannot change pitch. Rev B sets pitch by rotating the blade about its axis in arc slots of the hub root flange: ±2.5° around the −2.0° standard (−4.5° … +0.5°).
2. Setting: rotor locked with B1 horizontal, gauge on the blade at r = 2 000, rotor plane reference from a level on the hub front face; set −2.0° ± 0.1°, torque the studs, re-check.
3. Joint: 10 × M12 10.9 studs + hardened washer plates over the slots; friction carries the blade pitching moment (≤ 0.05 kNm) with μ 0.2 ≥ 10× margin.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

PITCH SETTING · ROOT SLOTS, WASHER PLATES, GAUGE

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-130	B · 2026-11-06	1:2 / 1:5
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
C45 hardened 45 HRC; gauge Al 6082	30 × 15 g; gauge 1.6 kg	Claude / not checked