


SIDE VIEW (yaw axis at x 0)

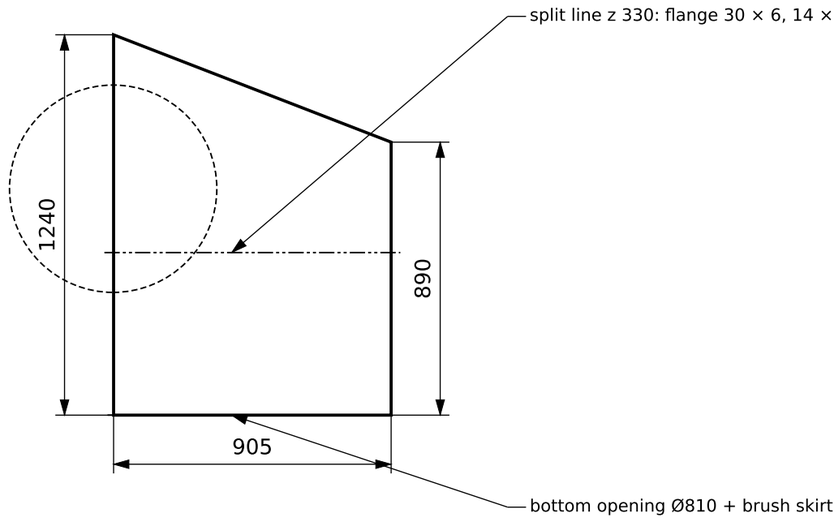


FRONT (opening Ø676 round the drum, 15 gap)

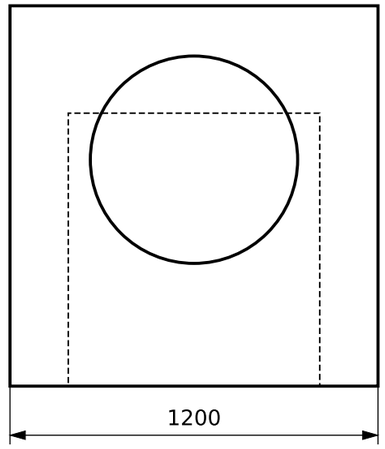

AXONOMETRIC VIEW (not to scale)

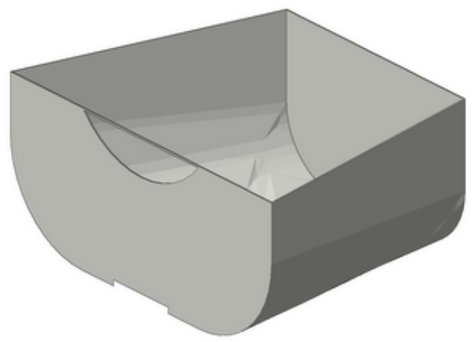

AXONOMETRIC VIEW (not to scale)

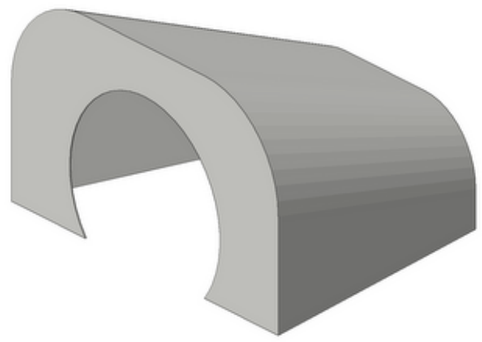

NOTES

1. Lofted rounded-rectangle shell, front 1 200 × 1 240 (R330) to rear 820 × 890 (R230); encloses the disc, caliper, bedplate, yaw drives and pad units; drum and spinner stay outside (drum cools in the free air).
2. Lay-up 4 mm: gelcoat 0.5 + 3 × 450 g CSM + 1 × 300 g woven; PU foam hat-section ribs every 300 mm; lid has 2 lifting points and a gas-strut-held service hatch 500 × 400 over the junction box.
3. Lower tray hangs on the NS6-710 arms (4 × M10 rubber mounts); the lid bolts to the tray flange. Air in at the bottom skirt, out through a labyrinth vent at the rear top (no forced cooling).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

NACELLE COVER · LOWER TRAY AND UPPER LID (GRP)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-700	B · 2026-11-06	1:20
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
glass/polyester 4 mm, gelcoat RAL 9010, PU foam ribs	19 + 22 kg	Claude / not checked