


ARM (4 off): flat 50 × 6, bolted 2 × M10 to the side plate



AXONOMETRIC VIEW (not to scale)

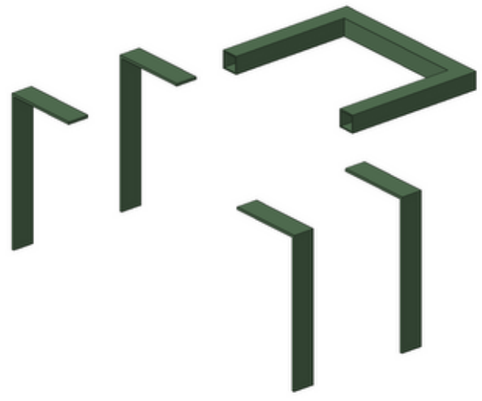




AXONOMETRIC VIEW (not to scale)



AXONOMETRIC VIEW (not to scale)

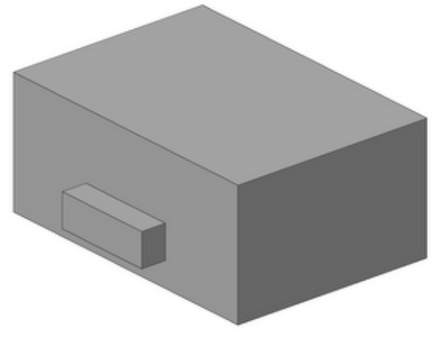

NOTES

1. Rear rail RHS 40 × 40 × 3 on the bedplate rear tie carries the junction box NS6-730 (IP66, 400 × 340 × 150) and the met mast clamp.
2. Met mast: wind sensors 0.5 m above the cover top (doc 25), air terminal bonded with 50 mm² Cu to the bedplate; the bedplate–tower path goes through the yaw pad brush (NY-410).
3. Junction box: phase terminals 3 × 16 mm², brake/sensor terminals, surge arresters for the sensor lines, 24 V supply; cable glands at the bottom only.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

COVER ARMS, REAR RAIL, MET MAST NS6-720, JUNCTION BOX NS6-730

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-710	B · 2026-11-06	1:10
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S235 galv.; mast 1.4404 Ø42.4 × 2	22 kg; 4.5 kg; 9 kg	Claude / not checked