
SIDE VIEW (wind from the left)



VIEW FROM UPWIND

Item	Value
Rated power	6 kW electric at ≈ 9.7 m/s (hub)
Rotor	Ø6.0 m, 3 blades, TSR 5.5, pitch −2° fixed
Speed	41–164 rpm, trip 189 rpm
Hub height	8.0 m; lowest tip 5.0 m
Tower	661 kg, f1 3.5 Hz (3.28 soft+ice)
Exclusion zone	60–77 rpm (3P × f1)
Head mass	982 kg above the tower flange (CAD)
Energy vs 18 m	−18 % coast … −26 % inland
Stopping	K1 resistor 3 × 4 Ω + spring brake 1.5 kNm
Storm	stop, yaw 90° out, hold

AXONOMETRIC VIEW (not to scale)

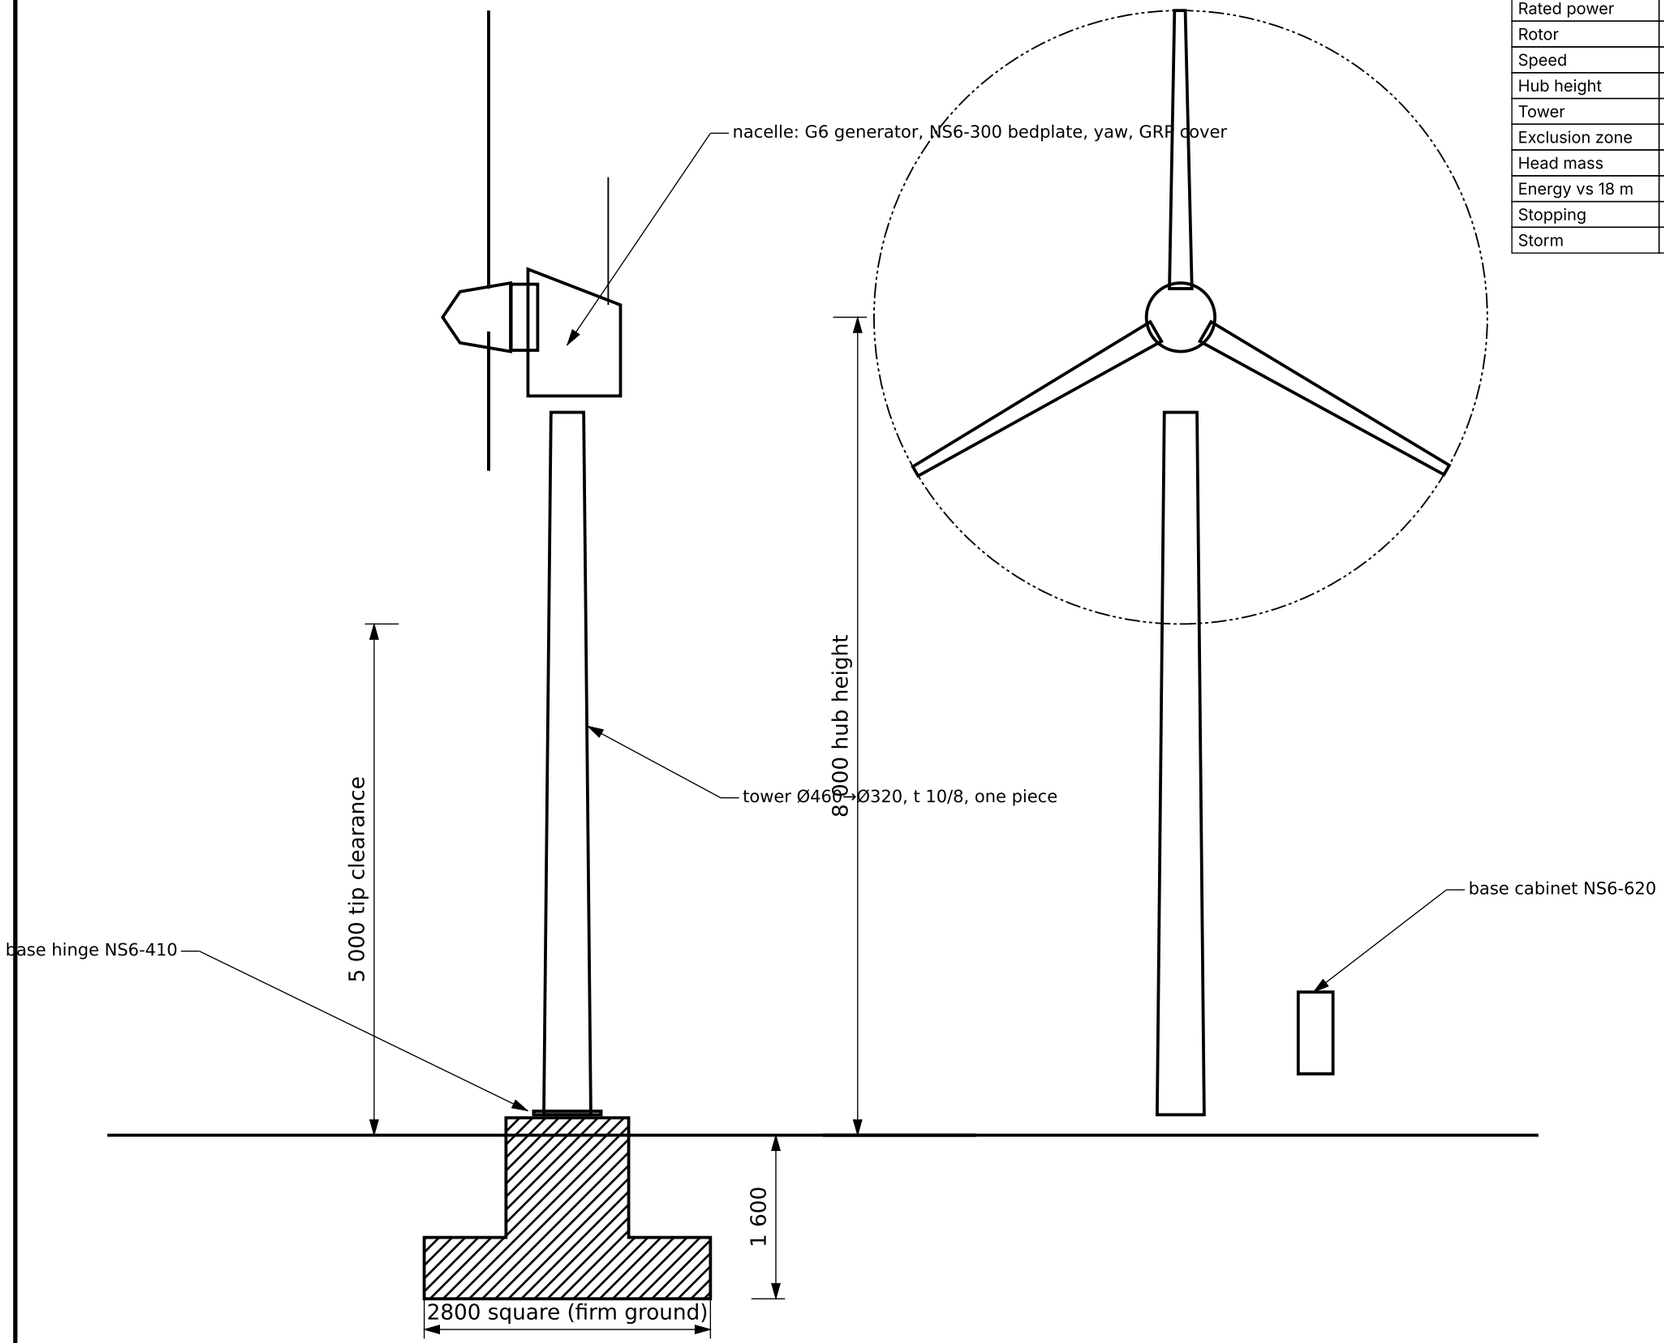

NOTES

1. Docs 28–34. Rev B: hub height 8 m (was 18 m), tower one piece, footing re-sized; all new parts drawn (index NS6-001).
2. Keep people and vehicles out of the rotor disc: fence or marked zone of radius 4 m round the tower base; ice-fall zone 1.5 × (H + D) = 21 m when icing is possible.
3. Siting at 8 m: rotor bottom must be clear of the wake of buildings and shelter belts (≥ 20 × obstacle height upwind in the main wind directions).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

GENERAL ARRANGEMENT · TURBINE ON 8 m TOWER

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-000	B · 2026-11-06	1:60
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
see BOM NS6-002/003	≈ 982 kg head + 661 kg tower	Claude / not checked