

SECTION ON THE ROTOR AXIS (yaw 0°, wind from the left)

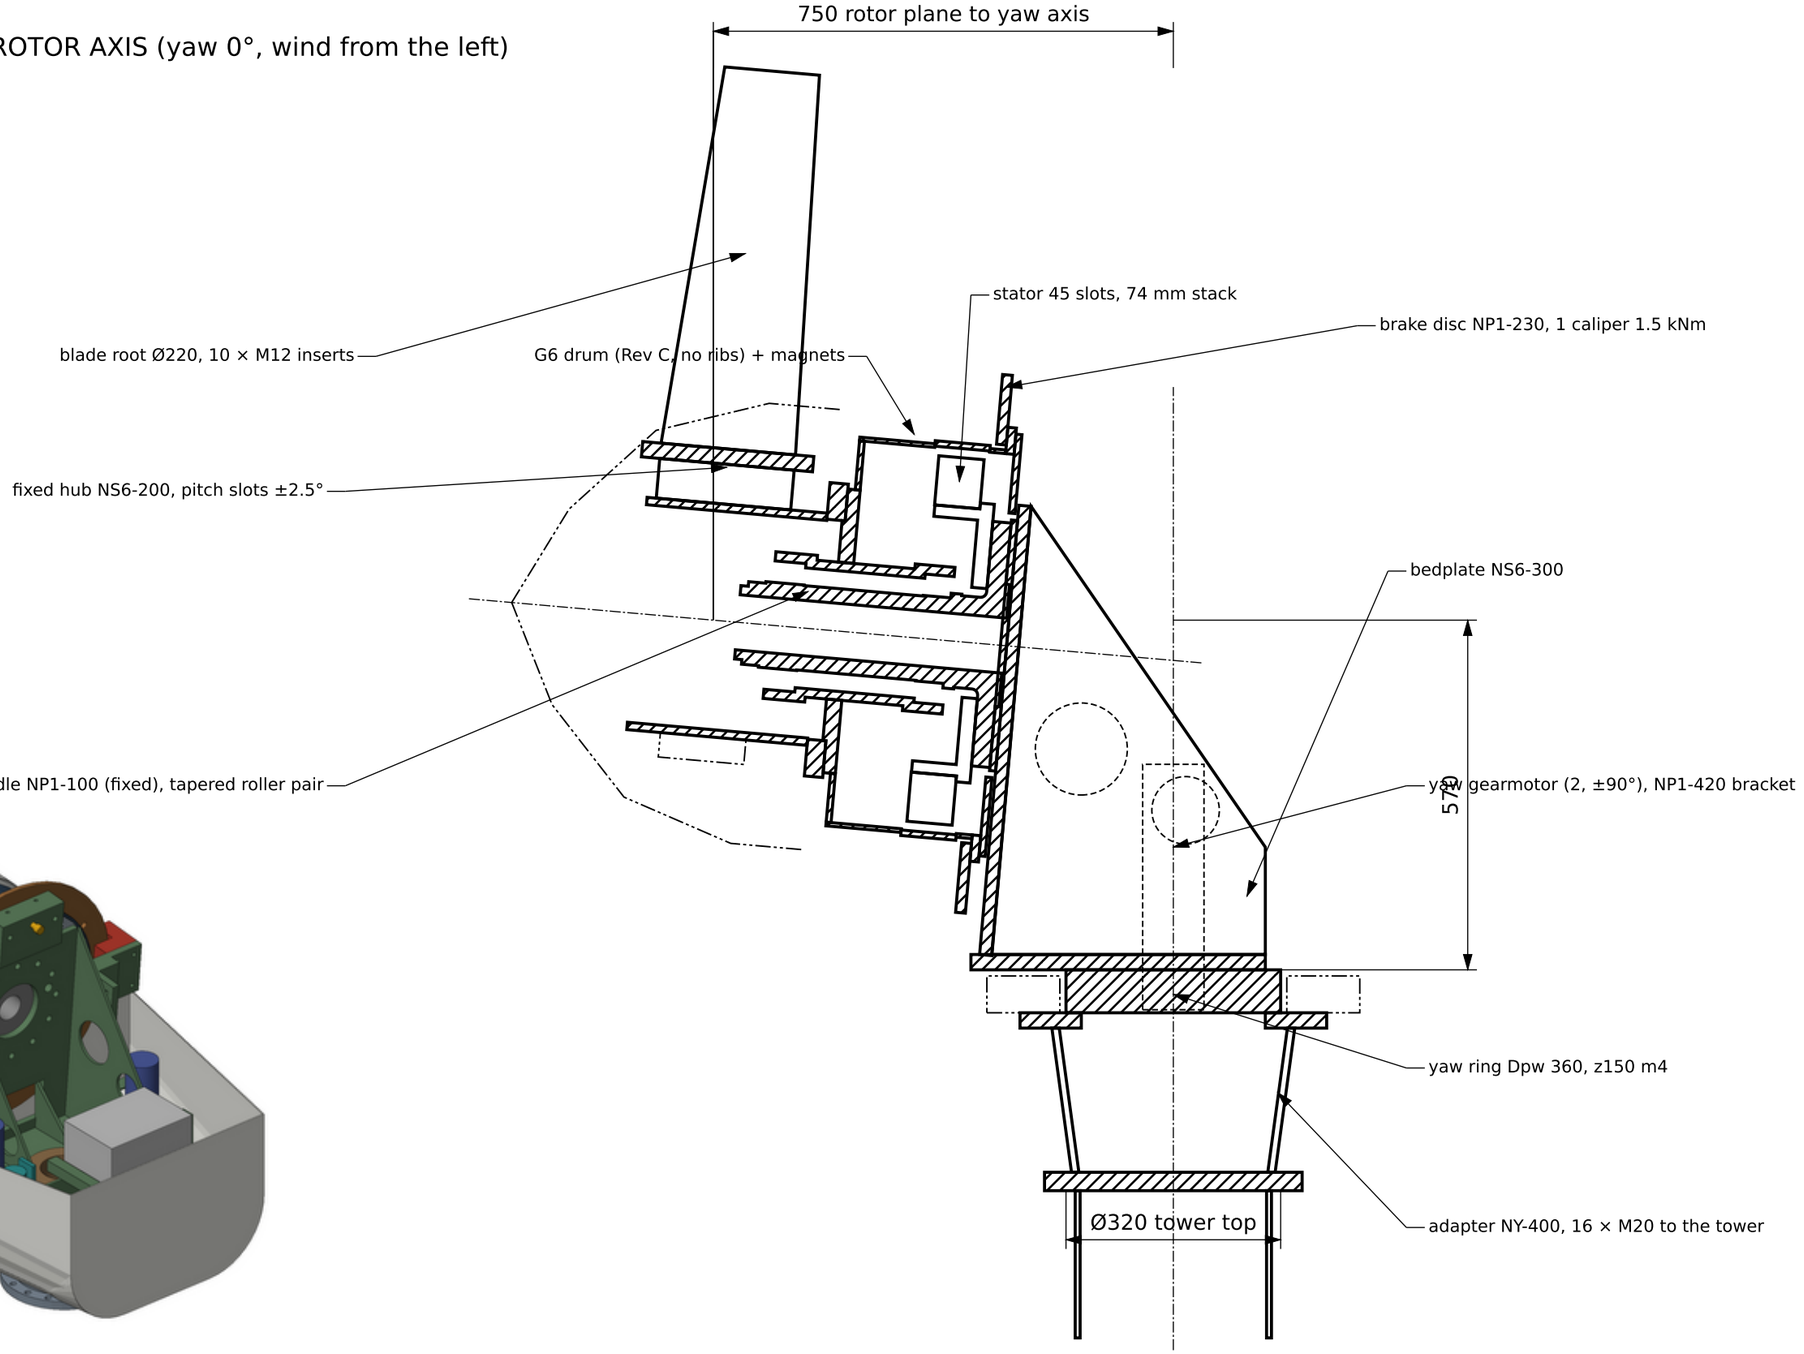

AXONOMETRIC VIEW (not to scale)

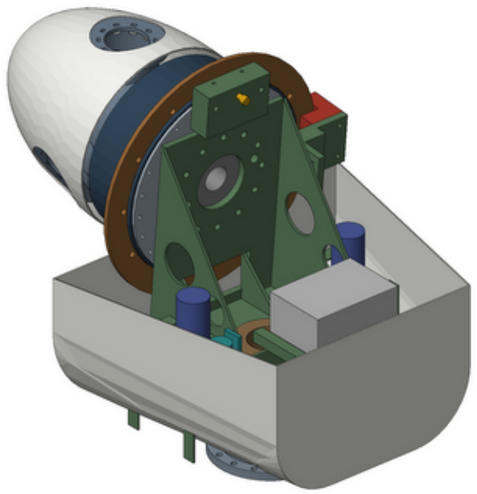

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

NOTES

1. Drivetrain geometry from cad/nacelle_p1/geometry.py (Rev B nacelle, Rev C generator, doc 23); fins, ribs and cover blades not fitted on G6 (doc 29).
2. Rotor turns with the drum on two tapered roller bearings on the stationary spindle; the hub bolts to the drum front face (12 × M16 PCD 400).
3. Section shows the hub arm of the upper blade; the other two arms are at ±120°. Spinner (phantom) is GRP, NS6-210. GRP nacelle cover NS6-700 not shown (see NS6-700).
4. Braking resistor box NS6-600 is mounted on the tower base cabinet wall, not in the nacelle (heat). Phase leads run in the hanger tube.

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

GENERAL ARRANGEMENT · NACELLE SECTION

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-010	B · 2026-11-06	1:10
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
see NS6-001	≈ 982 kg above the tower flange	Claude / not checked