


ROOT FIXTURE, view on the spigots: 10 × Ø11.8 g6 spigots × 30 on PCD 185

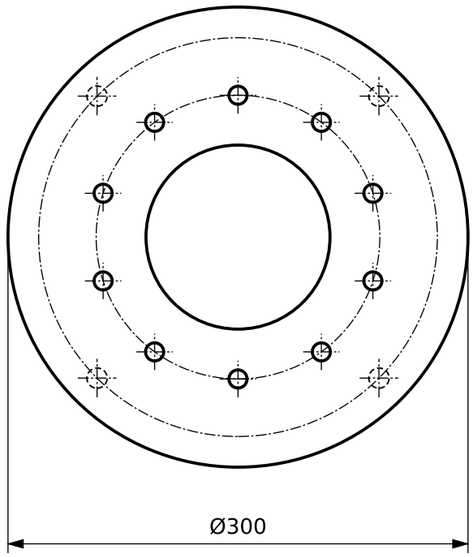

AXONOMETRIC VIEW (not to scale)

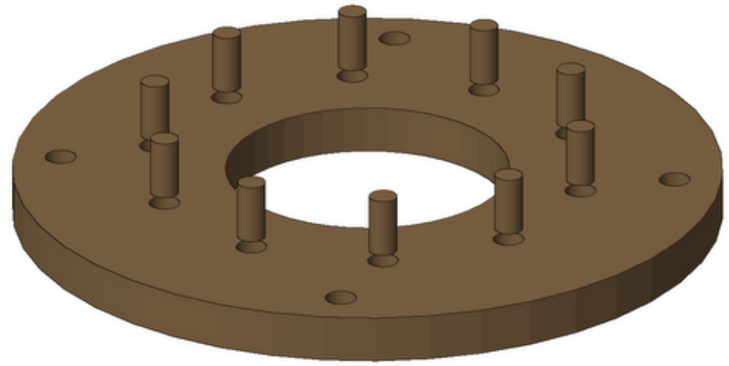

WEB MOULD PLATE (tapered, 10 mm Al)

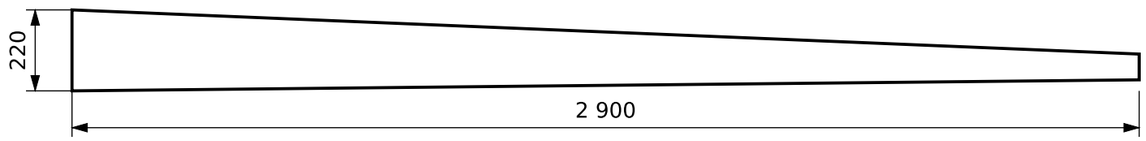

NOTES

1. Fixture bolts to the root end plate of the lower mould half (4 × M12); inserts NS6-105 slide over the spigots and are screwed on with M12 bolts so their faces sit on the fixture face.
2. After demoulding, remove the fixture, face the root on the root-facing jig (lathe or portable facer) to the root length, check PCD with the hub-flange template.
3. Web mould: flat plate with 25 mm edge flanges; web is infused flat (core 10 mm, 2 × 450 g ±45° each face) and cut to the template lines.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

ROOT INSERT FIXTURE AND WEB MOULD (TOOLS)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-115	B · 2026-11-06	1:4
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
S355 machined; Al 5083 plate	9 kg (fixture)	Claude / not checked