


SIDE VIEW

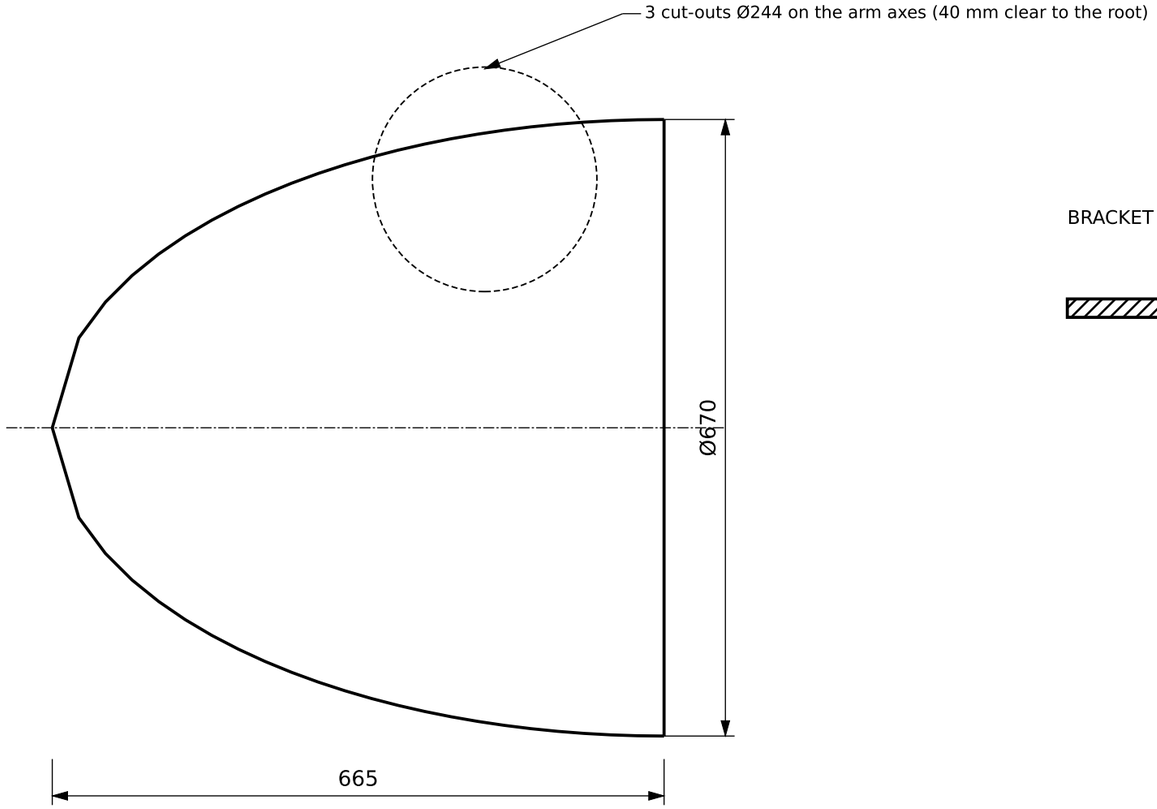

BRACKET NS6-211: 60 × 10 flat, 3 per hub, M8 rivnut in the s

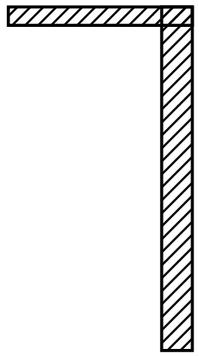

AXONOMETRIC VIEW (not to scale)

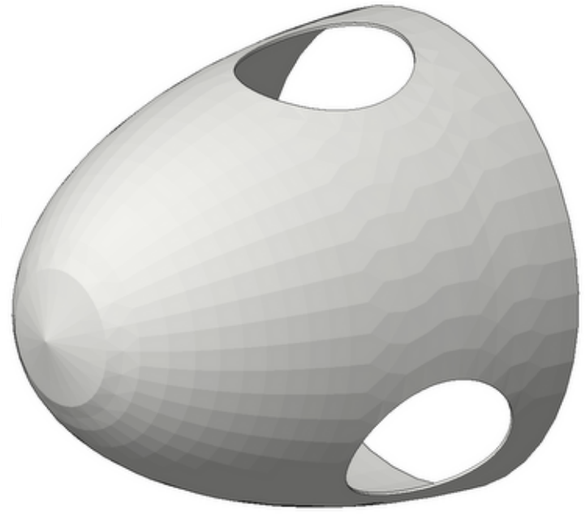

NOTES

1. Hand lay-up or RTM in a two-part female mould from the same plug supplier as the blades; 4 mm: gelcoat 0.5 + 3 × 450 g CSM + 1 × 300 g woven; flange-less rear edge with a 20 mm stiffening bead.
2. Rear edge runs 5 mm from the drum front web; the spinner does not seal (drain gaps at the cut-outs).
3. Fix with 3 × M8 1.4404 screws + rubber washers into the brackets; brackets weld to the hub front plate edge at 60° between the arms.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

SPINNER (GRP) AND BRACKETS NS6-211

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-210	B · 2026-11-06	1:5
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
glass/polyester 4 mm, gelcoat RAL 9010; brackets S275 galv.	8.7 kg + 3.6 kg	Claude / not checked