


NP1-310 · plan (x along the spindle, y lateral)




NP1-420 · top plate (pinion bore Ø34, 4 × M10)



AXONOMETRIC VIEW (not to scale)

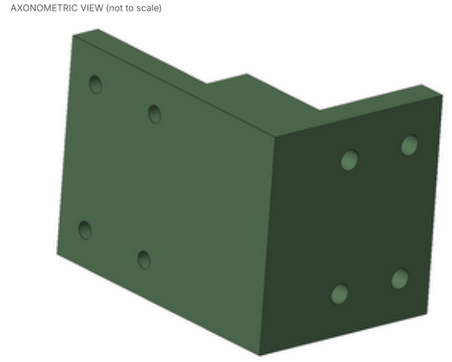

AXONOMETRIC VIEW (not to scale)

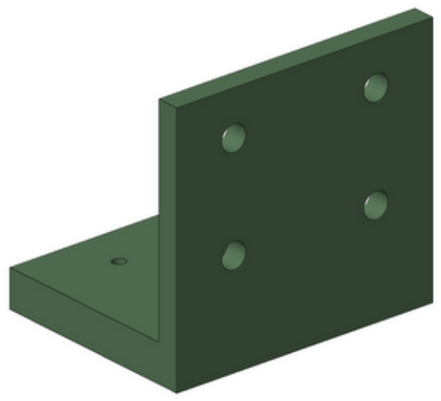

NOTES

1. NP1-310 (12 kW Rev B geometry, cad/nacelle_fitcheck): only the LEFT bracket is fitted on S6 (one caliper). Mounting plate 25 with 4 × M16 tapped to suit the chosen caliper; web 25 to the bedplate side plate, 4 × M16 10.9 through, 210 Nm.
2. NP1-420 (doc 25): top plate 25 + web 25; web bolts to the side plate outer face with 4 × M16 at x ±50, z 70/140; gearbox flange 4 × M10 8.8, 49 Nm. Centre distance pinion–ring 328.0 ± 0.1 (shim the web).
3. Both: welds a = 8 fillet all round, ISO 5817 C; hot-dip galvanise after welding, then machine the caliper face.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

CALIPER BRACKET NP1-310 AND YAW DRIVE BRACKET NP1-420

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-310	B · 2026-11-06	1:5
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N plate 25, welded, galv.	18.1 kg; 2 × 7.7 kg	Claude / not checked