


VIEW FROM THE REAR

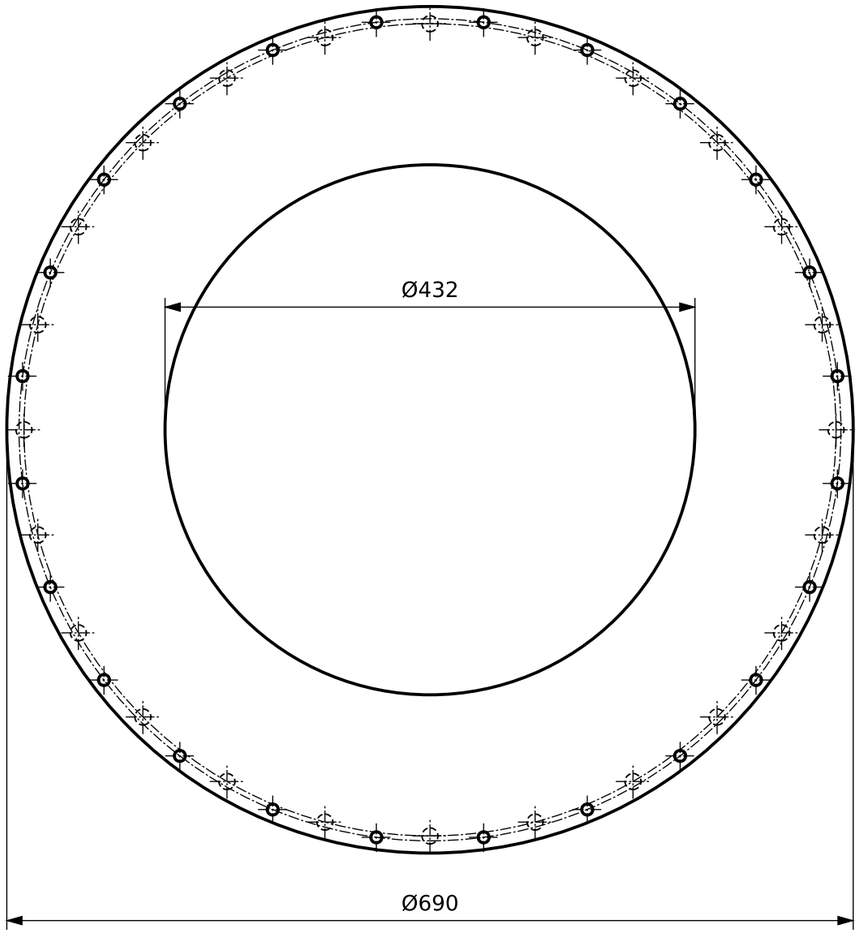

SECTION

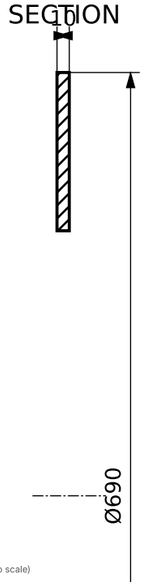

AXONOMETRIC VIEW (not to scale)

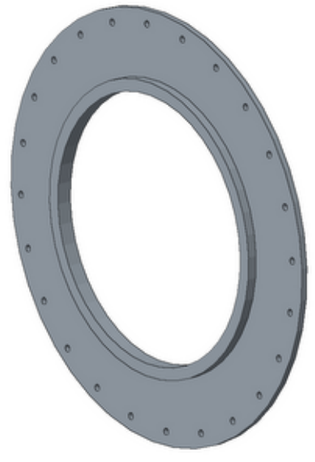

NOTES

1. Replaces the Rev C rear cover with 24 fan blades (doc 23/29): G6 runs at half load with no forced cooling; hot spot 86 °C at 1.2 × rated torque without fins, ribs or blades (doc 29).
2. 24 × M8 on PCD 670 to the drum rear ring; seal carrier as Rev C (NP1-212 inner ring).
3. Rear face runs 5 mm from the bedplate front plate outside the Ø410 pad (as Rev B).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

G6 PLAIN REAR COVER (NO FAN BLADES)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-610	B · 2026-11-06	1:5
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
EN AW-5083-H111, 10 mm plate	≈ 7 kg	Claude / not checked