
Item	Specification	Interface	Candidates / note
NS6-911 yaw ring	4-point ball slewing ring Dpw 360, ext. gear z150 m4, ind. hardened teeth	inner 16 × M16 PCD 300; outer 16 × M16 PCD 440	Rollix / Kaydon / IMO; tilt 34.6 kNm s0 ≥ 1.44
NS6-912 yaw gearmotor (2)	0.18 kW, i ≈ 1 680, output ≥ 1 500 Nm static, brake 2 Nm	flange 4 × M10 on 80 square, pinion z14 m4	SEW / Bonfiglioli / NORD
NS6-913 main bearings (2)	tapered roller 32028 X (140 × 210 × 45)	spindle Ø140 f6 / j6	SKF / FAG / Timken, C3 not needed
NS6-914 overspeed sensors (2)	inductive M18 PNP, −40 °C, IP68	holder NP1-321	ifm / Pepperl+Fuchs
NS6-915 rotor brake caliper	spring-applied, power-released, 16 mm disc, 1.5 kNm at r 0.41 m	4 × M16 on NP1-310	Svendborg BSFI / Altra / Ringspann
Magnets	200 + 10 × N45SH 30 × 15 × 12, NiCuNi + epoxy	drawing NP1-220E	Neo / VAC (non-Asian, doc 23)
K1 contactor	3-pole AC-3 ≥ 63 A 690 V, mirror contacts	NS6-600	ABB / Siemens
Converter, chopper, modules	doc 12 SiC rectifier etc., 6 kW firmware	NS6-620	in-house (doc 12)
Met sensors	heated cup anemometer + vane, −40 °C	NS6-720	Thies / Lufft
Yaw encoder	absolute multi-turn SSI, IP67	NY-440	Kübler / Sick

NOTES

1. Envelopes in the CAD model are estimates; replace them with the supplier STEP files before the clash check of the prototype build.
2. All bought parts: operating −30 °C, survival −40 °C, salt fog C5 (doc 02); certificates 3.1 for structural parts (slewing ring, bearings, bolts).


AXONOMETRIC VIEW (not to scale)

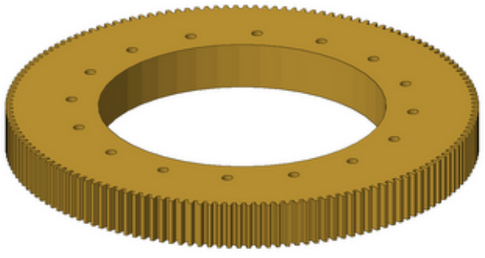

AXONOMETRIC VIEW (not to scale)



AXONOMETRIC VIEW (not to scale)

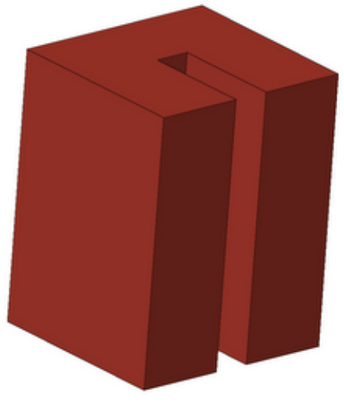

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

BOUGHT PARTS SPECIFICATION (ENVELOPES AND INTERFACES)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-910	B · 2026-11-06	–
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
see lines	see lines	Claude / not checked