

Item	Value
Rated power	6 kW electric at ≈ 9.7 m/s
Rotor	Ø6.0 m, 3 blades, TSR 5.5, fixed pitch −2°
Speed	41–164 rpm, trip 189 rpm
Control	stall by speed (converter), storm ramp 25–30 m/s
Stopping	K1 braking resistor 3 × 4 Ω + spring brake .5 kNm
Storm	stop, yaw 90° out, hold
Hub height	18 m, tilt-up monopole
Tower f1	0.87 Hz (exclusion 47.5–57.4 rpm)
Head mass	≈ 912 kg above the tower flange
Tower mass	1824 kg

SIDE VIEW (wind from the left)

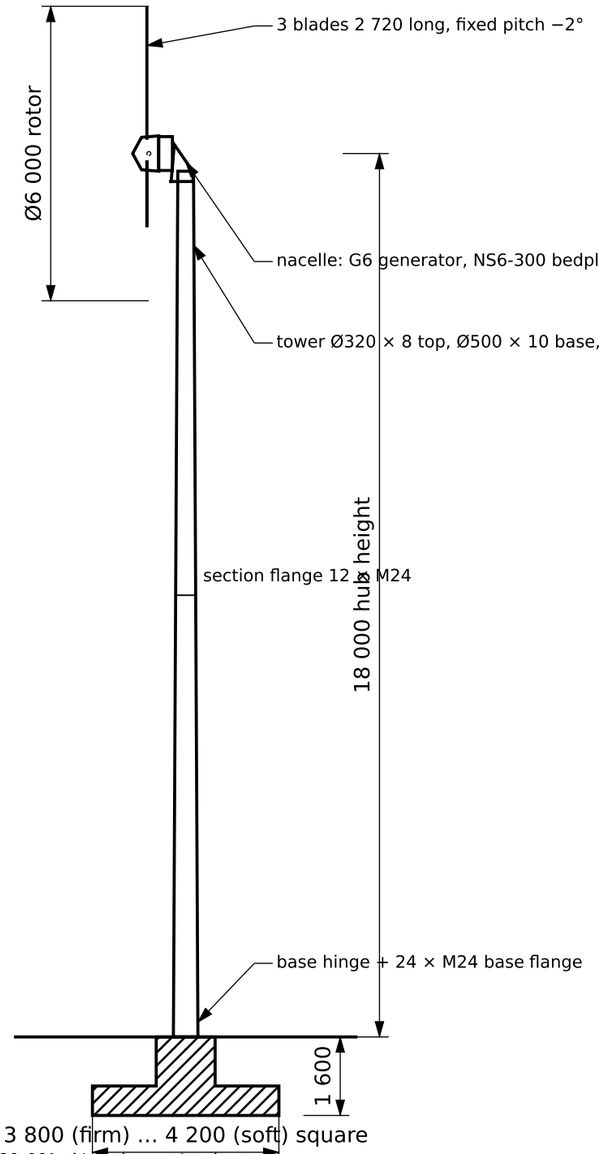

VIEW FROM UPWIND

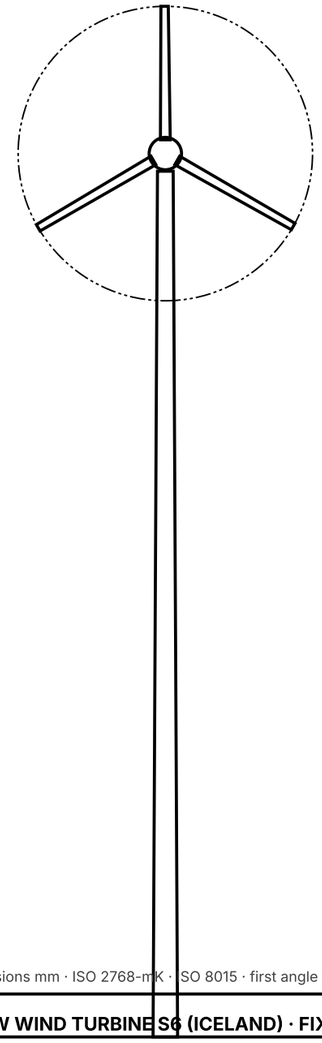

NOTES

1. Docs 28–32. Shared 12 kW parts are listed on NS6-001 with their own drawing numbers.
2. Rotor plane 750 mm upwind of the yaw axis, shaft tilt 5°, rotor centre 570 mm above the yaw bearing top face.
3. Footing size depends on the ground class (doc 30 §6): firm 3.8 m / 9.5 m³, frost silt 3.9 m / 10.0 m³, soft volcanic 4.2 m / 11.4 m³; rock: 1.6 × 1.6 × 0.8 m plinth with 8 anchors (NS6-500).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

GENERAL ARRANGEMENT · TURBINE

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-000	A · 2026-11-06	1:125
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
see parts list	≈ 912 kg head + 1824 kg tower	Claude / not checked