SECTION

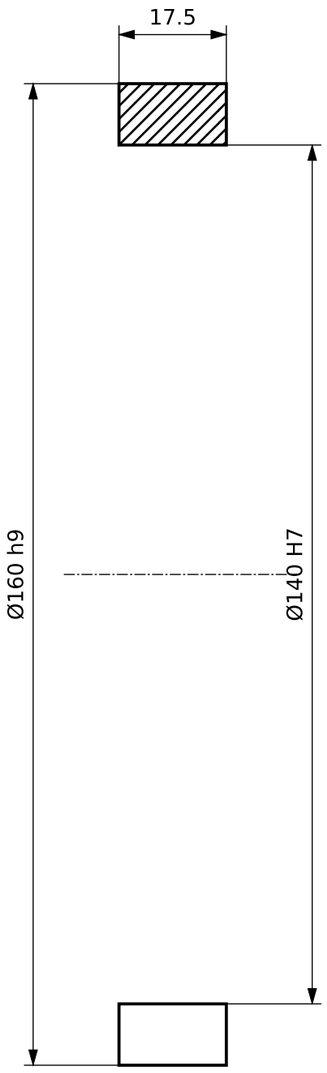


**NOTES**

1. Faces parallel within 0.005 (it sets the bearing preload path).
2. Ø160 surface induction hardened 55 to 60 HRC, depth 1 mm, ground Ra 0.2 to 0.4, no lead.
3. Bore chamfer 1.5×30° on the cone side.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

**12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1**

# FRONT SPACER (LIP SEAL COUNTERFACE)

| DRAWING NO. | REV / DATE | SCALE (A3) |
|---|---|---|
| NP1-101 | A · 2026-11-02 | 1:1 |
| MATERIAL | MASS (CALC.) | DRAWN / CHECKED |
| 42CrMo4+QT, surface induction hardened | 0.6 kg | Claude / not checked |