FRONT COVER: lip seal 160×190×10 HNBR + V-ring

6× Ø9 PCD 225; seal bore H8, Ra 1.6

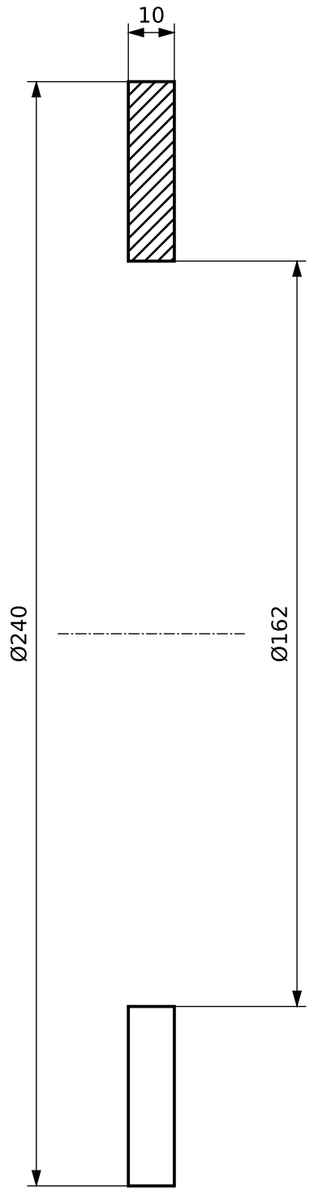

REAR COVER: lip seal 150×180×10 HNBR

6× Ø9 PCD 225; seal bore H8, Ra 1.6

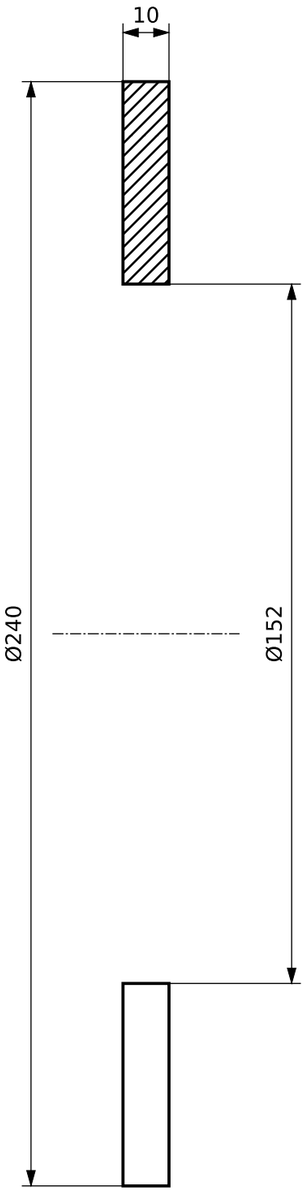

NOTES

1. Seal lips face the bearing (grease retention); V-ring outside on the front cover runs against the spacer face.
2. Purge: grease exits under the lip; collect with absorbent ring at service.
3. Pilot on the housing bore Ø210, 2 mm deep (not shown), for concentric seals.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

MAIN BEARING SEAL COVERS (FRONT / REAR)

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-211	A · 2026-11-02	1:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2	4.1 kg	Claude / not checked