VIEW FROM REAR · plate 10, seal ring 15 × 20 welded (x 450 to 465)

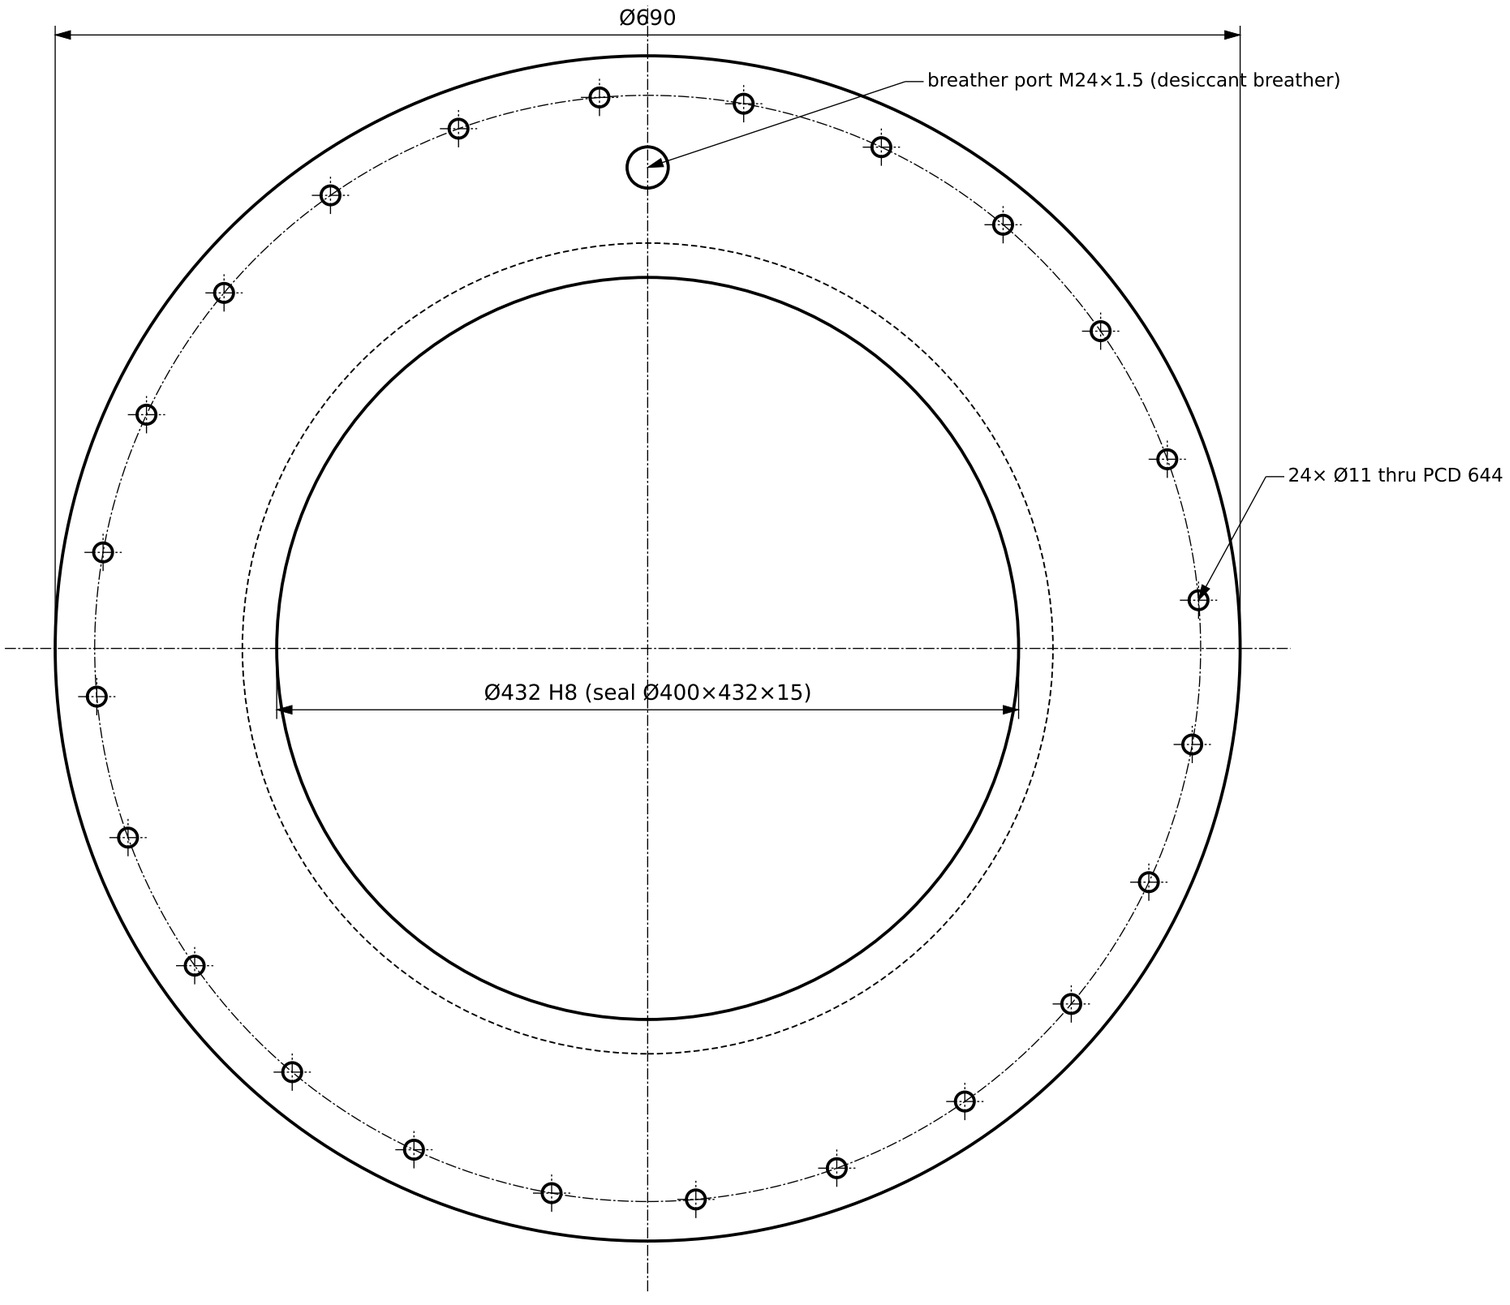

NOTES

1. Rear seal: radial lip seal Ø400×432×15 HNBR −40 °C (or split seal), plus labyrinth groove; runs on the spindle flange OD (3.7 m/s at 178 rpm).
2. Ring to plate: TIG fillet both sides, then machine seal bore concentric to the bolt-circle pilot within 0.05.
3. Inspection port Ø60 with cover at 180° (not shown) for air-gap feeler and sensor cables during P1 tests.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

DRUM REAR COVER WITH SEAL CARRIER

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-212	A · 2026-11-02	1:3.6
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
EN AW-5083-H111 plate + ring	7.3 kg	Claude / not checked