LOCK PIN

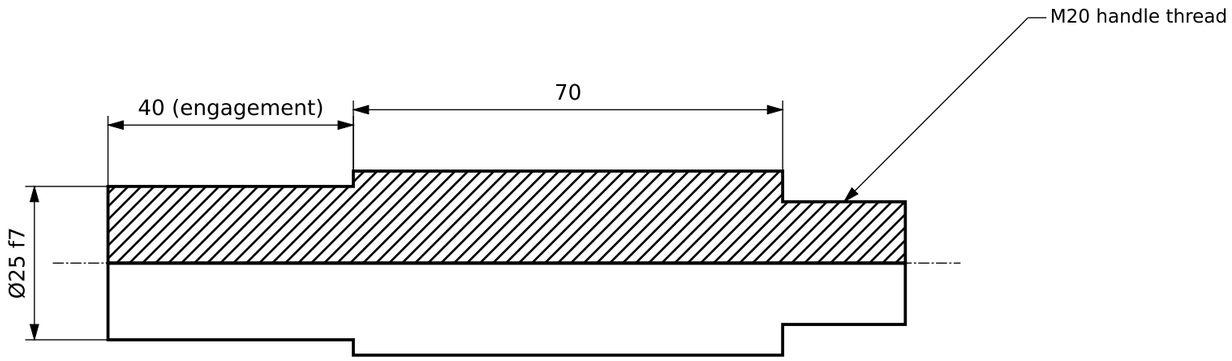

NOTES

1. Shear at 8.7 kNm on PCD 662: 26 kN, τ = 54 MPa (allowable 300). Pin goes through the holder bush on the bedplate bracket into a disc lock hole (20 mm) and the ring behind (20 mm).
2. Holder has a proximity switch that reports 'pin engaged' to the safety chain (no rotor release while engaged, doc 11).
3. Insert only at standstill with the brake applied.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

ROTOR LOCK PIN AND HOLDER

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-320	A · 2026-11-02	1:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
pin 42CrMo4+QT; holder S355J2	≈ 4 kg	Claude / not checked