SECTION (x as in GA; drive end left)

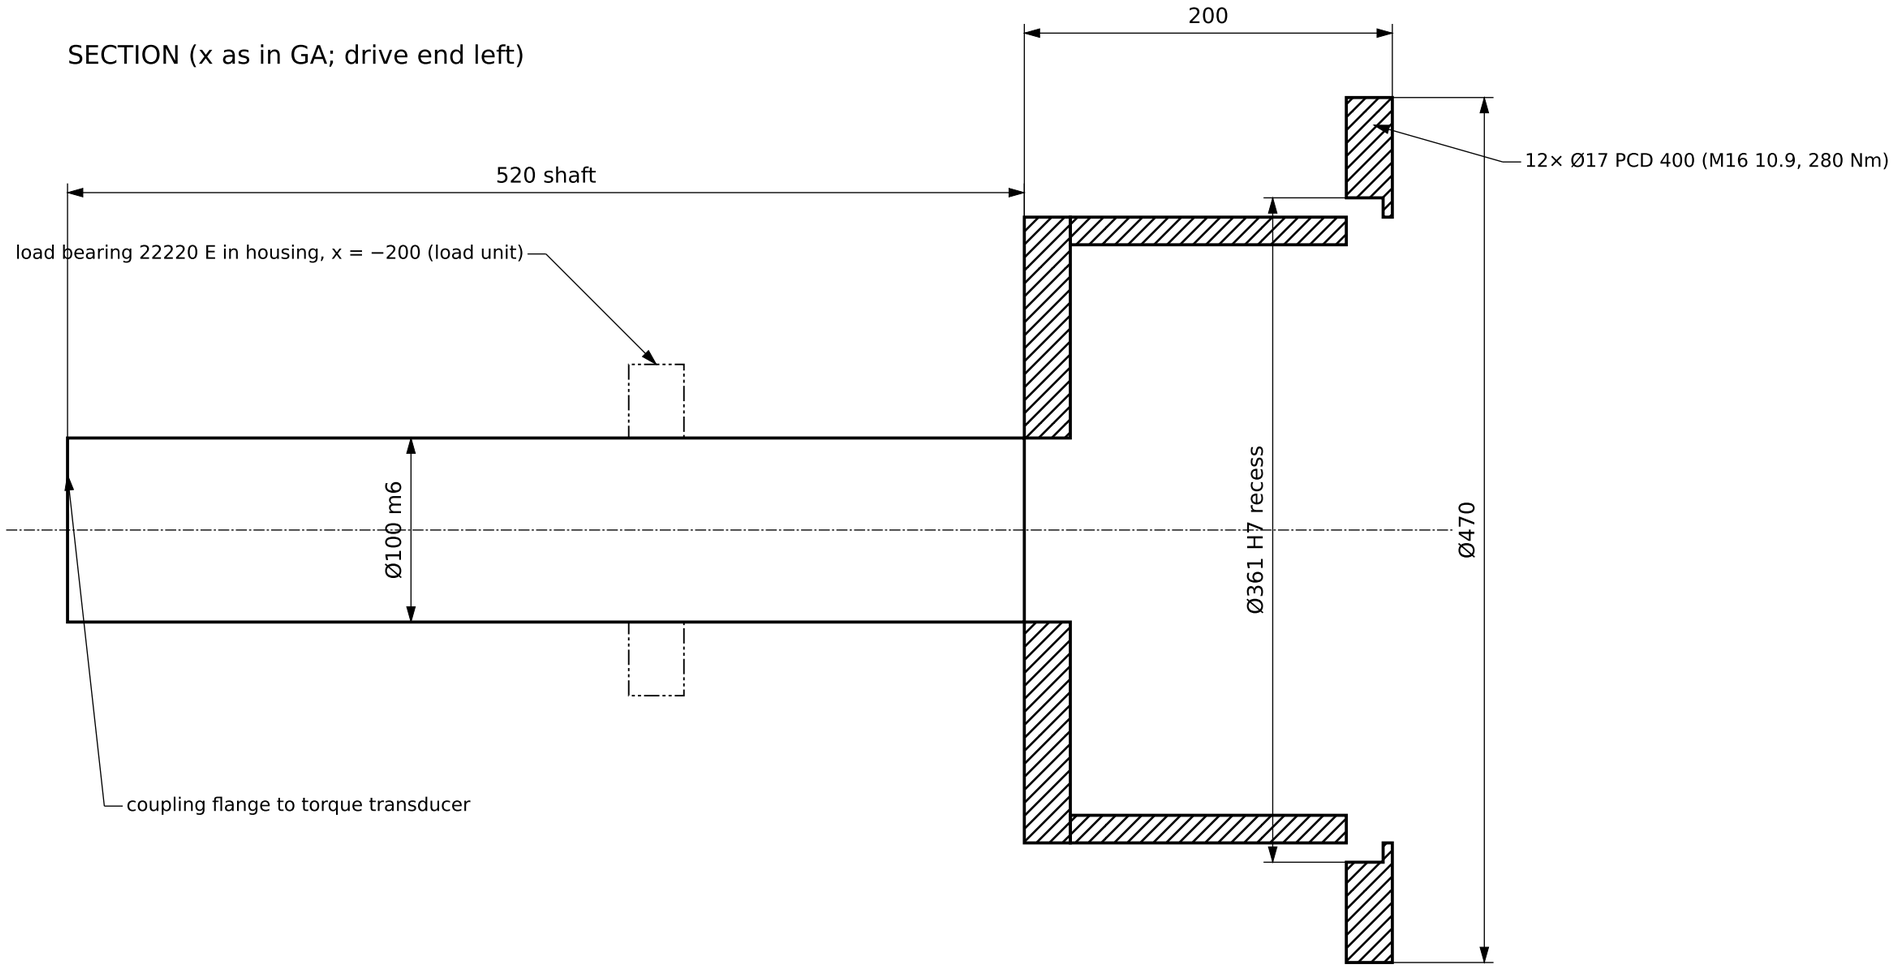

NOTES

1. Replaces the cast hub for P1. Same interface as doc 13: 12× M16 10.9 on PCD 400, Ø360 spigot; it clears the spindle nose, nose cap and front seal cover (min. radial gap 30).
2. Shaft Ø100 forged 42CrMo4+QT, shrink fitted and welded into the front plate; run-out of Ø100 to the recess ≤ 0.05.
3. Radial arm interface (not shown): 4× M24 on the bell at 90° for the 1.0 m torque arm used in brake, lock pin and yaw tests (doc 15).
4. Balanced with the drum to G2.5.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

BENCH DUMMY HUB (DRIVE AND LOAD ADAPTER)

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-600	A · 2026-11-02	1:3.3
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N weldment, stress relieved	≈ 75 kg	Claude / not checked