
VIEW FROM FRONT (inside), plate 10, seal ring 15 × 20 at x 450 to 465

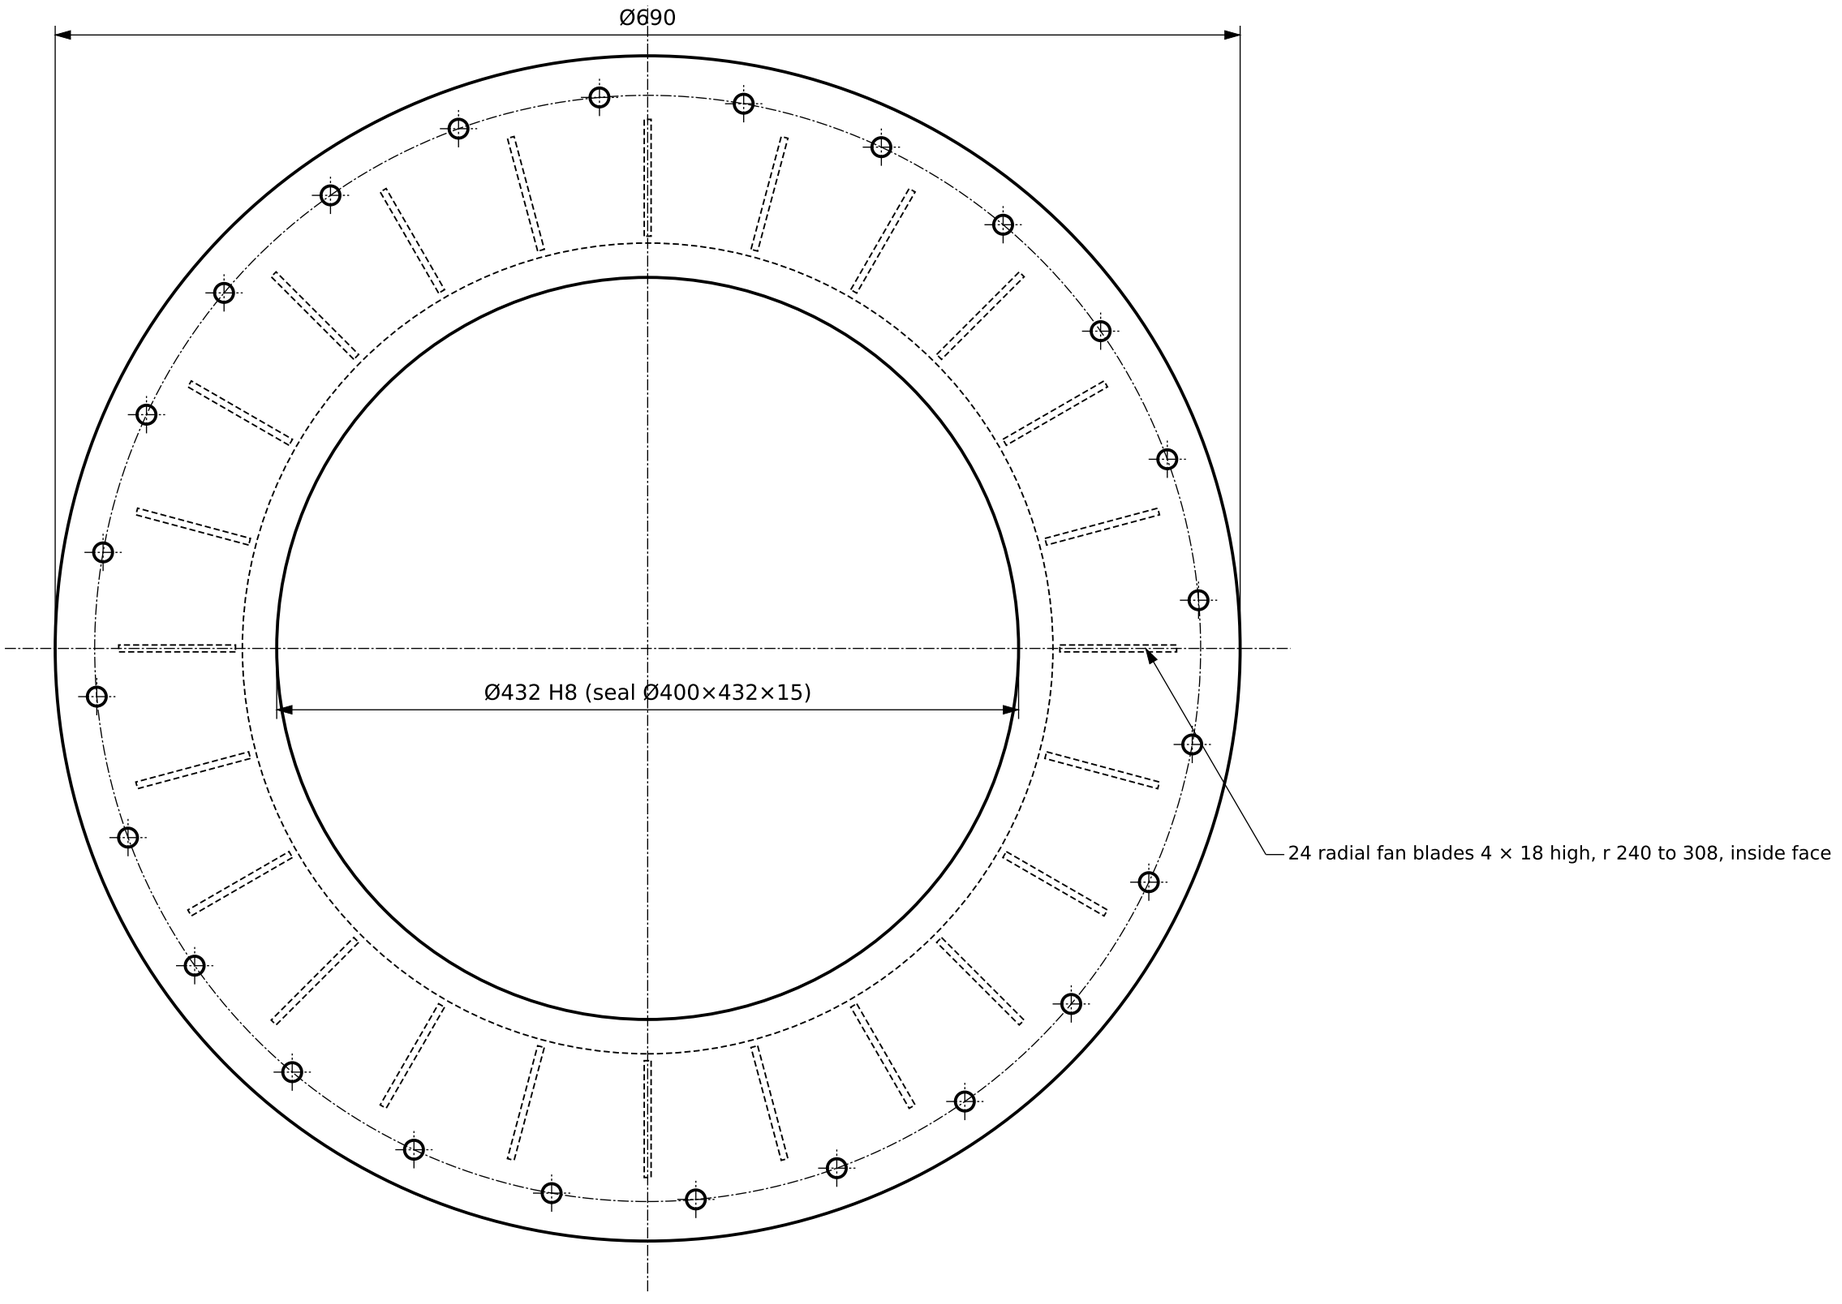

NOTES

1. Rev C (doc 23 §6): 24 radial blades welded (TIG) or bolted to the inside face; they stir the internal air over the end windings and carry heat to the cover (h_int ≈ 40 W/m²K instead of 15, to be measured on the bench, doc 15 T5).
2. Blades span x 447 to 465: 8 mm clear of the potted end turns (x ≤ 439) and of the carrier rear stop (x 440); tips r 308 run 4 mm inside the shell bore Ø624.
3. Rear seal: radial lip seal Ø400×432×15 HNBR −40 °C on the spindle flange OD; breather port M24×1.5 with desiccant breather.
4. Balance with the rotor (NP1-210C note 6). Inspection port Ø60 with cover at 180° (not shown).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

DRUM REAR COVER WITH SEAL CARRIER AND FAN BLADES

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-212C	C · 2026-11-05	1:3.6
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
EN AW-5083-H111 plate, ring and blades	≈ 9.0 kg	Claude / not checked