PLAN, seen from the stator (3:1). Steps set the row skew.

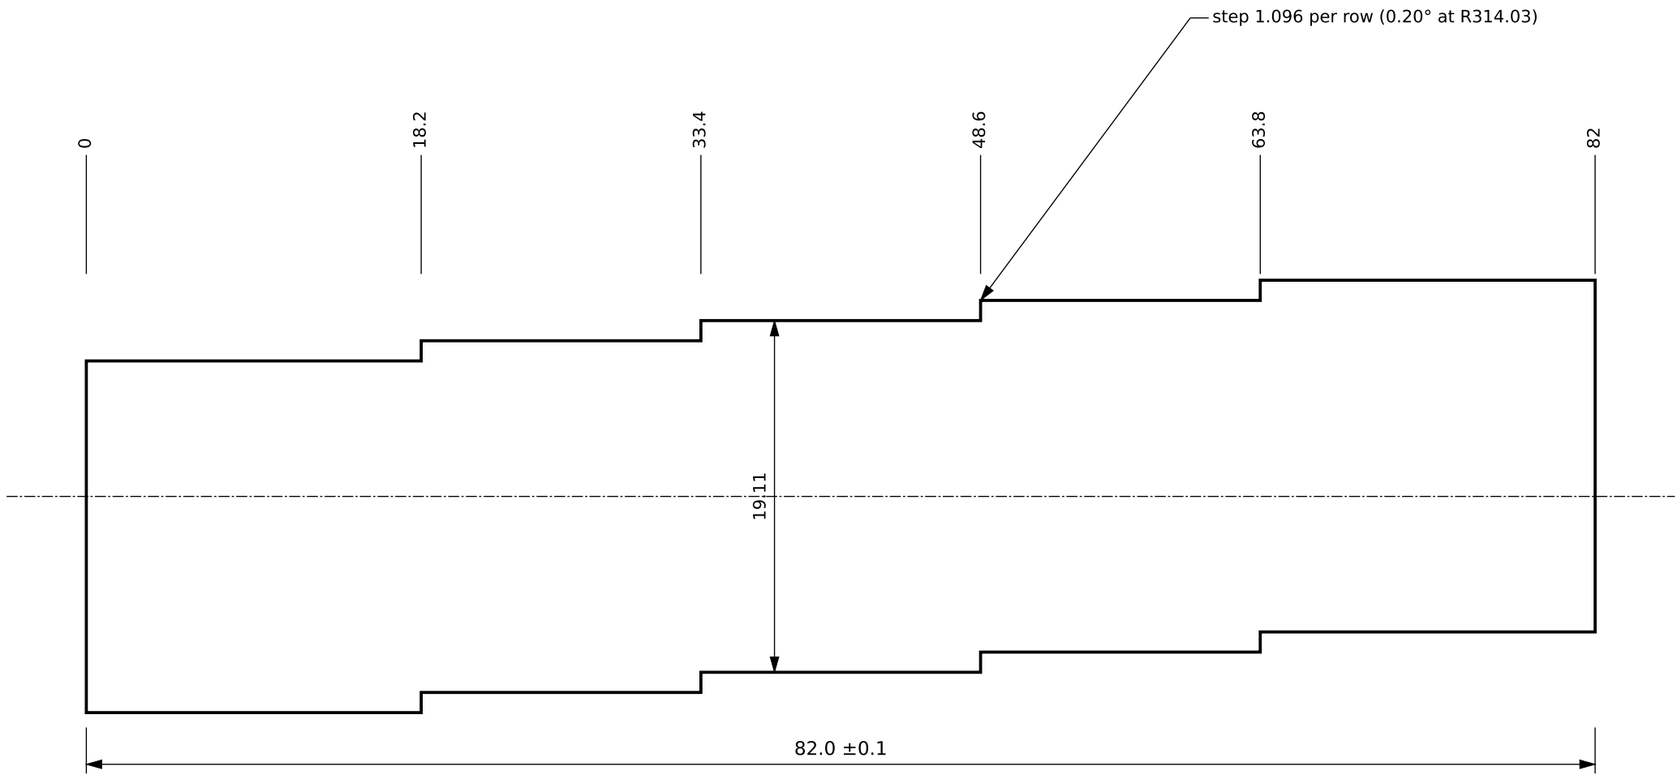

SECTION (5:1), flanks follow the block sides

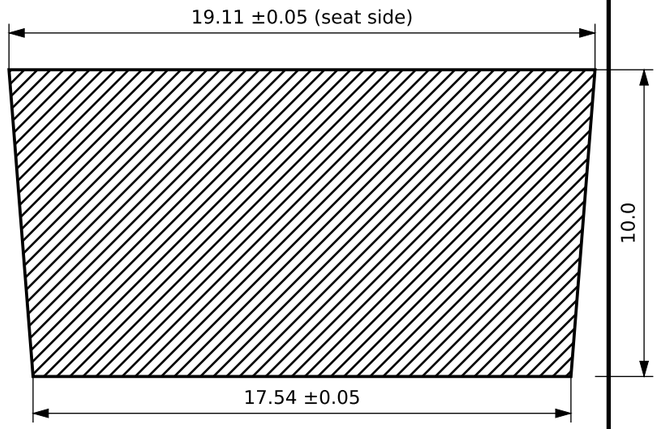

NOTES

1. One bar per pole gap (40 per rotor + 4 spare). Bar sits on the seat (wide face), bonded with the magnet epoxy; ends engage 4 mm pockets in the end rings NP1-222C.
2. Row boundaries (ordinates from the front end): steps of 0.20° each; the bar is identical for every gap. Mark the front end.
3. Side faces are the datum for the blocks: 0.10 glue clearance each side (comb width = gap between neighbouring blocks − 0.20).
4. G11 (class H), ±0.05 on widths; edges deburred, no delamination. Prove on the Q1 panel (doc 18 §10).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

STEPPED POLE COMB BAR (40 + 4 PER ROTOR)

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-221C	C · 2026-11-05	3:1 / 5:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
G11 glass-epoxy sheet, CNC machined	≈ 25 g	Claude / not checked