3 Part catalogue


Axonometric view, part number, material and mass of every part

Axonometric view, part number, material and mass of every part


3 Part catalogue (axonometric views)




NM8-100 ×3
Blade Ø8.0 m, glass/epoxy, carbon UD caps (B1–B3)
E-glass/epoxy, carbon UD caps, PVC core
make · 34.1 kg each · drawing NM8-100

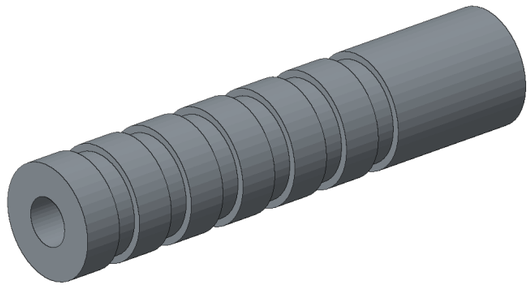

NM8-105 ×36
Root insert M16 (12 per blade, bonded)
C45E+QT zinc-flake coated
make · 0.8 kg each · drawing NM8-105

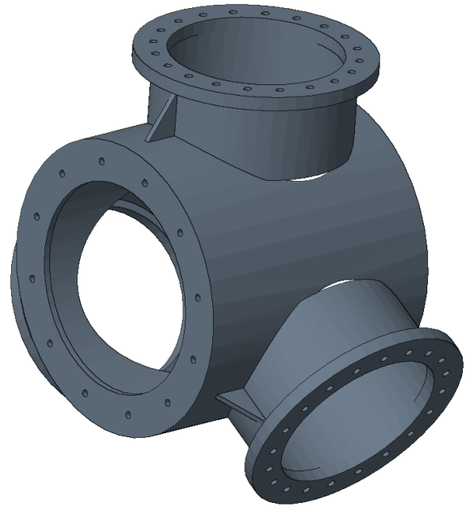


NM8-200 ×1
Hub weldment: shell Ø530 × 10, 3 necks Ø360, drum flange
S355NL, welded, stress relieved, machined
make · 179.8 kg each · drawing NM8-200

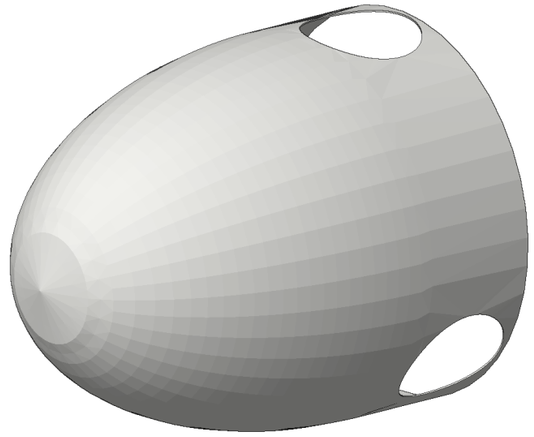


NM8-210 ×1
Spinner (GRP 4 mm) with blade boots
glass/polyester, gelcoat RAL 9010
make · 27.6 kg each · drawing NM8-210




NM8-250 ×1
Pitch bearings Dpw 300 four-point (3, bought)
bought: 42CrMo4 rings
buy · 76.2 kg each · drawing NM8-250

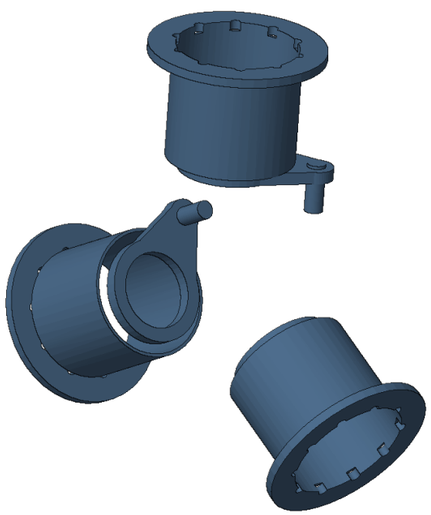


NM8-260 ×1
Pitch cranks r140 with pins (3)
42CrMo4+QT / S355 tube
make · 30.0 kg each · drawing NM8-260

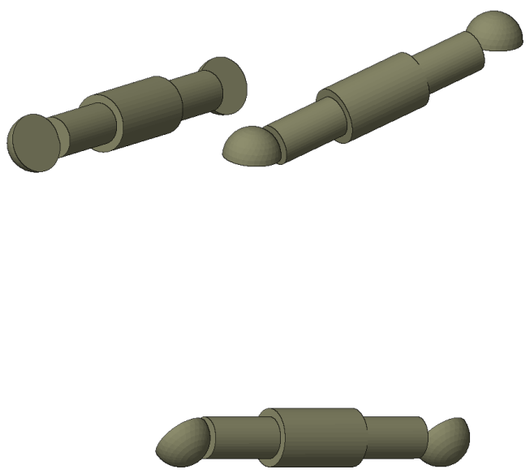


NM8-261 ×1
Pitch links 220 mm with spherical eyes (3)
S355 / bought rod ends
make · 4.5 kg each · drawing NM8-261

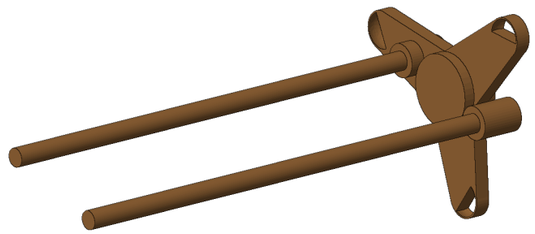


NM8-262 ×1
Yoke + 3 guide rods
S355 plate / C45 chromed rods
make · 8.0 kg each · drawing NM8-262

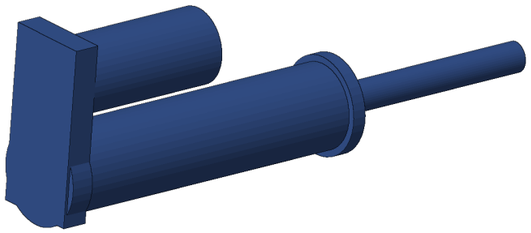


NM8-270 ×1
Electric pitch cylinder ~28.5 kN rated, 204 mm stroke + motor (bought)
bought
buy · 14.0 kg each · drawing NM8-250

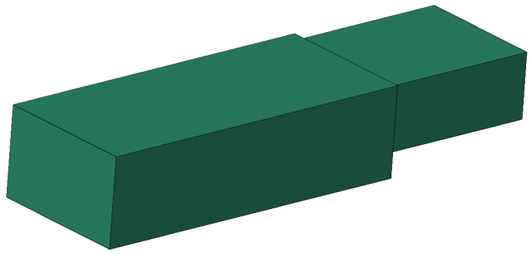


NM8-280 ×1
Supercap module + pitch drive/controller (bought)
bought
buy · 6.5 kg each · drawing NM8-250

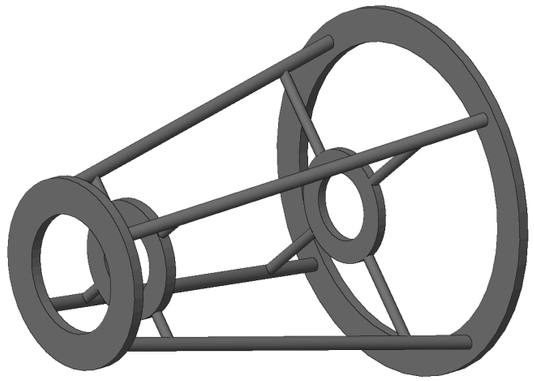


NM8-290 ×1
Nose frame (actuator + electronics carrier)
S355 rings + tube struts
make · 6.0 kg each · drawing NM8-290

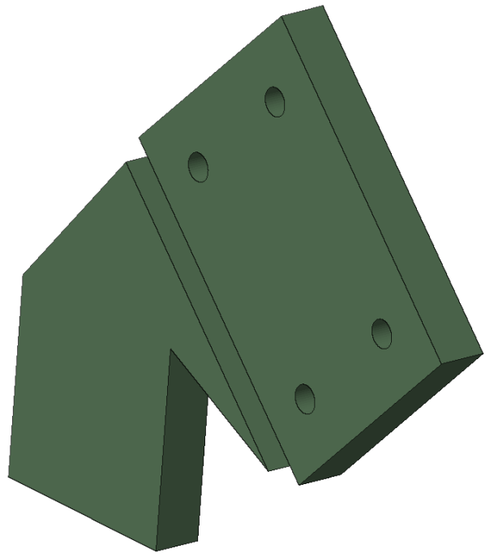


NM8-311 ×1
Third caliper bracket (135°)
S355J2+N 25 plate, welded
make · 7.0 kg each · drawing NM8-311

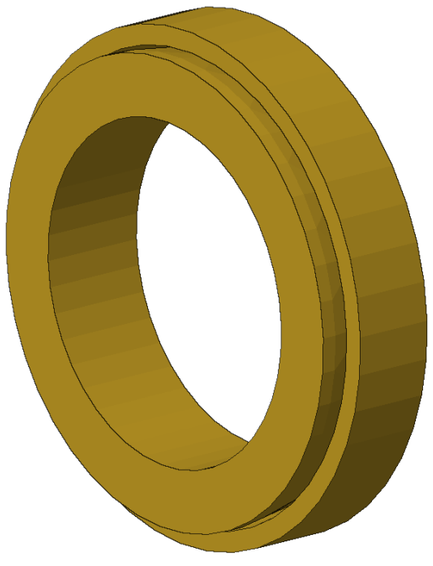


NM8-913 ×2
Tapered roller bearing 32028 X (front + rear)
bought 32028 X
buy · 4.0 kg each · drawing NM8-910

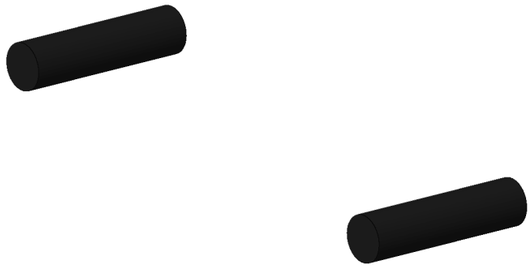


NM8-914 ×1
Overspeed sensors M18 inductive (2, bought)
bought M18 PNP
buy · 0.4 kg each · drawing NM8-910

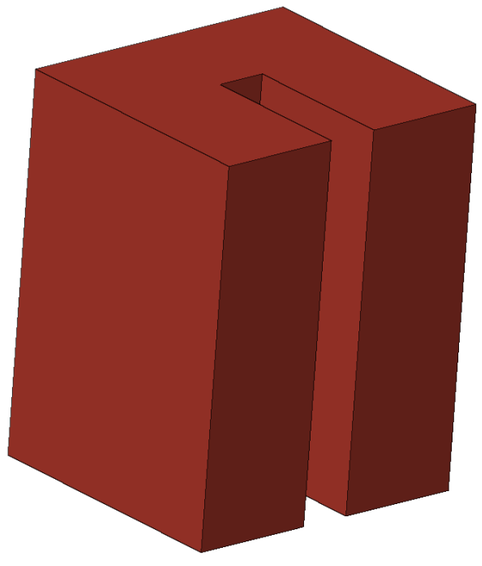


NM8-915 ×3
Spring-applied brake caliper 4.8 kNm (3 on the disc)
bought, spring-applied
buy · 9.0 kg each · drawing NM8-910

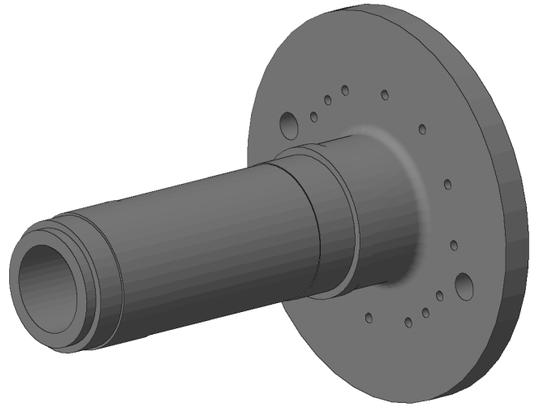


NP1-100D ×1
Spindle Rev D (30 mm longer between the rear seat and the flange)
42CrMo4+QT forged
make · 59.2 kg each · drawing NP1-100D

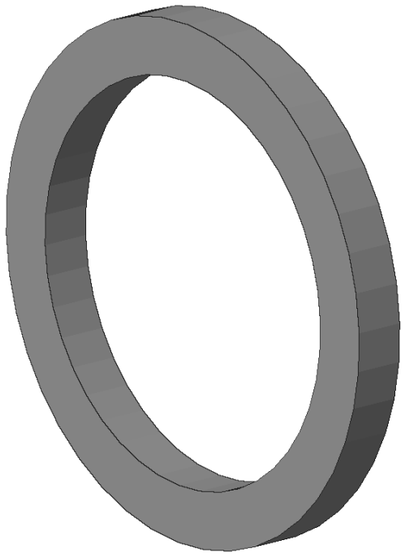


NP1-101 ×1
Front spacer / seal counterface Ø180 (Rev B)
42CrMo4+QT, induction hardened
make · 1.4 kg each · drawing NP1-101

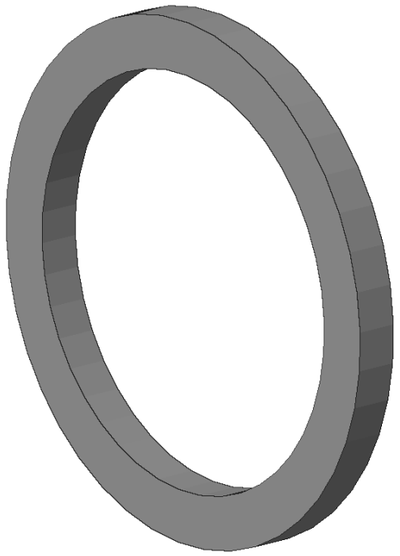

NP1-102 ×1
Rear seal sleeve Ø195 on the Ø155 shoulder (Rev B)
42CrMo4+QT, induction hardened
make · 1.3 kg each · drawing NP1-102

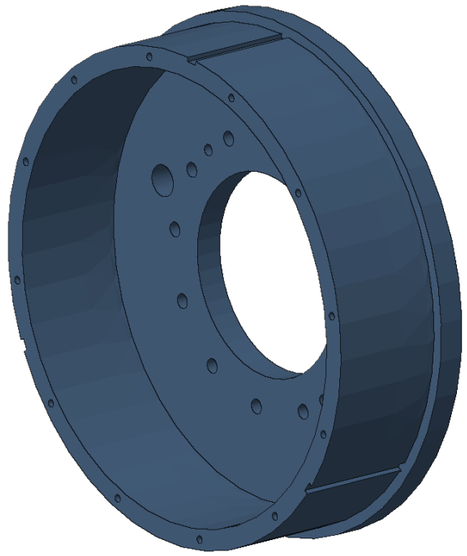


NP1-200D ×1
Stator carrier Rev D, 45 dovetail grooves, rim 104 mm
S355J2+N
make · 45.4 kg each · drawing NP1-200D

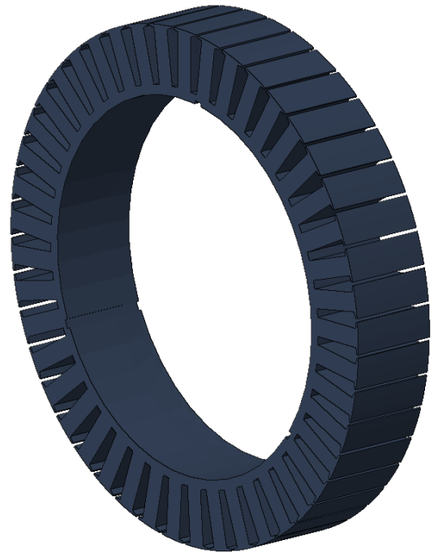


NP1-201D ×1
Stator Rev D: 45 tooth-segment stacks, 104 mm (7 magnet rows)
M270-35A 0.35 mm, self-bonding
make · 71.0 kg each · drawing NP1-201D




NP1-202 ×1
Stator front clamp ring
1.4404 (non-magnetic)
make · 2.2 kg each · drawing NP1-202

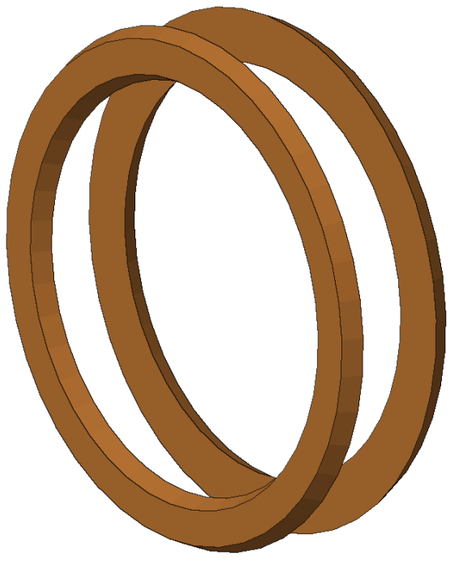


NP1-203D ×1
Coils on segments, 45 × 28 turns, 104 mm stack
Cu enamelled Ø1.55 class 200, NKN 0.30
make · 20.0 kg each · drawing NP1-203D

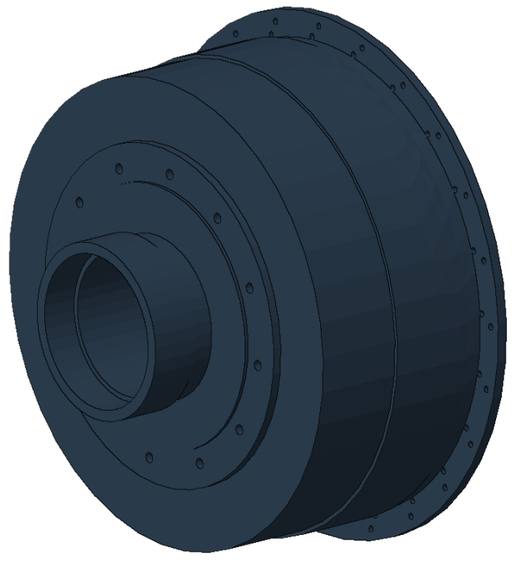


NP1-210D ×1
Rotor drum weldment Rev D (shell +30; Rev C fins and ribs, see NP1-210C)
S355J2+N
make · 95.5 kg each · drawing NP1-210D

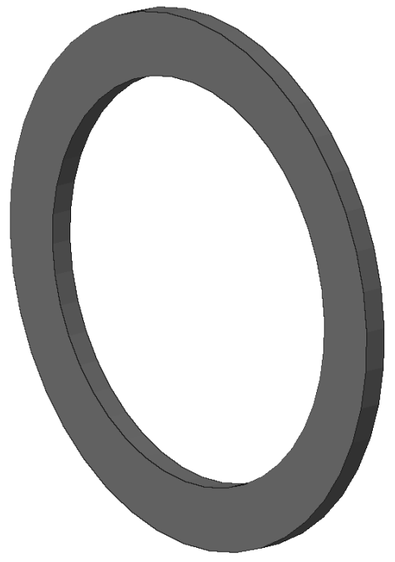

NP1-211-F ×1
Front bearing seal cover
S355J2
make · 1.5 kg each · drawing NP1-211

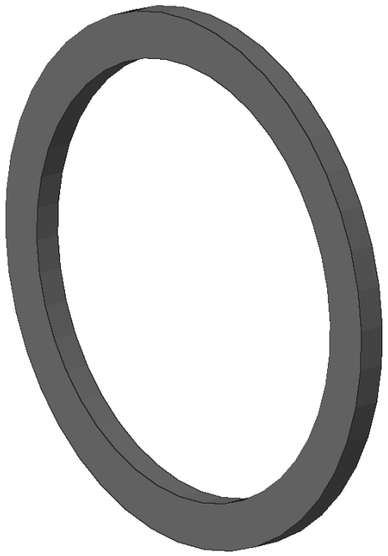


NP1-211-R ×1
Rear bearing seal cover, bore Ø198 (Rev B)
S355J2
make · 1.4 kg each · drawing NP1-211

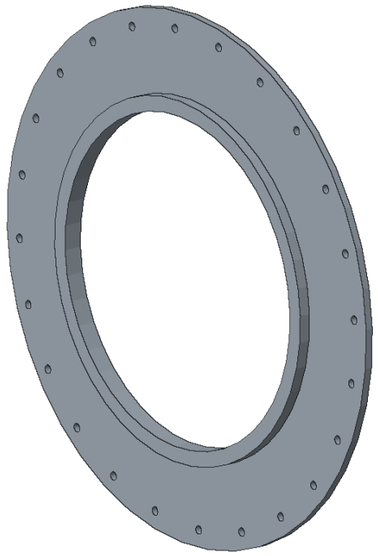


NP1-212C ×1
Drum rear cover with 24 fan blades (Rev C; blades not modelled)
EN AW-5083-H111
make · 7.2 kg each · drawing NP1-212C




NP1-220F ×1
Magnets 280 × N45SH 30×15×12 in 7 rows + comb + sleeve
NdFeB N45SH
make · 15.0 kg each · drawing NP1-220F

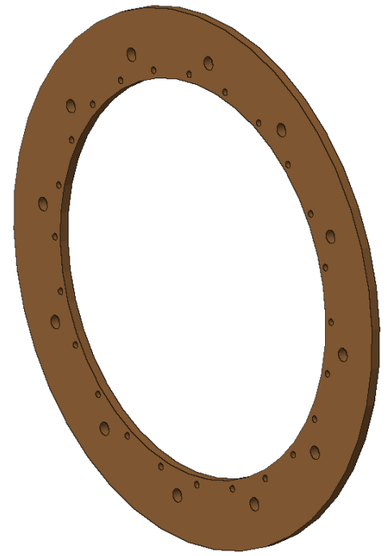


NP1-230 ×1
Brake disc Ø880/Ø652 with 12 lock holes (Rev B)
C45E+N 16 mm
make · 33.6 kg each · drawing NP1-230

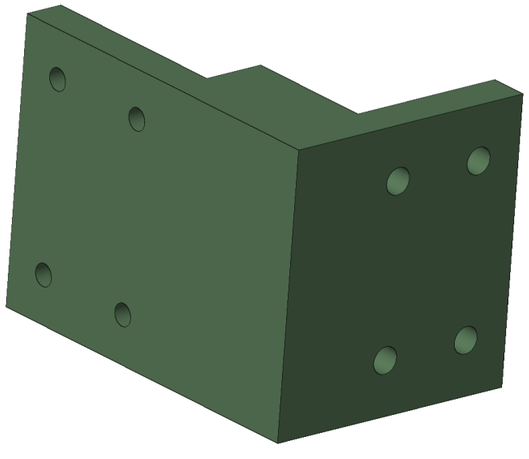


NP1-310 ×1
Rotor brake caliper bracket (left, Rev B)
S355J2+N 25 plate
make · 18.1 kg each · drawing NP1-310

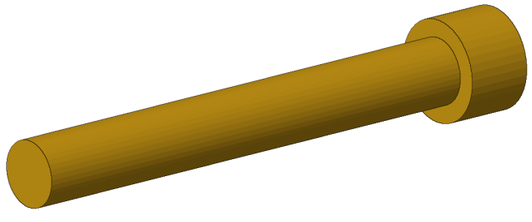


NP1-320 ×1
Rotor lock pin Ø20 (engaged, top)
42CrMo4+QT
make · 0.5 kg each · drawing NP1-320

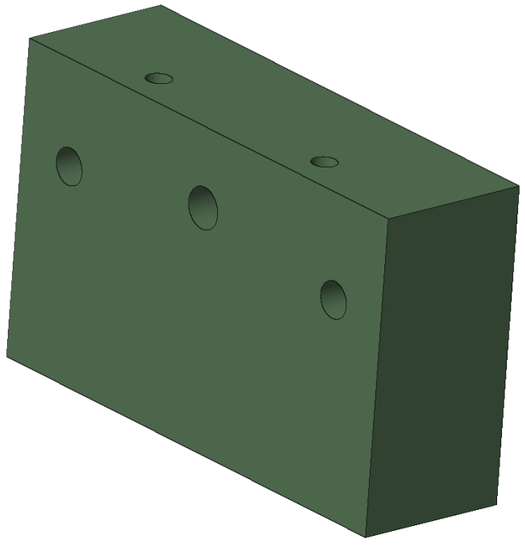

NP1-321 ×1
Lock pin holder with 2 overspeed sensor seats
S355J2
make · 24.5 kg each · drawing NP1-321

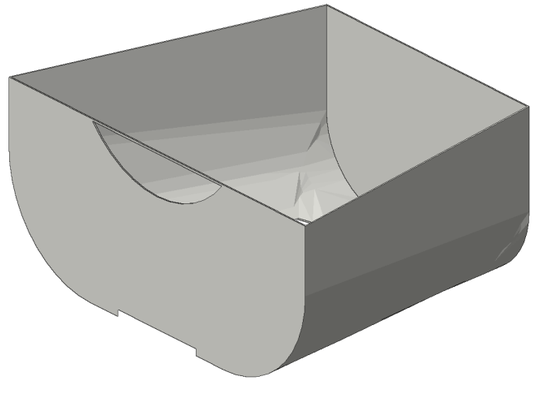


NM8-700-1 ×1
Nacelle cover, lower tray (GRP 5 mm)
glass/polyester, gelcoat RAL 9010
make · 15.7 kg each · drawing NM8-700

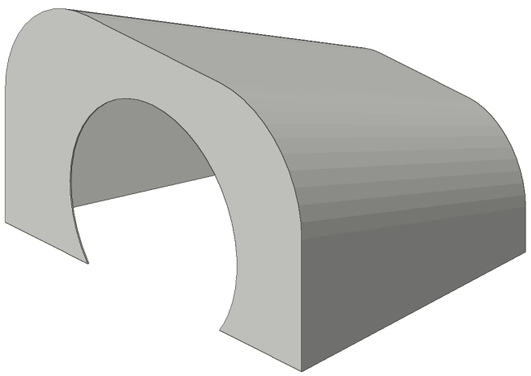

NM8-700-2 ×1

Nacelle cover, upper lid (GRP 5 mm)
glass/polyester, gelcoat RAL 9010
make · 17.7 kg each · drawing NM8-700

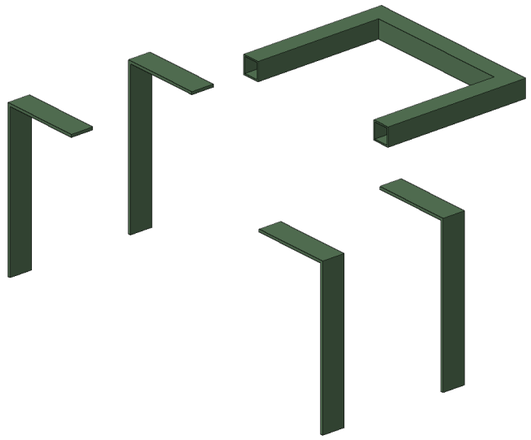


NM8-710 ×1

Cover support arms + rear rail
S235 galv.
make · 8.3 kg each · drawing NM8-710




NM8-720 ×1

Met mast: anemometer, vane, air terminal
1.4404 tube 42.4 × 2 + bought sensors
make · 4.5 kg each · drawing NM8-720

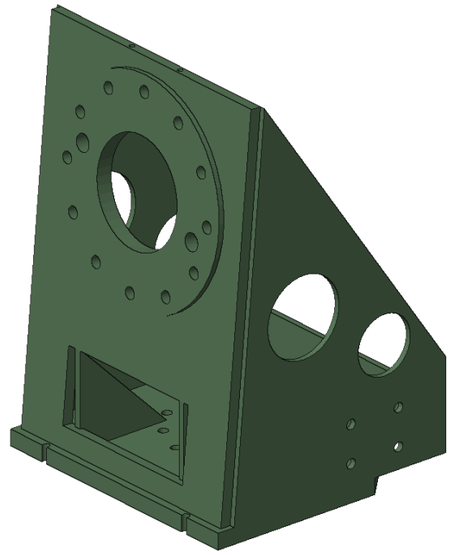


NP8-300 ×1

Bedplate weldment 12 kW NP8 (plates 20 / 30 / 10)
S355J2+N plates, stress relieved, machined
make · 124.3 kg each · drawing NP8-300

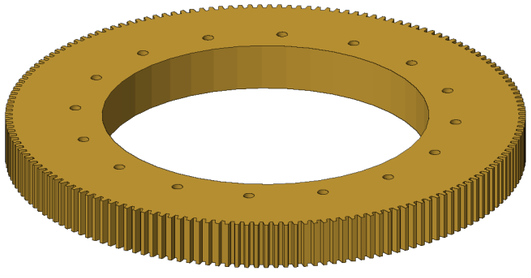


NM8-911 ×1

Yaw slewing ring Dpw 410, z165 m4
bought: 42CrMo4, induction hardened teeth
buy · 66.0 kg each · drawing NM8-911

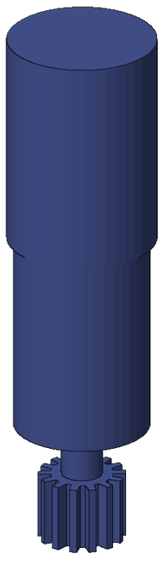


NM8-912 ×2

Yaw gearmotor 0.25 kW, output ≥ 2.3 kNm static, motor brake
bought
buy · 19.0 kg each · drawing NM8-912

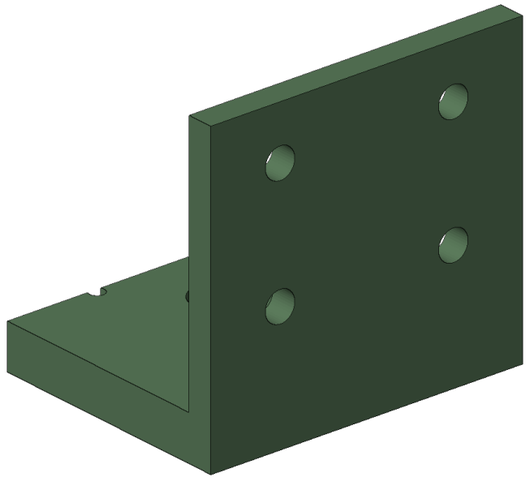


NP1-420 ×2

Yaw drive bracket
S355J2+N
make · 7.7 kg each · drawing NP1-420

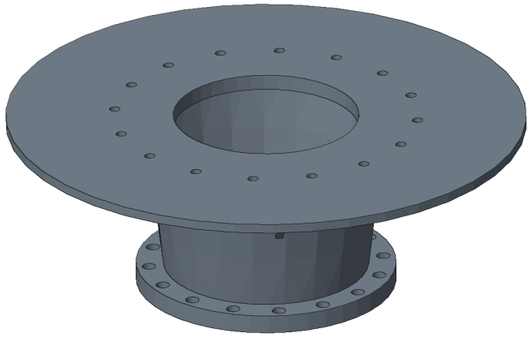


NY-400 ×1


Tower-top adapter with friction track
S355J2+N weldment
make · 118.3 kg each · drawing NY-400

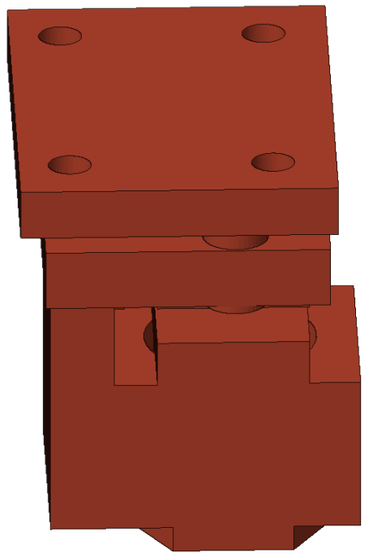


NY-410 ×2
Friction pad unit
S355 / DIN 2093 springs / organic pads
make · 14.0 kg each · drawing NY-410

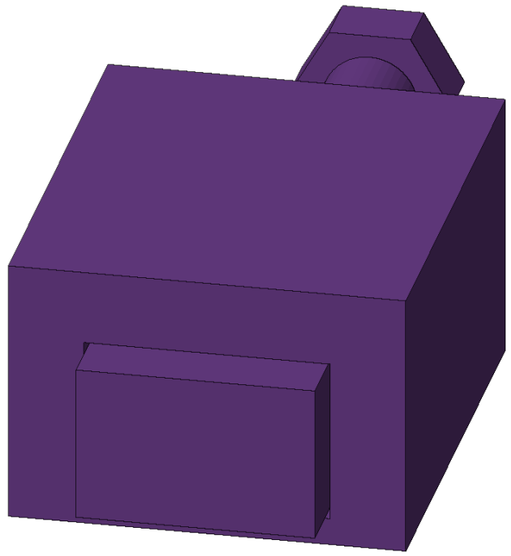


NY-430 ×1
Yaw lock (screw block)
42CrMo4 / S355
make · 6.5 kg each · drawing NY-430

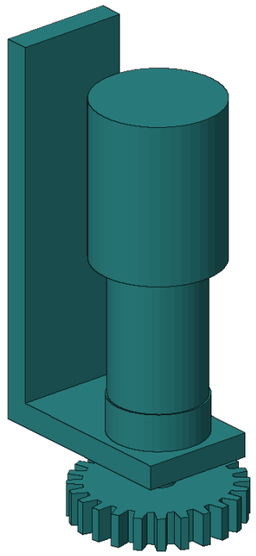


NY-440 ×1
Yaw encoder + cam limit switch unit
S355 + absolute encoder + cam switch
make · 6.0 kg each · drawing NY-440

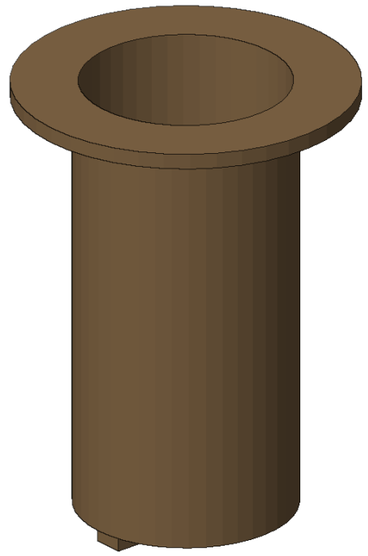


NY-460 ×1
Cable hanger tube + loop cleat
S355 tube 168.3 × 4.5
make · 10.0 kg each · drawing NY-460

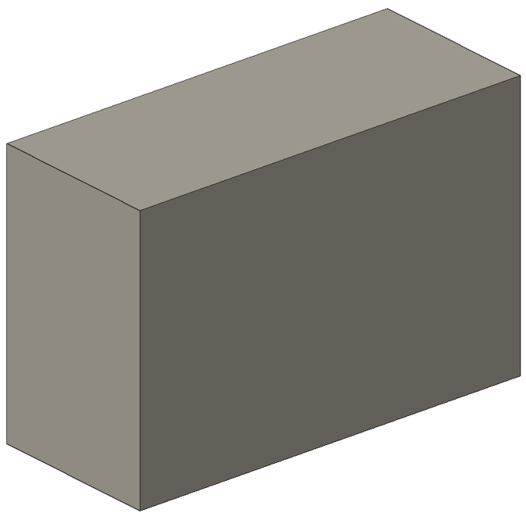


NM8-600 ×1
Braking / dump resistor box (vented)
1.4301 box + steel-grid resistors
make · 18.0 kg each · drawing NM8-600

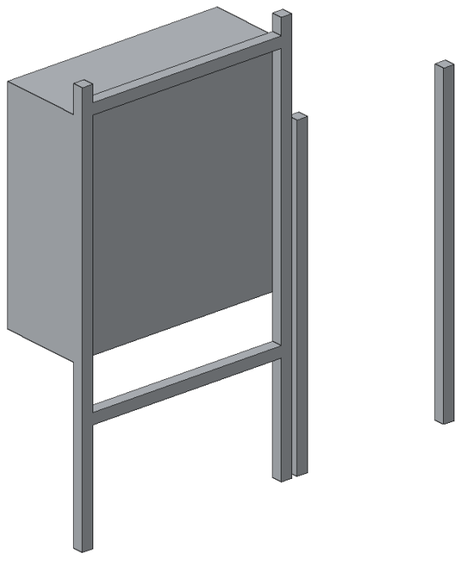


NM8-620 ×1
Tower base cabinet IP55 800 × 600 × 300 on stand
stand S235 galv.; bought enclosure
make · 95.0 kg each · drawing NM8-620

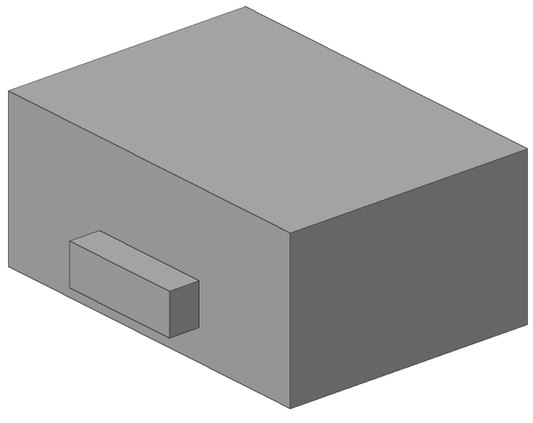


NM8-730 ×1
Nacelle junction box IP66 (400 × 340 × 150)
bought: 1.4301 enclosure
make · 9.0 kg each · drawing NM8-800




NM8-800 ×1
Drop cable + base duct (cabling route)
H07RN-F 4G10 + 2 × LiYCY signal; PE duct Ø110
make · 12.0 kg each · drawing NM8-800




NM8-400 ×1
Tower 8 m, Ø400 → Ø400, t 10/8, one piece
S355J2+N, hot-dip galvanised
make · 699.8 kg each · drawing NM8-400

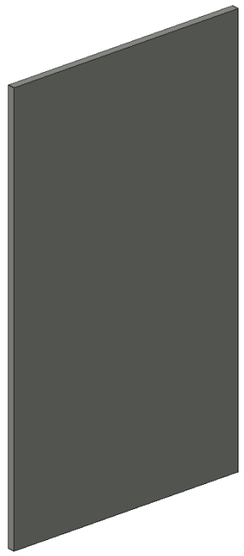


NM8-401 ×1
Hand-hole cover 200 × 350 × 6 with gasket
S355 galv.
make · 3.3 kg each · drawing NM8-400

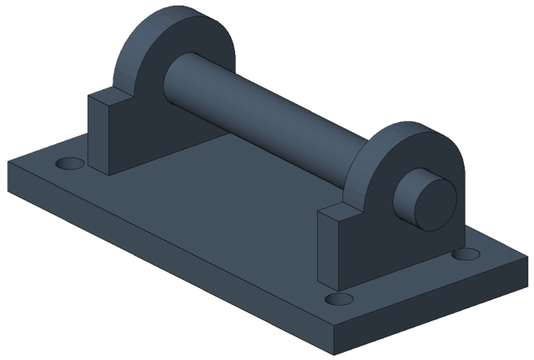


NM8-410 ×1
Base hinge brackets + hinge pin Ø50
S355J2+N galv.; pin 42CrMo4+QT
make · 37.4 kg each · drawing NM8-410

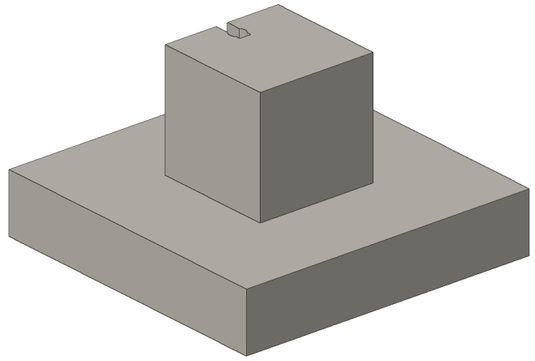


NM8-500 ×1
Spread footing (firm ground) with pedestal
C30/37 XF4 air-entrained, B500C
make · 14880.0 kg each · drawing NM8-500

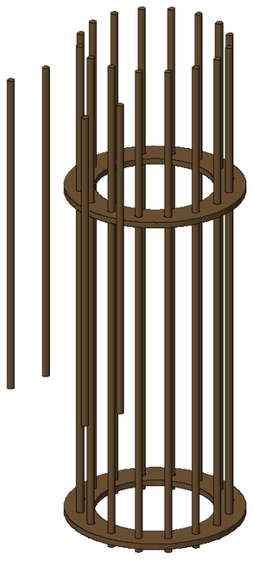

NM8-510 ×1
Anchor cage 16 × M24 + 4 hinge anchors
M24 8.8 HDG threaded rod, S355 template rings
make · 161.7 kg each · drawing NM8-510

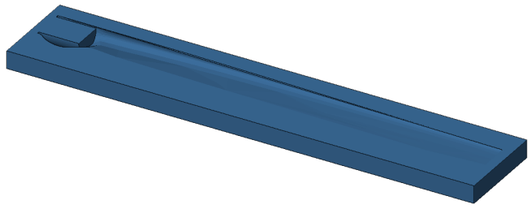


NM8-110-1 ×1
Blade mould, lower (pressure side) half on frame
GRP tooling laminate 12 mm, vinylester tooling gelcoat
make · 118.1 kg each · drawing NM8-110

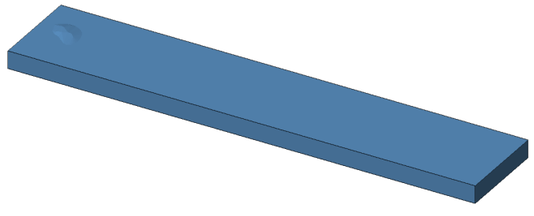

NM8-110-2 ×1
Blade mould, upper (suction side) half
GRP tooling laminate 12 mm
make · 118.1 kg each · drawing NM8-110



NM8-110-3 ×1
Mould frame (RHS 80 × 80 × 4)
S235 RHS 80×80×4
make · 178.6 kg each · drawing NM8-110

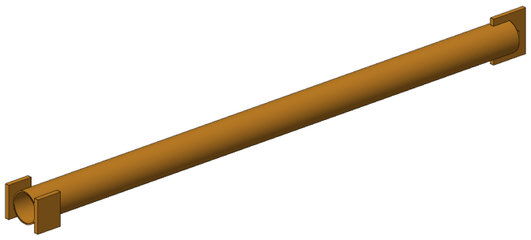

NM8-420 ×1
Gin pole 3.0 m (erection tool)
S355 tube 168.3 × 6.3
make · 94.0 kg each · drawing NM8-420