
SIDE VIEW (wind from the left)



VIEW FROM UPWIND

AXONOMETRIC VIEW (not to scale)

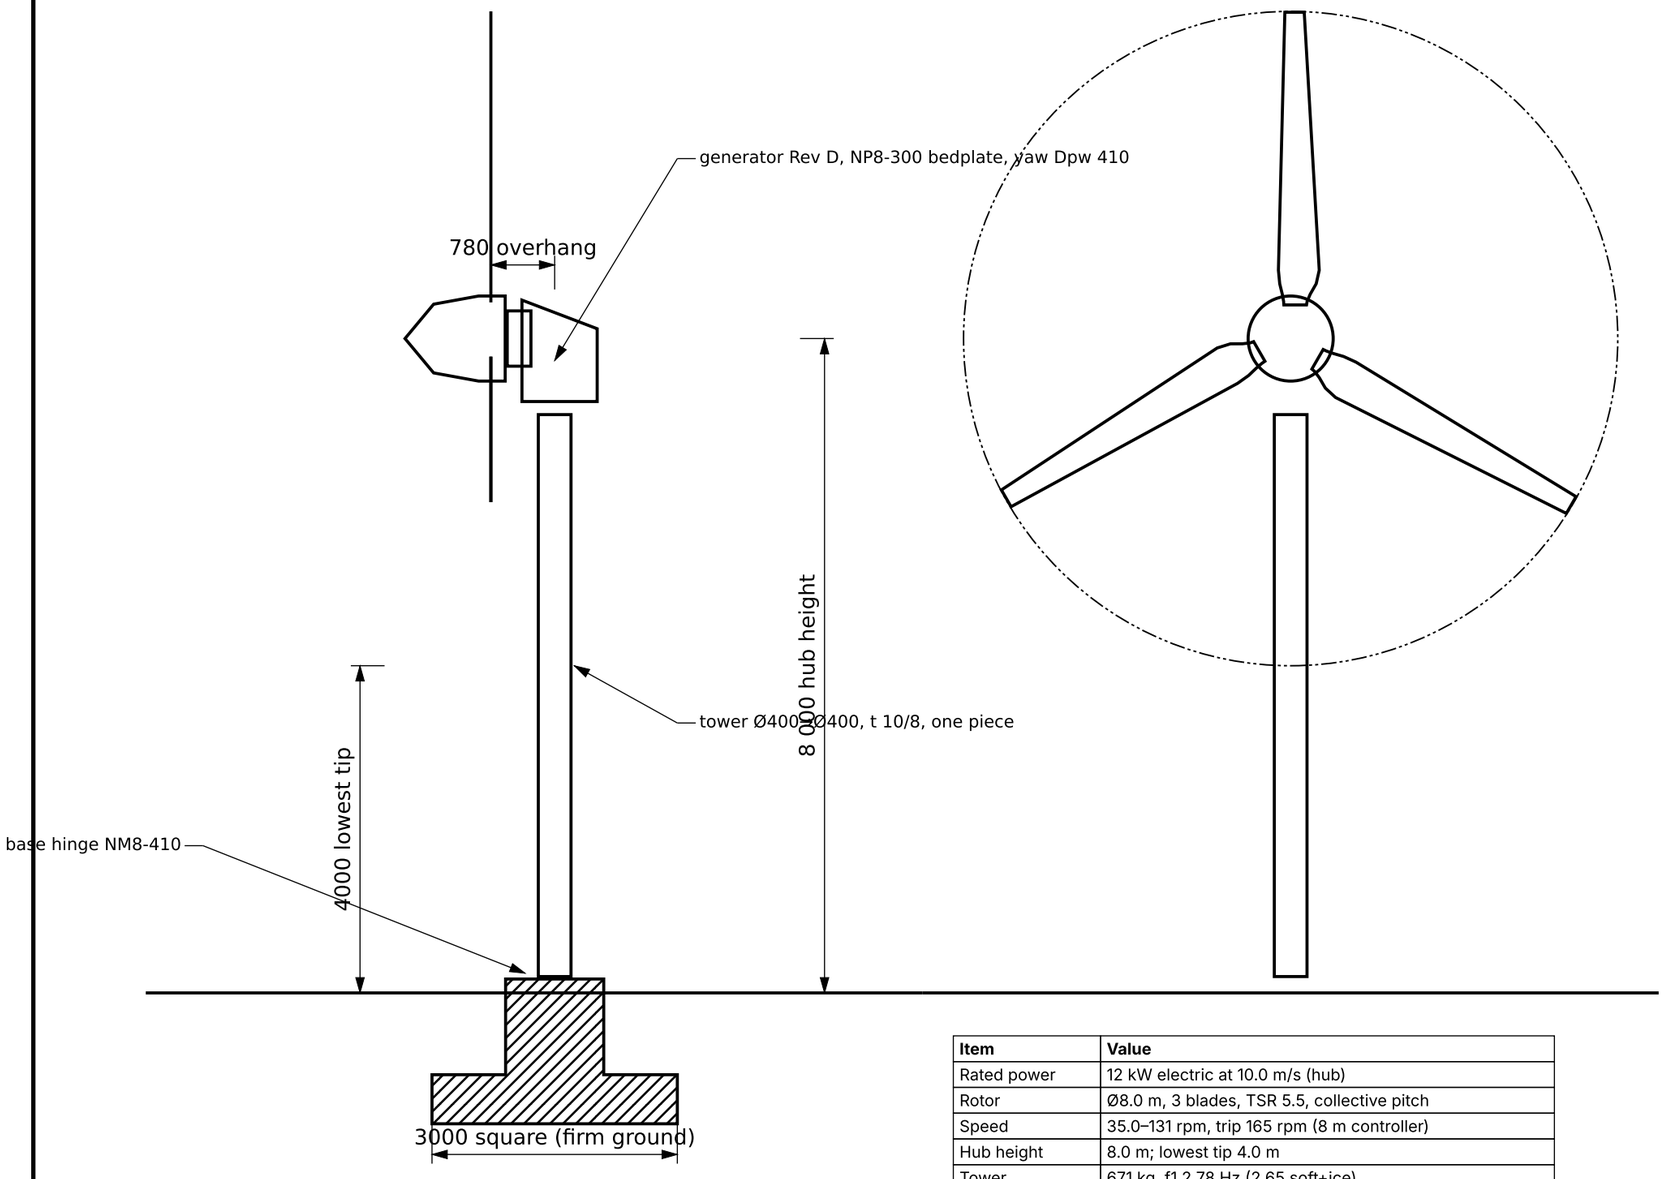

Item	Value
Rated power	12 kW electric at 10.0 m/s (hub)
Rotor	Ø8.0 m, 3 blades, TSR 5.5, collective pitch
Speed	35.0–131 rpm, trip 165 rpm (8 m controller)
Hub height	8.0 m; lowest tip 4.0 m
Tower	671 kg, f1 2.78 Hz (2.65 soft+ice)
Exclusion zone	48–61 rpm (3P × f1)
Head mass	1362 kg above the tower flange (CAD)
Energy vs 18 m	−16 % highland … −27 % inland
Stopping	pitch to feather (supercap) + 3 spring calipers 14.4 kNm
Storm	feathered, idling or braked, yaw active

NOTES

1. Docs 35 and 37. Shared 12 kW parts keep their drawings (index NM8-001). Generator Rev D change sheet NM8-215.
2. Keep people and vehicles out of the rotor disc: fenced zone of radius 5 m round the tower base; lowest tip 4.0 m. Ice-fall zone 1.5 × (H + D) = 24 m when icing is possible.
3. Siting at 8 m: rotor bottom must be clear of the wake of buildings and shelter belts (≥ 20 × obstacle height upwind in the main wind directions); snow drift must stay below 2.5 m.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

GENERAL ARRANGEMENT · 12 kW M8 ON 8 m TOWER

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-000	A · 2026-11-06	1:75
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
see BOM NM8-002/003	≈ 1362 kg head + 671 kg tower	Claude / not checked