

AXONOMETRIC VIEW (not to scale)

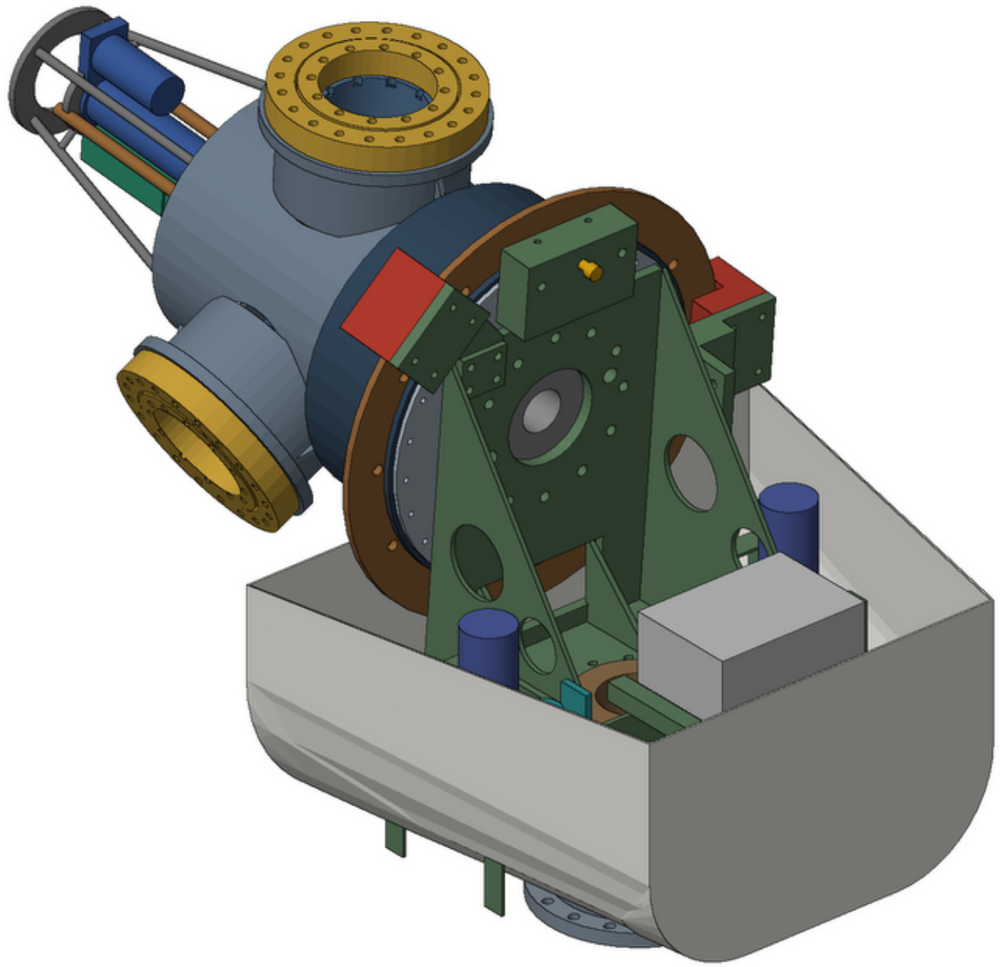

AXONOMETRIC VIEW (not to scale)

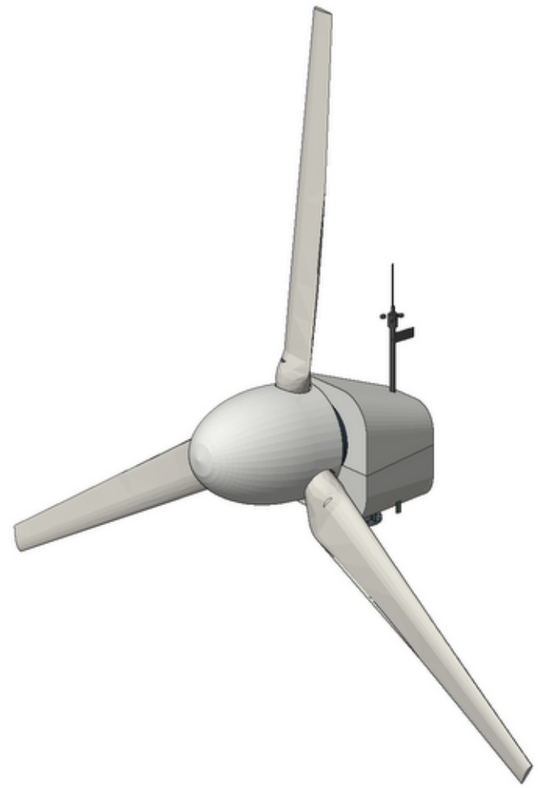

Interface	Value
Rotor plane to yaw axis	780 mm (doc 35 overhang; 750 + 30 Rev D)
Rotor centre above yaw bearing top	570 mm; shaft tilt 5°
Generator Rev D	stack 104 mm, 7 rows, 280 blocks, 28 turns
Stretch plane	spindle x 410: parts ahead move 30 mm forward
Bearings	2 × 32028 X, span 240 (unchanged)
Brake	3 spring calipers at 0°, 135°, 180° (lock pin at 90°)
Bedplate	NP8-300, 136 kg (plate model), util 0.68
Yaw	ring Dpw 410 z165 m4, 2 gearmotors, 2 pad units
Hub to drum	12 × M16 10.9 PCD 400, Ø360 spigot
Spindle to bedplate	12 × M20 10.9 PCD 350, Ø200 spigot

NOTES

1. A03: nacelle with the upper cover lid, met mast, spinner and blades removed, seen from the rear left. A02: complete head.
2. Whole-turbine interference check (cad/turbine_m8/clash8.py): no clashes left except intended fits (spigots, pins in eyes, bolts in tapped holes, embedded anchors, gear mesh contact) - list in doc 37 §6.
3. The hub, drum, stator and spindle front move 30 mm forward together, so all front interfaces (hub spigot, bearing seats, seal covers) are as drawn on the Rev B/C sheets; only the lengths in NM8-215 change.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

GENERAL ARRANGEMENT · NACELLE AND DRIVETRAIN

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-010	A · 2026-11-06	–
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
see BOM	≈ 1362 kg above the tower flange	Claude / not checked