

PLANFORM (suction side up, leading edge up)



FACE

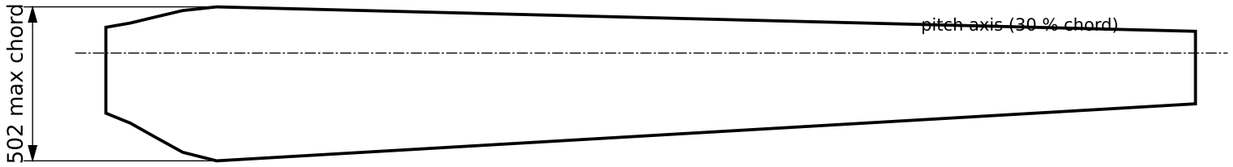

AXONOMETRIC VIEW (not to scale)

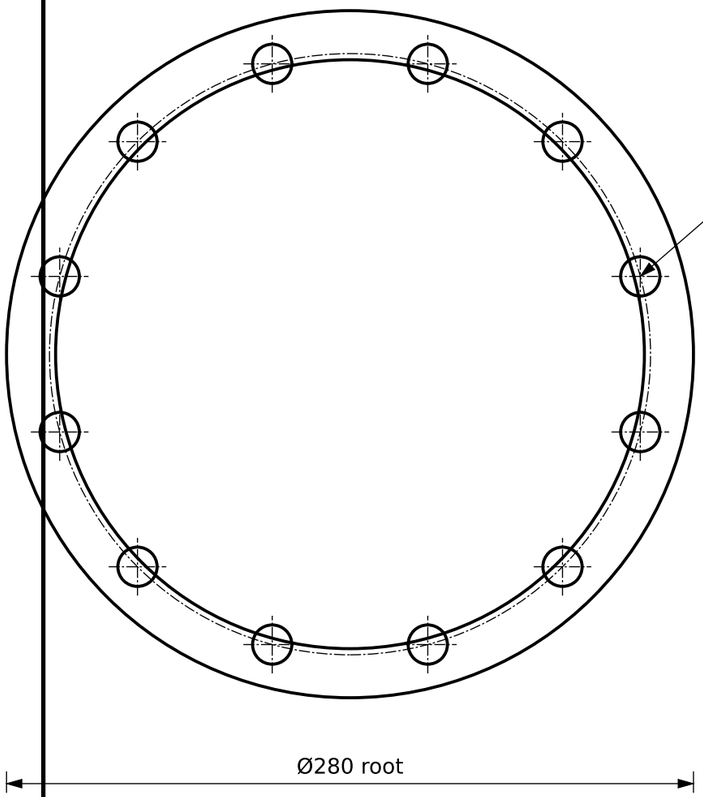

r mm	chord mm	twist °	t/c
450	280	20.0	0.91
600	389	20.0	0.64
800	501	20.0	0.30
1000	486	18.4	0.29
1400	452	12.6	0.26
1800	419	9.0	0.24
2200	386	6.5	0.22
2600	352	4.7	0.20
3000	319	3.4	0.19
3400	286	2.3	0.18
3800	253	1.5	0.18
4000	236	1.2	0.18

NOTES

1. Twist relative to the pitch reference at −2° setting (blade at its fine end stop). Aerofoil family as doc 10, thickness scaled to the 4.0 m span (structure_m8.py).
2. Laminate: doc 10 construction scaled; carbon UD caps sized by buckling. Mass 34.1 kg; flap frequency ≈ 18.8 Hz at rated (3P 6.6 Hz).
3. Root: 12 bonded inserts M16 on PCD 245 (bolt force 64 kN design, F_t,Rd 113 kN). Root face machined flat 0.1 after cure, square to the pitch axis 0.1°.
4. First-article static test SLM H × 1.35 flap, edge test, insert pull-out (3 per batch). Balance set to 0.5 % static moment.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

BLADE Ø8.0 m · PLANFORM, TWIST AND ROOT

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-100	A · 2026-11-06	1:20
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
E-glass/epoxy infused; carbon UD caps; PVC core 34.1 kg		Claude / not checked