
AXONOMETRIC VIEW (not to scale)

SECTION (6 bond grooves)

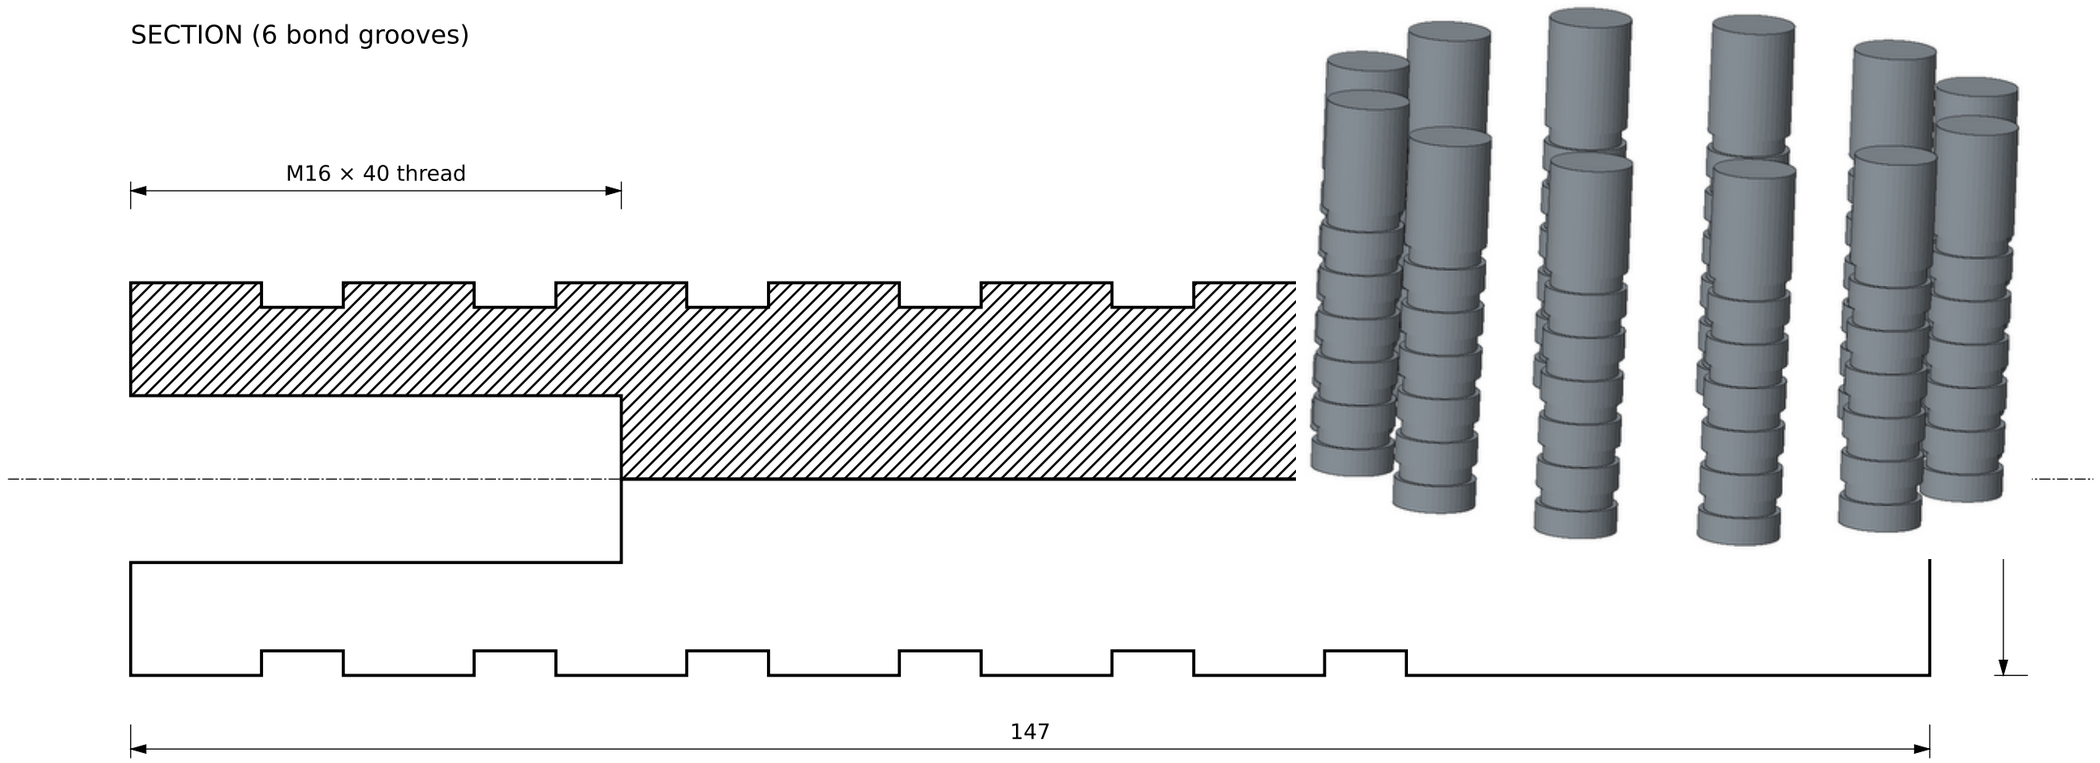

NOTES

1. The doc 34 M12 insert scaled 4/3: Ø32 × 147, internal M16-6H 40 deep, 6 grooves 2 deep for the bond.
2. Bonded into the root laminate with the NM8-115 fixture (12 spigots on PCD 245, as NS6-115 with the M8 pattern).
3. Pull-out test 3 per batch to 1.5 × 64 kN; thread gauge every insert.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

BLADE ROOT INSERT M16 (BONDED)

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-105	A · 2026-11-06	2:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
C45E+QT, zinc-flake coated (Geomet 500)	0.78 kg	Claude / not checked