
AXONOMETRIC VIEW (not to scale)

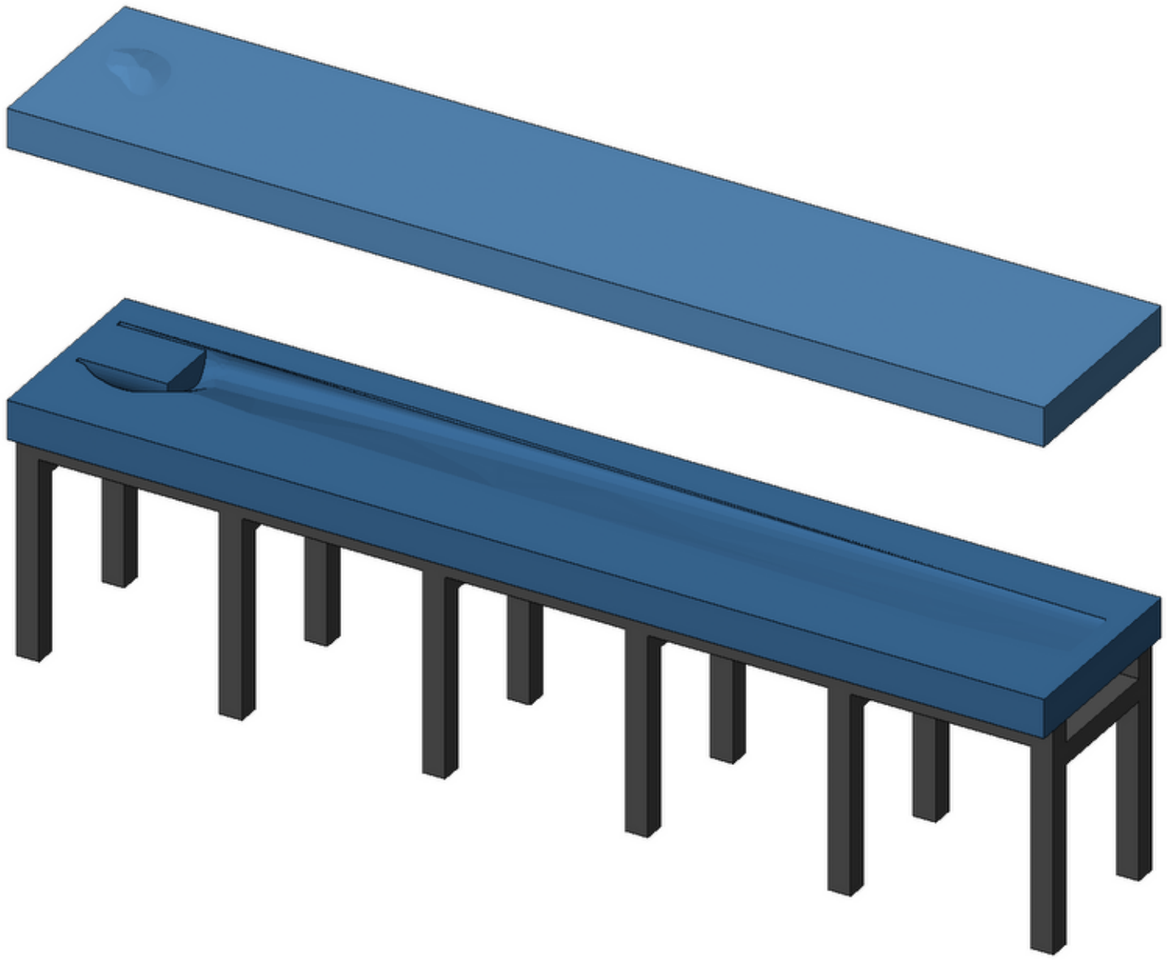

NOTES

1. Same construction as NS6-110 (doc 34), lengthened for the 3.56 m M8 blade: CNC-machined plug from the NM8-100 surfaces, GRP halves 12 mm with vinylester tooling gelcoat, steel frame RHS 80 × 80 × 4.
2. Parting line on the leading/trailing edge; root end with the NM8-115 insert fixture flange; 6 locating cones.
3. Mould acceptance: blade profile within 0.5 mm of the plug at 10 stations; twist within 0.2°.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

BLADE MOULD SET (PLUG, TWO HALVES, FRAME)

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-110	A · 2026-11-06	–
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
GRP tooling laminate on S235 RHS frame	≈ 2 × 118 kg + frame 179 kg	Claude / not checked