

HALF SECTION / VIEW

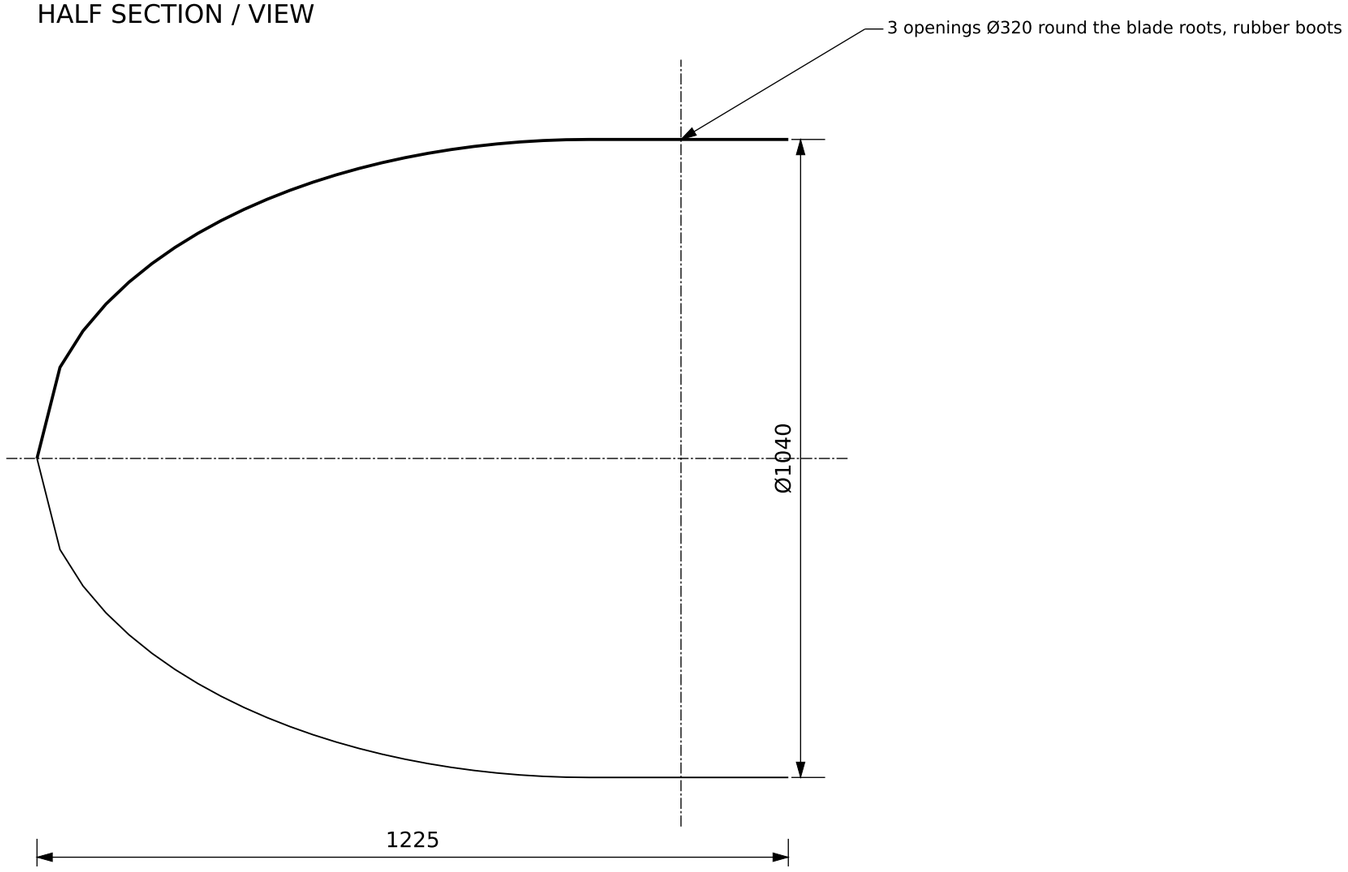

AXONOMETRIC VIEW (not to scale)

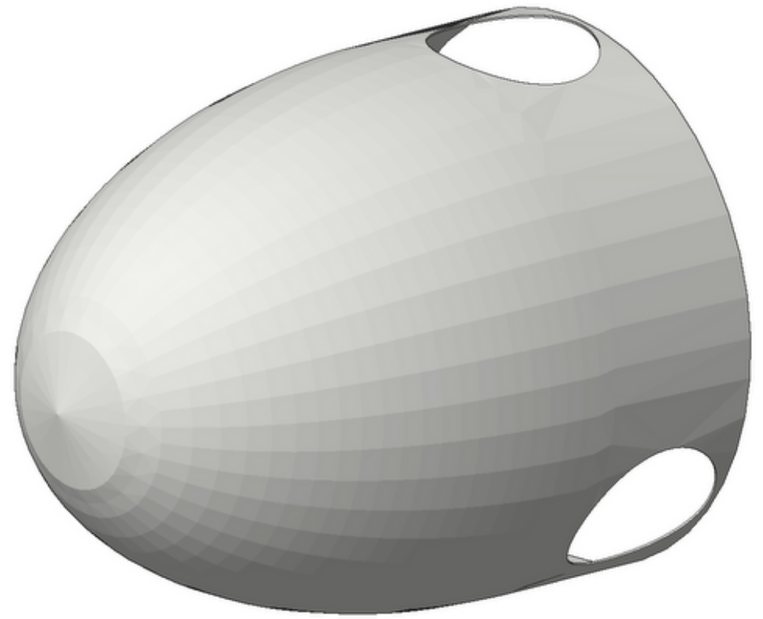

NOTES

1. Ogive nose to r 520 at x −150, cylindrical to the base ring at x 175 (spindle frame, rotor plane x 0). 4 mm glass/polyester, 3 split segments with flanged joints.
2. Encloses the pitch bearings (outer edge r 485), the nose frame and the cylinder; inspection hatch Ø200 at the nose for the slip ring and the pitch electronics.
3. Fixed to the hub front ring and neck flanges with 9 brackets (A4 M8), 10 mm clearance to all moving pitch parts.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

SPINNER (GRP) WITH BLADE BOOTS

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-210	A · 2026-11-06	1:10
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
glass/polyester 4 mm, gelcoat RAL 9010	27.6 kg	Claude / not checked