
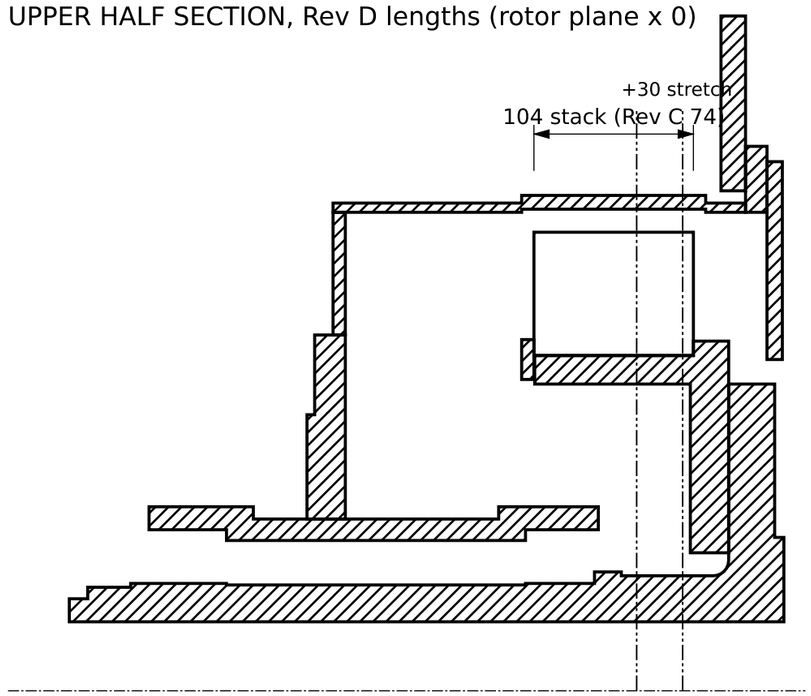


Part	Rev C	Rev D
NP1-100D spindle	x 40–476	x 40–506 (Ø150 section 400–460)
NP1-200D stator carrier	rim 74	rim 104, web unchanged
NP1-201D stator	5 rows, 74 mm	7 rows, 104 mm
NP1-203D coils	28 turns	28 turns, longer side (turn +60 mm)
NP1-210D drum	shell 239	shell 269; fins/ribs as Rev C
NP1-220F magnets	200 blocks	280 blocks (+14 spare)
Torque rated	730 Nm	991 Nm
Line EMF 100 °C	372.0 V	384.8 V
Efficiency rated	0.9334	0.9296
Drum stability margin	302	237


NOTES

1. All Rev C drawings stay valid with the lengths of this sheet: every feature ahead of spindle x 410 keeps its Rev C distance to the rotor plane, every feature behind x 410 moves 30 mm aft (bedplate, disc, calipers, rear cover).
2. Spindle check with Rev D lengths and M8 loads: static reserve 2.5, bearings s0 6.7 / 6.2, life factor 5.6 (spindle_m8.py).
3. Cooling as Rev C (36 inner fins, 48 outer ribs, 24 cover blades); hot spot 117 °C at 110 % (generator_m8_cooling.json). Fins and ribs are not in the 3D model.
4. Magnet comb and sleeve lengthened by 30; skew step 0.143° between the 7 rows (±0.43°).

AXONOMETRIC VIEW (not to scale)

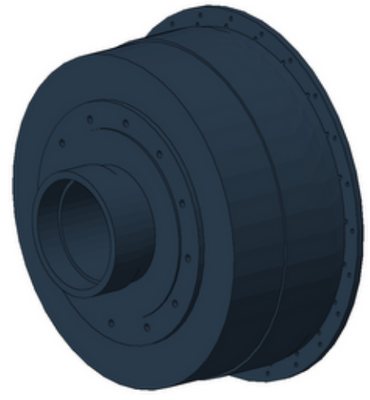

AXONOMETRIC VIEW (not to scale)

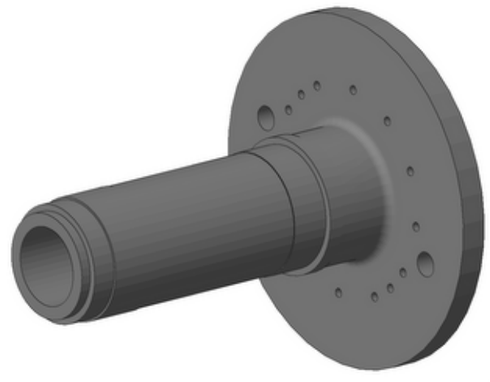

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

GENERATOR REV D · CHANGE SHEET (STACK 74 → 104 mm)

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-215	A · 2026-11-06	1:4
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
as Rev C sheets	322 kg generator	Claude / not checked