

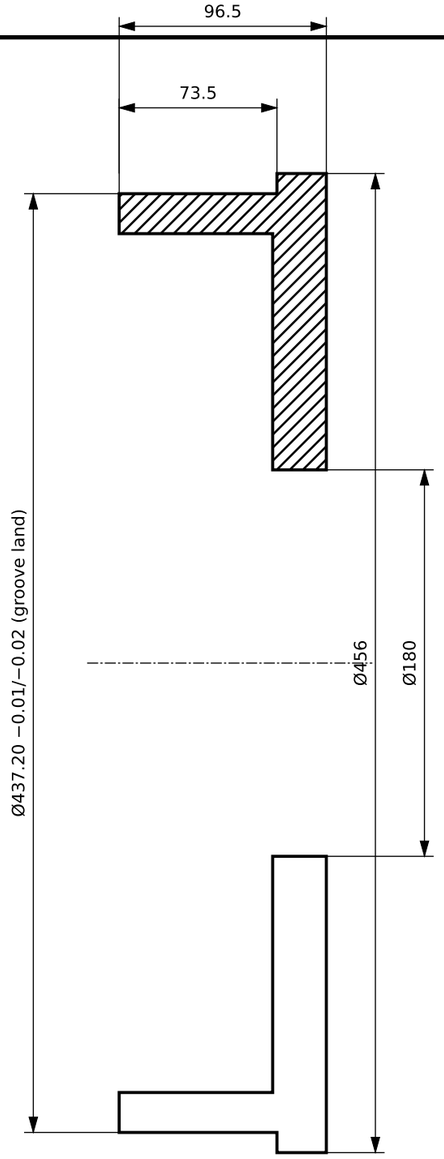


SECTION A-A (1:2.86)

VIEW B (from front, 1:3.6)

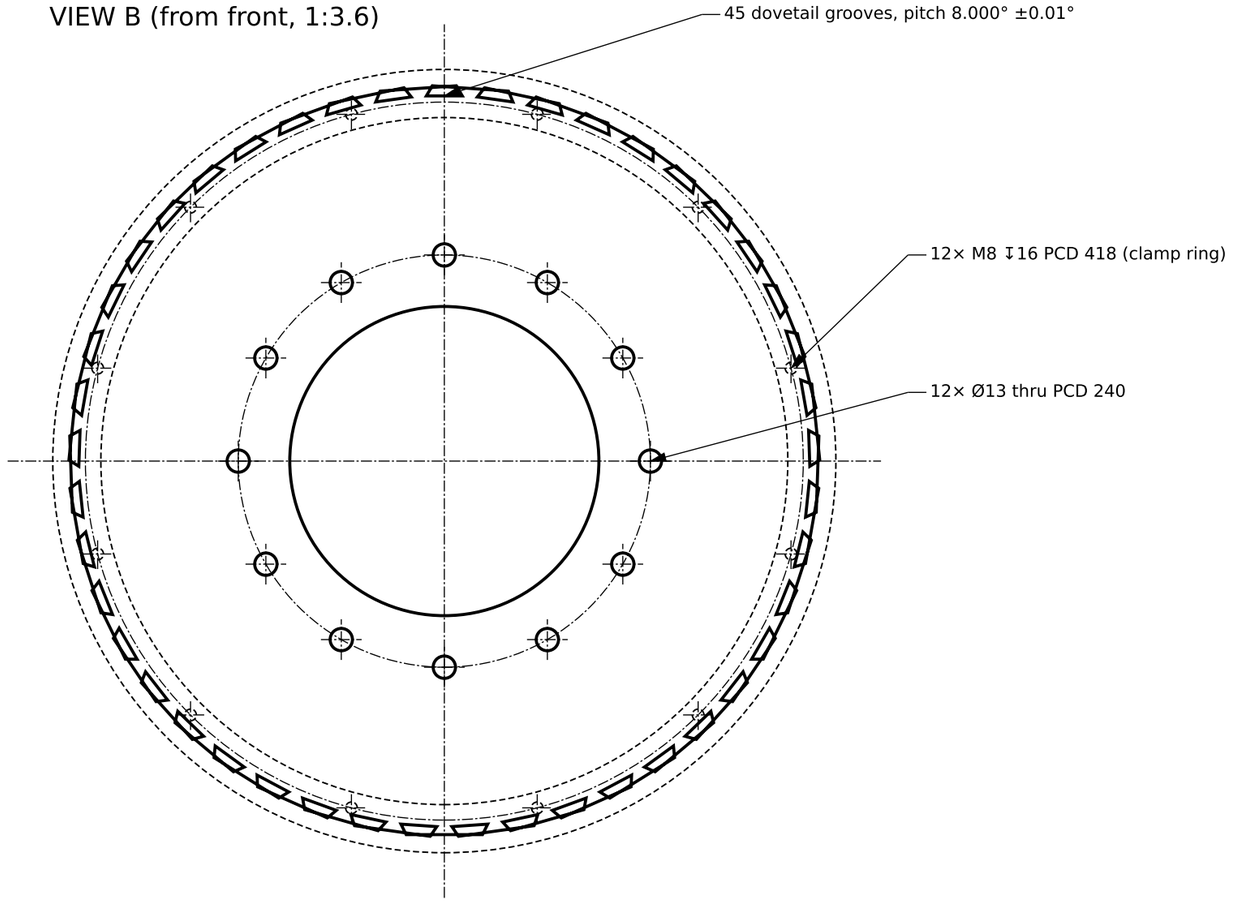

DETAIL C: GROOVE (5:1), flanks 60°

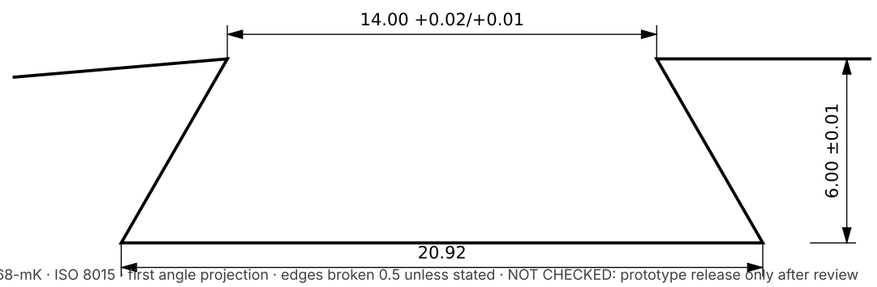

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

NOTES

1. Rev C (doc 18 §5.1): grooves replace the shrink fit and the 3 keys. Grooves open to the front (x 343.5), closed by the rear stack stop (x 417); broached or wire-EDM.
2. Groove angular position ±0.01°, groove seat radius R212.60 ±0.01 to the bolting-face axis; foot clearance 0.01 to 0.03 (slides by hand when clean), fixed by VPI resin, clamped by NP1-202 (12× M8 A4-80, 20 Nm).
3. Run-out of groove lands and rear stop face to the bolting face and Ø180 spigot ≤ 0.02; bolting face flatness 0.02.
4. Bolt to the spindle flange: 12× M12 10.9 + hardened washers, 110 Nm, 2 fitted dowels Ø10 H7 PCD 240; Al-filled paste 0.05 on the full face (heat path, doc 14 §6).
5. Stress relieve 580 to 620 °C, 2 h, before final machining. No paint on grooves and bolting face; elsewhere epoxy primer 60 µm.

12 kW WIND TURBINE (ICELAND) · GENERATOR REV C (DOC 23)

STATOR CARRIER WITH 45 DOVETAIL GROOVES

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-200C	C · 2026-11-05	1:2.86 / 1:3.6 / 5:1
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N ring forging or plate, stress relieved	40.6 kg	Claude / not checked